


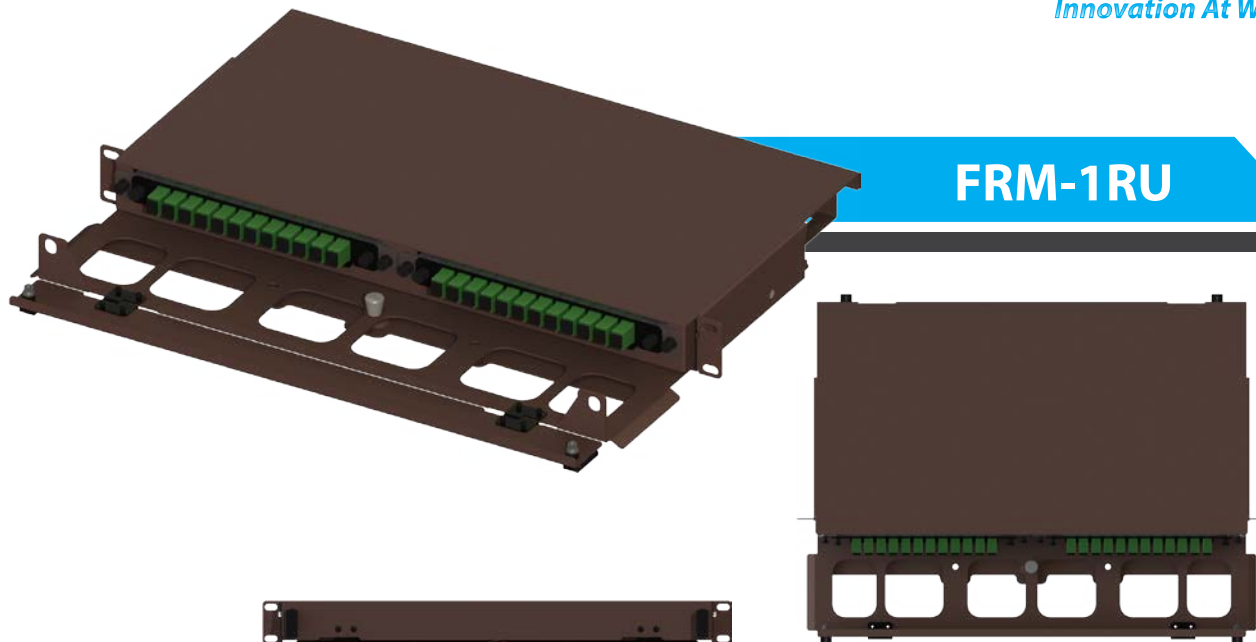

FRM-1RU

Product Description

Multilink's Signature Series offers a complete line of fiber patch panel products (both wall and rack mount) for our CT-X cassette. Multilink's CT-X cassette offers a system wide modular solution for fiber connectivity. The CT-X cassette is fully integrated with each Signature Series product including the FRM-1RU. It can hold up to (2) CT-X cassettes or (3) FTM adapter panels.

Each Signature Series rack mount allows for a non-captive cable entrances allow pre-connectorized cable assemblies to be easily installed. Each Signature Series rack mount is built from either Aluminum or Steel with our unique bronze polyester powder coat finish to provide extreme durability. The FRM-1RU uses a spring plunger to secure the rack in place to prevent any sudden movements that could potentially cause damage by the tray falling out of place.


Features & Benefits

- Signature Series bronze powder coated finish.
- Removable door panel for additional room for access.
- Optional assembly to have a fixed door panel is available.
- Option to silk screen custom logo on front panel (*additional silk screening cost*).
- Swell latches allow for maximum compression for both door panel and rack top.
- Spring plunger allows for rack to securely lock when opening and a fixed closed position.
- Various bulkhead brackets allow for both FTM modules and CT-X cassettes to be used.

Specifications

Parameter	Specification
Dimensions:	19" W x 1.75" H x 14.19" D
Weight:	15 lbs
Material:	Aluminum & Steel
Finish:	Bronze Powder Coat
Capacity:	(2) CT-X Cassettes or (3) FTM Modules
Rack Cover:	Door Panel (Option to silk screen w/ custom logo)

Accessories






FRM-1RU Accessories		
Products	Description	Stock ID
	Strain Relief Kit (1RU)	065-249-10
	FRM-1RU CT-X Bulkhead Bracket Kit	072-208-50
	FRM-1RU FTM Bulkhead Bracket Kit	072-208-20
	FTM Blank Plate	10-7666
	CT-X Blank Plate	065-822-11

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com

Dimensional Drawings

045-665-00

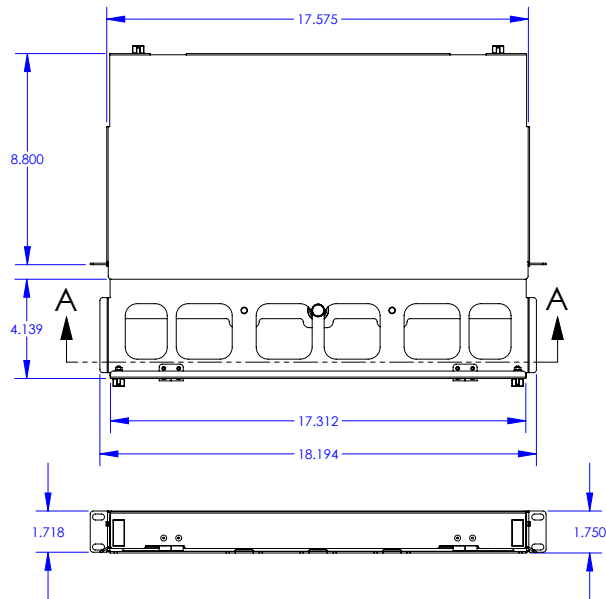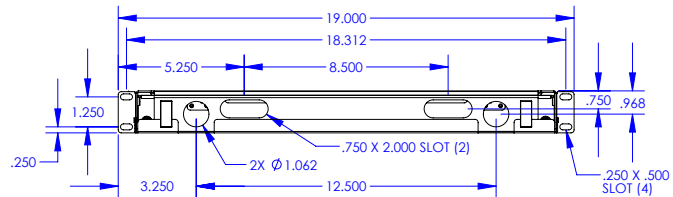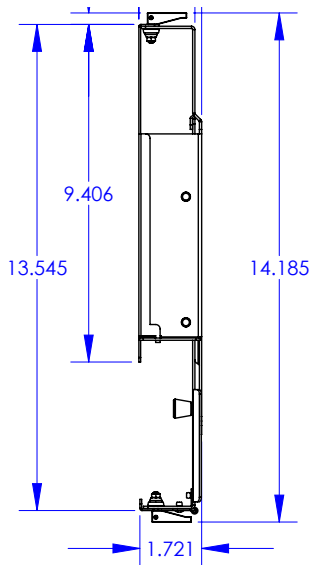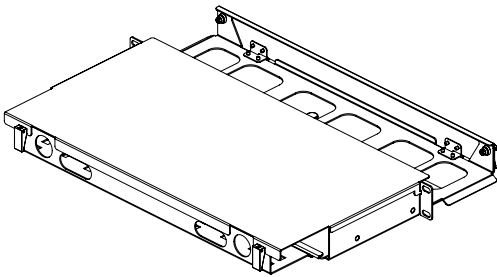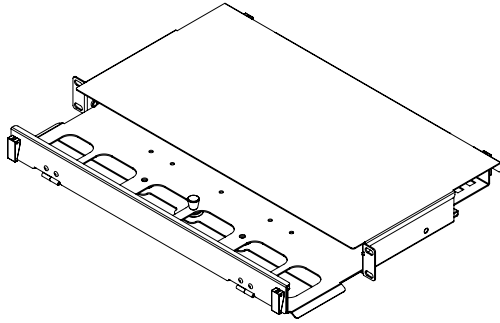

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Ordering Guide

FRM-1RU	-		-		-		-		-		-		-		-		-	
		1		2		3		4		5		6		7		8		

1	Module
FTM	FTM Module
CT-X	CT-X Cassette

2	# of Modules
01	1 Module
02	2 Modules
03	3 Modules*

**FTM Module Only*

3	Module Style
P	Patch
S	Splice
M	MPO

4	Adapter Type
SCA	SC/APC SM 900µm
SCU	SC/UPC SM 900µm
LCA	LC/APC SM 900µm
LCU	LC/UPC SM 900µm
SC1	SC/PC OM1 62.5µm
SC2	SC/PC OM2 50µm
SC3	SC/PC OM3 50µm
SC4	SC/PC OM4 50µm
LC1	LC/PC OM1 62.5µm
LC2	LC/PC OM2 50µm
LC3	LC/PC OM3 50µm
LC4	LC/PC OM4 50µm
ST1*	ST/UPC SM
ST2*	ST/PC MM

**FTM Module Only*

5	# of Conn. / Module
06	6 Fiber
12	12 Fiber
24*	24 Fiber

**LC Adapters Only*

6	Fiber Type
9	900µm
R	Ribbon
LT	Loose Tube
J	Jumper

8	Fiber Jacket
SW	Spiral Wrap*
OFR	OFNR
OFP	OFNP
OP	OSP

**Splice Style Only*

8	Pigtail Length
.5	.5 Meter*
1M	1 Meter
3M	3 Meters
XX	Custom (Specify Length)

**MPO Only*

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com



Multilink Inc.
580 Ternes Ln
Elyria, OH 44035
Tel: (440) 366-6966
Fax: (440) 366-6802



facebook.com/GoMultilink



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2016 • All Rights Reserved

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com