


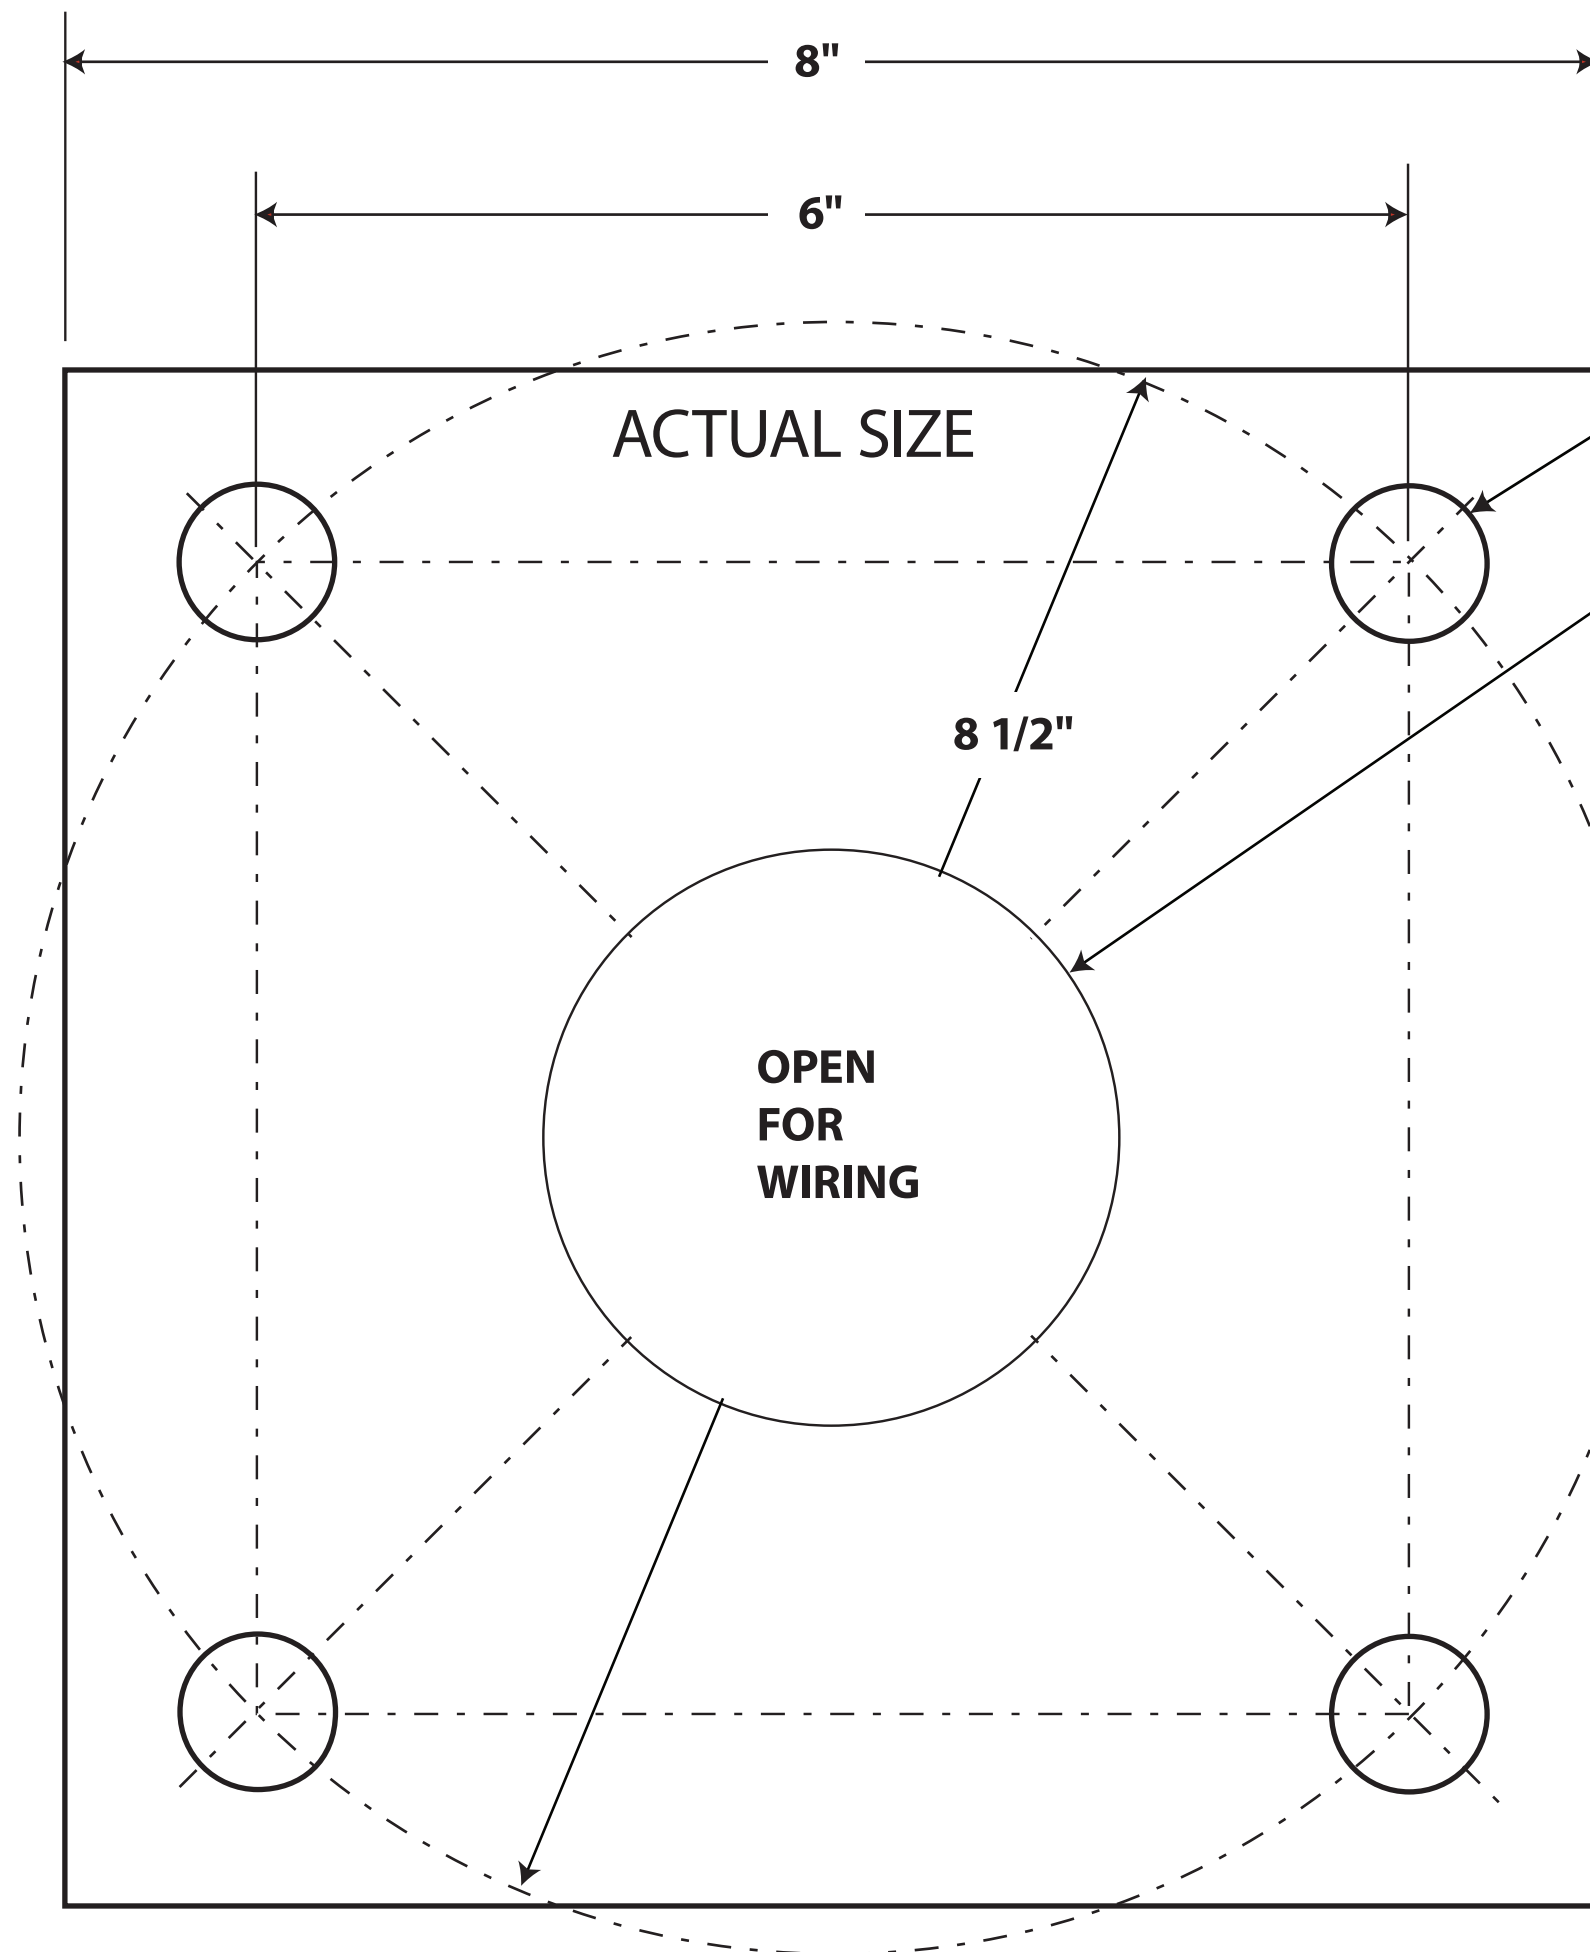


ANCHOR BOLT TEMPLATE 4" SQUARE POLES

- Verify bolt circle diameter and anchor bolt projection.
- Use anchor bolt template to assure accuracy.
- Drill holes in plywood and use as a locator for anchor bolts.

**13/16" diameter
(4 places)**

**3" diameter
wiring access hole**

8 1/2" diameter bolt circle

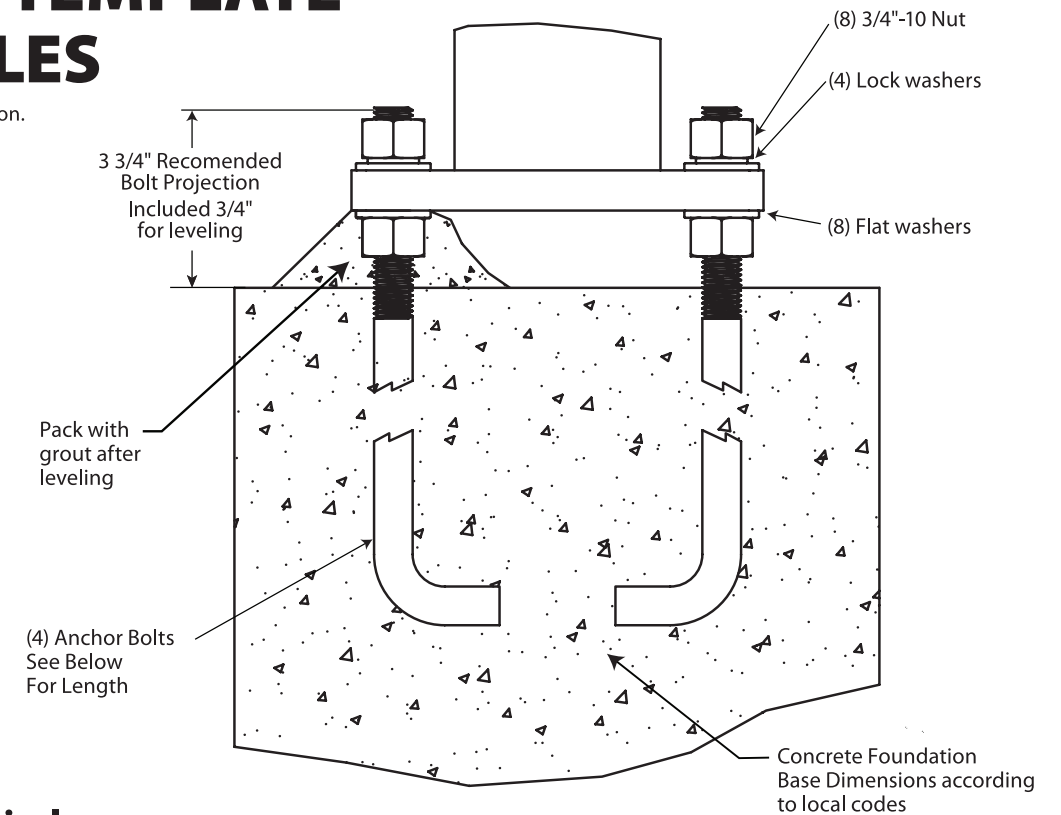

ABK4-11 with 18.75" Anchor Bolts Fits RAB poles listed below

PS4-11-10WT
PS4-11-10D2
PS4-11-15WT
PS4-11-15D2
PS4-11-20WT
PS4-11-20D2
PS4-11-25WT

Anchor Bolt Kit - for Mason

- (4) 3/4" x **18.75"** anchor bolts each assembled with
 - (2) Hex nuts,
 - (2) Flat washers
 - (1) Lock washer
- (1) Paper anchor bolt template

Base Cover Kit - for Electrician

- (1) 2pc Steel base cover, bronze
- (4) 1/4" - 20 Black base cover screws
- (1) 4" Pole cap CAT# PCAP4 (For Use with Drilled Poles)

ABK4-07 with 30" Anchor Bolts Fits RAB poles listed below

PS4-07-20WT
PS4-07-25WT
PS4-07-25D2

Anchor Bolt Kit - for Mason

- (4) 3/4" x **30"** anchor bolts each assembled with
 - (2) Hex nuts,
 - (2) Flat washers
 - (1) Lock washer
- (1) Paper anchor bolt template

Base Cover Kit - for Electrician


- (1) 2pc Steel base cover, bronze
- (4) 1/4" - 20 Black base cover screws
- (1) 4" Pole cap CAT# PCAP4 (For Use with Drilled Poles)

Notes:

- Hand Hole Covers are attached to pole.
- RC Drilled (non Tenon) Poles come pre-drilled for 2 Area Lights at 180°.

Additional drilling can be done in the field.

Pre-Drilled
3 holes on this side
not plugged



**Pre-Drilled -
Plugs Installed**
7/16" Plug
5/8" Center Hole Plug
7/16" Plug

RAB
LIGHTING
©2015 RAB LIGHTING Inc.
Northvale, New Jersey 07647 USA
RABWEB.COM • 888 722-1000