



A family company manufacturing in the USA

www.glastender.com



TCA



Intertek

4004503

Conforms to ANSI/NSF STD 2



TCA shown in an installation setting

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Tubing Chases

TC	TCA, TCB
-----------	----------

Standard Features

- All stainless steel construction
- Tubing chase is 6" x 6" x 4" high
- Stainless steel drain pan with 1" recess and radius corners for easy cleaning, complete with drain fitting
- Removable stainless steel perforated drain pan insert
- Mounts between adjacent underbar equipment (there is no provision for leg mounting)
- Includes front rail and front skirt to match adjacent equipment
- Can be set in place after beverage lines are installed

Specifications

Drain

- 1/2" welded tailpiece. Clear vinyl drain line is connected to the tailpiece at the factory. A 1/2" by 1/2" barbed plastic elbow is provided to make the connection at the bottom of the unit.

Tubing Chase

- 6" x 6" x 4" high

Materials

- 20 gauge stainless steel


Mounting

- Must be mounted to adjacent piece of free standing underbar equipment
- No provisions for leg mounting, unit cannot be free standing

Underbar installation instructions: <https://www.glastender.com/support/documents/manuals/underbar-installation-instructions>

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Dimensional Information

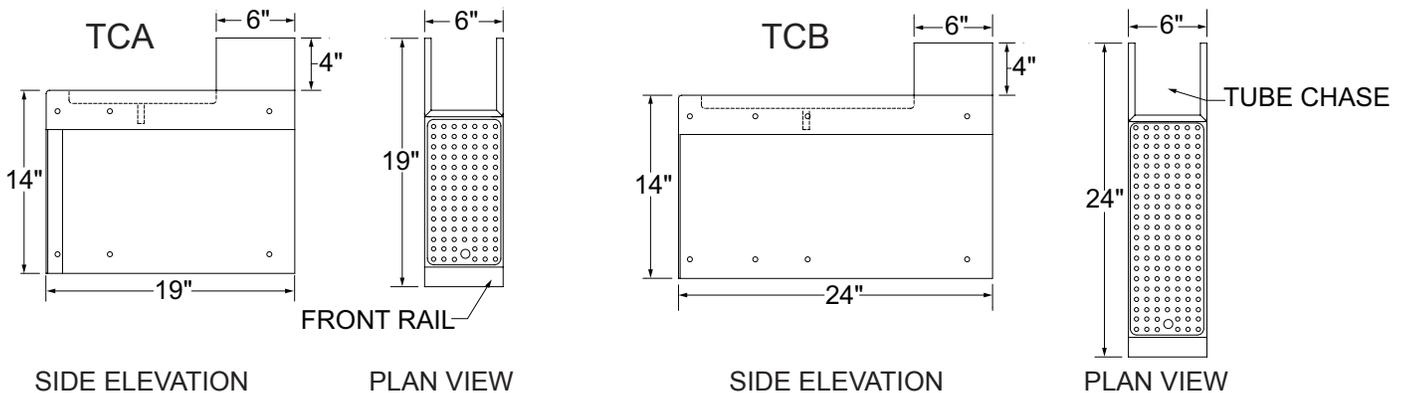

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	