



Project _____

Item # _____ Quantity _____



AireServe Mobile Frost Top Serving Cart

Item #ASFT6028

Spring USA AireServe Mobile Frost Top Serving Cart is the perfect serving solution for cold treats. Easily transform any space into a chilled serving area with the AireServe Mobile Frost Top Serving Cart's hidden frost top and NSF-certified SmartStone™ top.

Construction & Performance

Features:

- Lightweight & easy to move, 28" width fits through standard doorway
- Compact 60" footprint with hidden 45.6" frost top maximizes frost top zone
- Clean, consistent cooling without the hassle of ice
- Surface temperature range 0°- 30°F
- High performance compressor & controls discretely housed in ventilated cabinet
- Heavy-duty 5" diameter swivel heavy-duty casters with brakes are more durable & easier to push than industry-standard 4" casters
- Includes 3 storage shelves
- 23" push bar handle for easy transport
- Made in the USA of foreign and domestic parts

Standard Laminate

- Engineered to perform in high-touch applications with superior wear resistance
- Finish: Char Walnut stain

SmartStone®

- Finish: Fawn, honed, finished polished edge
- Durable, non-porous, easy to clean surface
- NSF-certified for foodservice

Electrical Requirements:

Voltage	Phase	Hz	V	Amps	Plug
110-120	1	60	110-120	12.3	NEMA 5-20P

Undermounted Frost Top (SS-FT-4822): 110-120V, 1pH, 60Hz, 1350W, 12.3A

Agency Listings:

- NSF -Certified
- UL Certified





Project _____

Item # _____ Quantity _____

Frost Top (Model #SS-FT-4822)

Spring USA's Hidden Frost Tops help keep items chilled without the use of ice packs. No need to replenish ice in the middle of service or worry about messy puddles to clean from melted ice. When in use, the surface area is cold but when turned off, the surface area is at ambient temperature and clear of any cooling equipment.




- 18-gauge, 304 stainless steel housing
- Surface temperature range 0°- 30°F
- Fully insulated housing with 2" polystyrene for efficiency and energy-savings
- Fully welded and sealed with high strength silicone sealant
- Digital thermostat
- 16-gauge, stainless steel condenser base
- 1-1/4" angle iron frame condenser housing
- Hermetically sealed compressor with 404-a refrigerant
- Thermostatic expansion valve with drier and sight glass for easy service
- Power ON/OFF switch

Internal Power Management:

6-outlet NEMA 5-20R power strip, with 3 power outlets available while the Frost Top and thermal fans are in use. 120V, 1pH, 60Hz, 2400W, 20A. Total draw must not exceed 20 amps.

Dimensions:

Area	Measurement
Frost Zone	45.6"L x 19.6"W
Cart	28"W x 60"L x 36"H

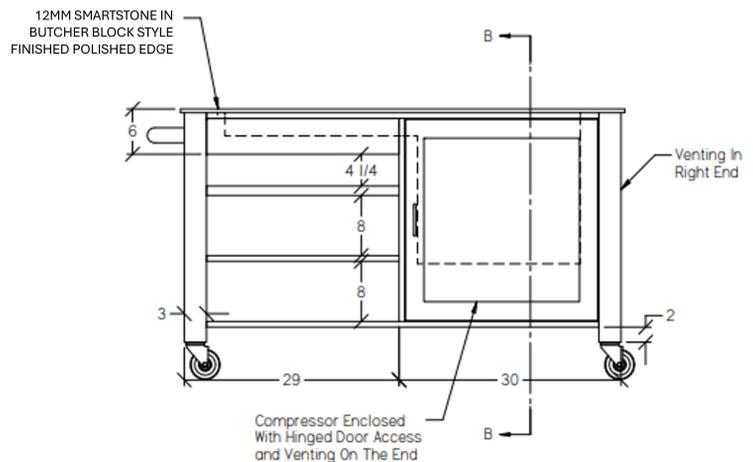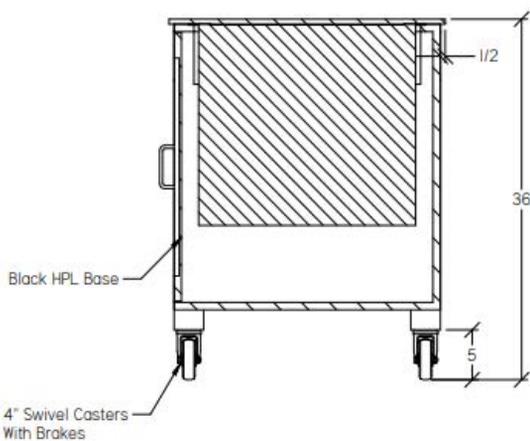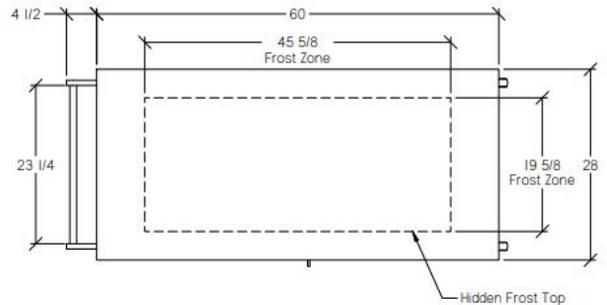

Standard Warranty:

One year, parts. See springusa.com/warranty for more information.