

# VICTORY<sup>®</sup>

## ULTRASPEC

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

### BOTTOM MOUNT GLASS DOOR DISPLAY REFRIGERATOR

## LSR23HC-1



#### EXCLUSIVE WARRANTY

- ▶ 7 Year Parts, Labor and Compressor
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)

#### CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back)
- Aluminum Interior
- LED Lighting
- High-Performance, Balanced, Bottom-Mounted Refrigeration
- Triple-Pane Glass Door
- Spring-Loaded Hinge With Stay-Open Door Feature For Easy Product Loading
- One-Piece, Snap-In Magnetic Door Gasket
- Door Lock Standard
- Five (5) Heavy-Duty Epoxy Coated Shelves
- 6" Overall Height Casters Standard
- Field Reversible Door (hinge kit not included)
- 8' Cord And Plug (see electrical data for details)

#### FEATURES

- Full Electronic Control

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

#### OPTIONS & ACCESSORIES

- |  |   |   |
|--|---|---|
| • Stainless Steel, Black Or White Interior | • Door Swing Orientation (at time of order) | • Remote Models* (6" legs only)   |
| • Custom Color Cabinet                     | • Additional Shelves                        | (refrigerant must be specified at time of order, see note on back page) |
| • Electronic Lock Models                   | • 3" Casters Or 6" Seismic Legs             |   |

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 7/1/24 Printed in the U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

BOTTOM MOUNT DISPLAY REFRIGERATOR

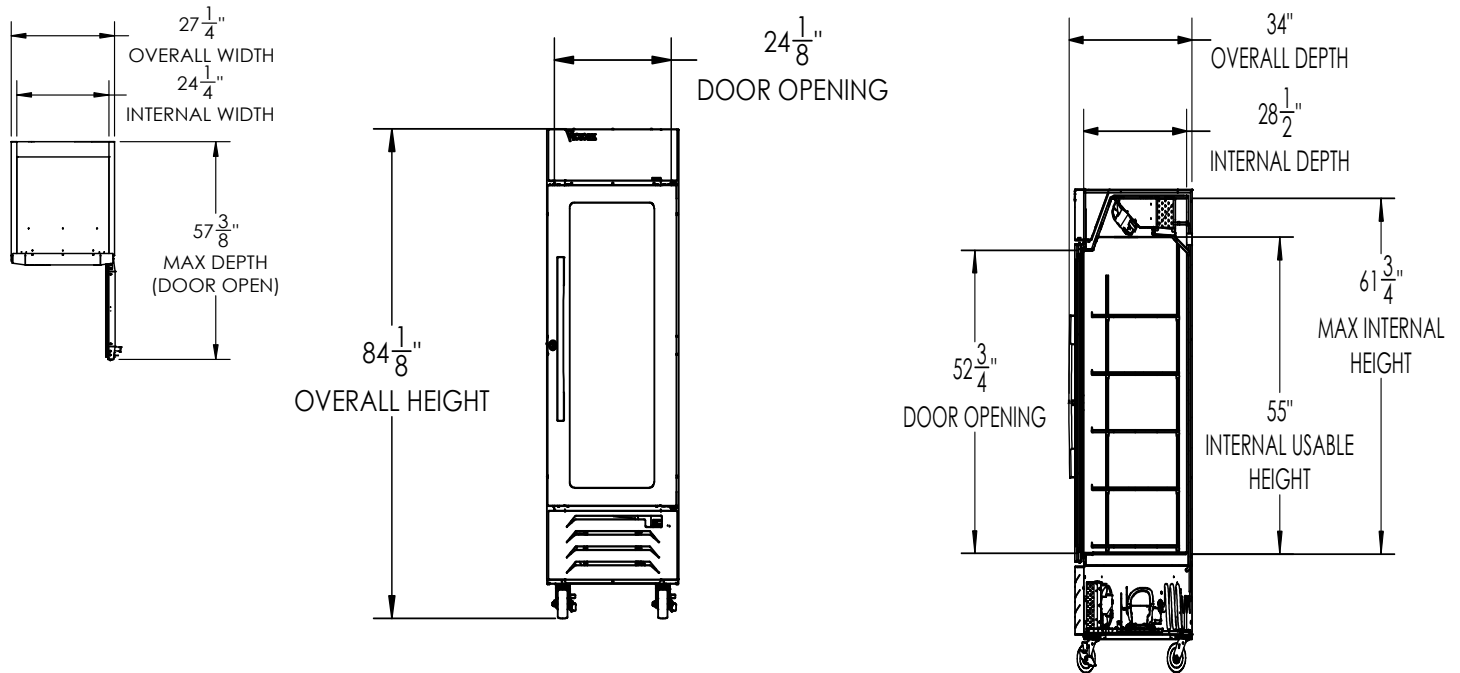

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances  $\pm 1/4"$ . Metric dimensions (MM)

12" Top, 6" Bottom, 3" Sides & 3" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	23.32	Cabinet Voltage	115/60/1	Height	85"
Width, Overall (in.)	27 1/4"	Total Amperes	2.88	Width	32"
Depth, Overall (with handle)	34"	NEMA Plug (8' cord)	5-15P	Depth	36"
Height Overall (with casters)	84 1/8"	REFRIGERATION DATA		Crated Weight	384 lbs
Depth, Doors Open 90°	57 3/8"	Condensing Unit Size, HP	1/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	24 1/8" x 52 3/4"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/5	Capacity (BTU/HR) (100°F/20°F)	1702		
		Heat Rejection (BTU/HR)	2553		
		Charge (lbs/grams/ounces)	0.1985 / 90 / 3.18		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 7/1/24 Printed in the U.S.A.