



Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000

UPT SERIES

Compact Sandwich Prep Tables with
Raised Cover/Self-Contained



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

AVAILABLE CONFIGURATIONS

48" Wide Models

Model	Model Type	Hinging
UPT4812-LR	48" Wide 12 Pan	Left/Right
UPT4812-LL	48" Wide 12 Pan	Left/Left
UPT4812--RR	48" Wide 12 Pan	Right/Right
UPT4818LR	48" Wide 18 Pan	Left/Right
UPT4818-LL	48" Wide 18 Pan	Left/Left
UPT4818-RR	48" Wide 18 Pan	Right/Right

STANDARD PRODUCT FEATURES

- High Quality Stainless Steel Exterior Top, Sides & Doors
- Durable, Corrosion Resistant Anodized Aluminum Interior
- Provides NSF Standard 7 Performance, Even With 6" Deep Pans
- Standard Work Height 34 $\frac{3}{8}$ " on 4" casters
- Environmentally Friendly R-290 Refrigerant
- Top Cut-Outs Accommodate Sixth Size Pans (divider bars and 4" deep plastic sixth size pans provided)
- Reinforced Pan Ledge (holds pans securely level)
- Removable Stainless Steel Insulated Pan Cover & Pivoting Lid
- Reversible, Full Length White Nylon Cutting Board
- Self-Closing Stainless Steel Doors with Stay-Open Feature at 105 Degrees
- Electronic Control
- Two (2) Powder Coated Steel Shelves Per Door, Mounted on Adjustable Pilasters
- Set of Four (4) 4" Casters
- Magnetic Snap-In EZ-Clean™ Door Gasket(s)

ACCESSORIES & OPTIONS (*field installed)

- CK20 (four 6" (15.2 cm) high casters for 48" models)
- CK24 (four 3 $\frac{1}{2}$ " (8.9 cm) high casters for 48" models)
- CK26 (four 2 $\frac{3}{4}$ " (6.9 cm) high casters for 48" models)
- LK4 (four 6" (15.24 cm) high legs for 48" models)
- SHELF48-UPPER (upper shelf for 48" models)
- SHELF48-LOWER (lower shelf for 48" models)
- Optional accessory kits shipped separately for field installation

Factory Installed Options

- Stainless Steel Finished Back (model numbers will have '-SB' suffix)

- GUARANTEED FOR LIFE WORKFLOW DOOR HANDLES

Approved by _____ Date _____ Approved by _____ Date _____




UPT SERIES

Compact Sandwich Prep Tables with
Raised Cover/Self -Contained



MODEL:
UPT4812-LR

CAD and/or Revit Files Available


<https://traulsen.klccad.com/>

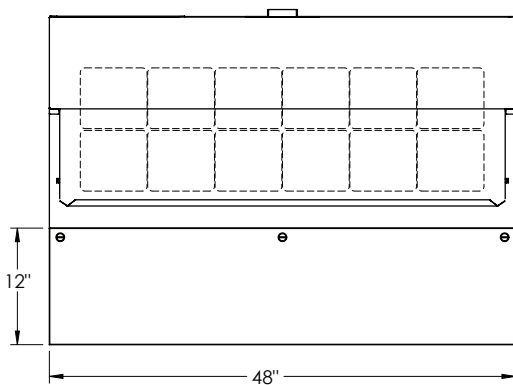

TOP VIEW

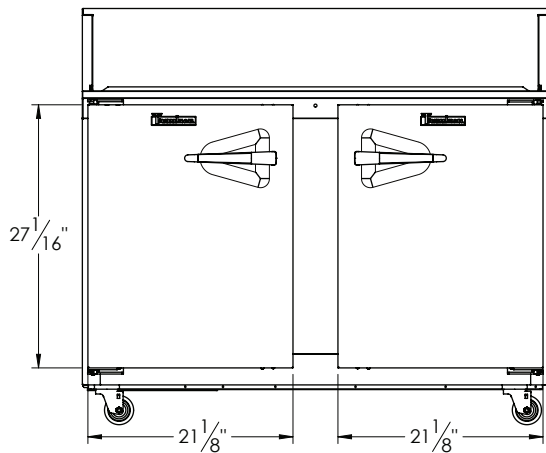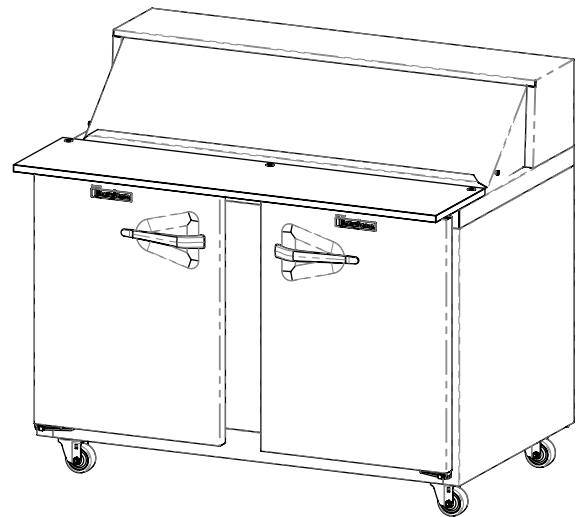

ELEVATION

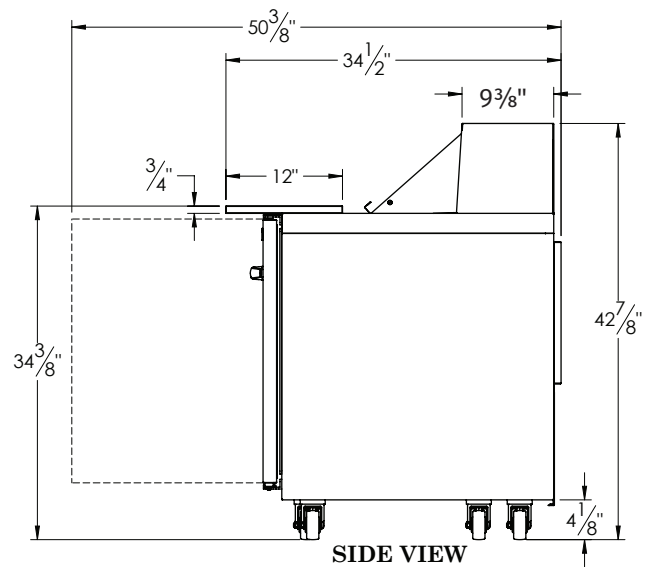

SIDE VIEW




 **CAD and/or Revit Files Available**

Figure 1

Figure 2

A technical line drawing of a mobile food service unit. The unit has a rectangular body with a sloped top panel that can be lifted, as indicated by dashed lines and hinges. The front of the unit features two doors, each equipped with a large, ergonomic handle. The unit is mounted on four casters for mobility. The drawing is a black and white line art, showing the unit from a three-quarter perspective.

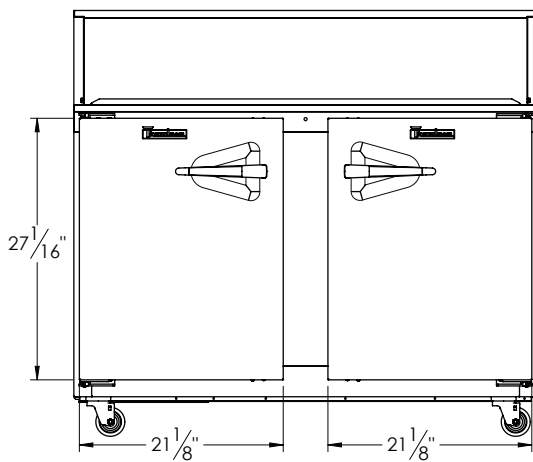

Side view technical drawing of the machine. Dimensions shown include a total width of $50\frac{3}{8}"$, an upper width of $34\frac{1}{2}"$, an upper offset of $9\frac{5}{8}"$, a lower width of $34\frac{3}{8}"$, a total height of $44\frac{1}{8}"$, a front offset of $3"$, another front offset of $8"$, and a base height of $4\frac{1}{8}"$. The drawing shows a side profile with a sloped top surface and a base with casters.

UPT SERIES COMPACT PREP TABLES



UPT SERIES

Compact Sandwich Prep Tables with
Raised Cover/Self -Contained

MODELS:

UPT4812-LR, UPT4812-LL, UPT4812-RR, UPT4818-LR, UPT4818-LL,
UPT4818-RR

EQUIPMENT SPECIFICATIONS

CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, sides, pan cover lid and doors are constructed of stainless steel. Cabinet interior and door liners are constructed of anodized aluminum. The exterior cabinet back at the bottom are constructed of galvanized steel.

Doors self close at less than 90 degrees and also includes a stay open feature at 105 degrees. Gasket profile and material simplify cleaning and increase overall gasket life. Both the cabinet and doors are insulated with an average of 2" thick high density non-CFC, foamed in place polyurethane. A ¾" thick, full-length, reversible white nylon cutting board is supplied standard.

PANS & COVER

Each model is supplied standard with its full compliment of 4" deep plastic 1/6 size pans and stainless steel pan dividers. The lid is constructed of stainless steel, and is easily removable for cleaning.

REFRIGERATION SYSTEM

A balanced, rear mounted, front breathing, self-contained refrigeration system using environmentally friendly R-290 refrigerant is provided. It features a capillary tube metering device, air cooled hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' cord and plug is provided. Standard operating temperature of the refrigerated base is 34° to 38°F (1.1° to 3.3°C).

CONTROLLER

An electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

INTERIOR

Standard interior arrangements include two (2) powder coated wire shelves per door, mounted on pilasters. These are adjustable in ½" (1.27 cm) increments, allowing for a minimum of 1½" (3.81 cm) spacing between shelves.

WARRANTY

Both a six year parts and labor warranty and a seven year compressor parts warranty (self-contained models) are provided standard.

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug 

MODELS	UPT4812		UPT4818	
DIMENSIONAL DATA				
Net Capacity cu. ft.	14 (396.4 l)			
# of 1/6 Size Pan Top	12		18	
Length - overall in.	48 (121.9 cm)			
Depth - overall in. ¹	34½ (87.6 cm)			
Depth - door open 90° in.	50¾ (128 cm)			
Clear door width in.	21⅞ (53.7 cm)			
Clear door height in.	27⅞ (68.7 cm)			
Depth - cutting board in.	12 (30.5 cm)		8 (20.3 cm)	
Height - overall on 4" casters	42⅞ (108.9 cm)		44⅞ (112.1 cm)	
Work Height on 4" casters	34¾ (87.3 cm)			
# of Doors	2			
# of Shelves	4			
Total Shelf area sq. ft	10.3 (3.1 m)			
ELECTRICAL DATA (NEMA 5-15P attached)				
Voltage	115/60/1			
Full Load Amps	7.2			
REFRIGERATION DATA				
Refrigerant	R-290			
Refrigerant Amount oz.	5 (142 g)			
BTU/HR² H.P.	1680 1/5 HP			
SHIPPING DATA				
Length - crated in.	69 (175 cm)			
Width - crated in.	42 (107 cm)			
Height - crated in.	56 (142 cm)			
Volume - crated cu. ft.	77 (2180 l)			
Weight - crated lbs.	361 (164 kg)			

NOTES:

1. Overall depth figure includes standard cutting board.
2. Based on a 90°F ambient and 20°F evaporator

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.