

- FR6
 - FR8
- 74"L x 43-1/4"D x 84-3/4"H

93"L x 43-1/4"D x 84-3/4"H

Included

- 8" X 13" Buckets
- Digital fahrenheit thermometer
- One year parts & labor warranty
- Rail system for shims
- Shelving display converts from level to angled
- Top light (LED 4000K)



FR6

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors)
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors)
REAR EXTERIOR COLOR	• Powder coated Silversan Black	
BASE SUPPORT	• Rail system for shims	
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/ glass
FLORAL DISPLAY	¹ • 8" X 13" Buckets	
SHELVING	• (2) Levels of convertible shelving	
TOP LIGHT	• Top light (LED 4000K)	
ELECTRICAL CONNECTION	• Electrical leads	
REFRIGERATION	² • Remote DX refrigeration	¹ • Remote DX w/thermostat, solenoid & TXV
SENSOR	• None	• CPC discharge air sensor (remote)
MISCELLANEOUS		• Second year parts & labor warranty


Std Notes: 1 - FR6 = (12), FR8 = (16)
2 - Read important notes for remote options

Option Notes: 1 - Read important notes for remote options


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Floral products	40

PLAN VIEW

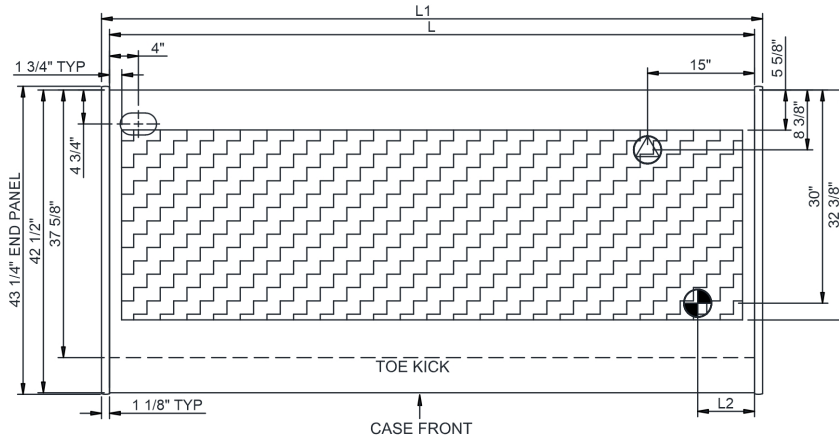

SIDE VIEW

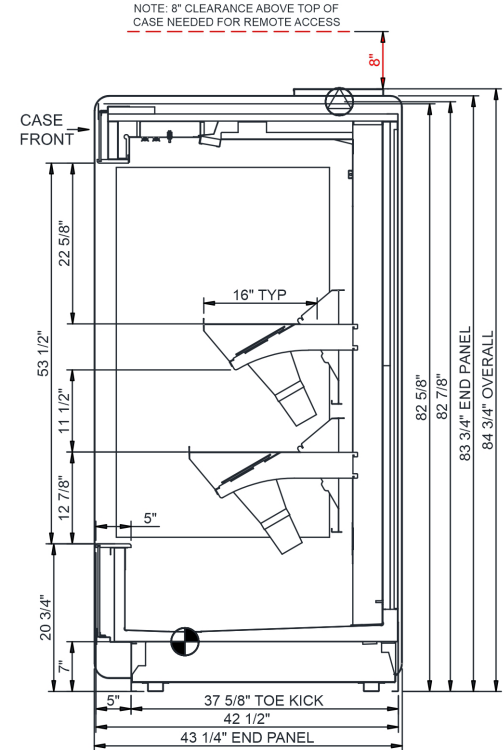

NOTE: ALL DIMENSIONS APPROXIMATE

⊕ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6\"

⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4\"

⊕ REFRIGERATION LINE CONNECTION.
⊕ REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⊕ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications														
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH
FR6	71.75	74.00	8.00	Remote (DX)	Circuit #1	110-120	1	60	2.14	136	2+G	Leads Multiple	26.00	10368
FR8	90.75	93.00	8.00	Remote (DX)	Circuit #1	110-120	1	60	2.96	123	2+G	Leads Single	26.00	14170
														9600
														13120
														N/A
														N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models ETL Listed to UL 471
ETL Listed to CAN/CSA 22.2 No. 120
ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) Top electrical access.
- 4) Keep unit at least 15' from exterior doors, 10' from overhead HVAC vents, 5' from exterior windows.
- 5) Units must be shimmed during installation to ensure the unit is level and plumb.
- 6) Performance issues (product temperatures, water on floor, etc) caused by adverse conditions are not covered by warranty.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.