

N8600-FWP FlexiWell

Individually Controlled Hot, Cold and Freeze
Combination Pan

N8600-FWP: Individually controlled Hot, Cold and Freeze Combination Pan

Models

- N8618-FWP 18" hot, cold & freeze combination pan drop-in
- N8633-FWP 33" hot, cold & freeze combination pan drop-in
- N8648-FWP 48" hot, cold & freeze combination pan drop-in
- N8663-FWP 63" hot, cold & freeze combination pan drop-in
- N8678-FWP 78" hot, cold & freeze combination pan drop-in
- N8693-FWP 93" hot, cold & freeze combination pan drop-in



N8663-FWP

Standard Features

- NSF-4 and NSF-7 certified for hot and cold operation
- Wells operate independently for hot/cold/freeze operations in any combination
- Flush mount pans standard
- Thermostatic temperature controls
- Dry operation only - No water required
- Stainless steel louver(s) provided
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Push in flange gasket is standard
- Environmentally friendly R290 refrigerant
- 2-year parts and labor warranty, standard parts warranty

Options & Accessories

- Adapter bars

Specifications

Top: Top is constructed of one-piece stainless steel

Interior: Interior liner is constructed of aluminum with flush mount flange for heating or cooling to accommodate up to 6" (15cm) deep 12"x20" pans, supplied by others.

Exterior: Exterior body is constructed of galvanized steel with High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout.

Refrigeration: Condensing unit is suspended on a galvanized steel frame. Environmentally friendly R290 refrigerant is utilized. Temperature controlled by thermostat located in remote control panel.

Operation: Remote control panel contains 3-way Hot/Cold/Off power switch and thermostat for heated, cold and freeze operation.


Electrical: All units must be hard wired to a single point connection at installation.


Louver Panel dimensions: 25"x13"

Louver Panel Cutout dimensions: 23.50"x12"



N8600-FWP: Individually controlled Hot, Cold and Freeze Combination Pan

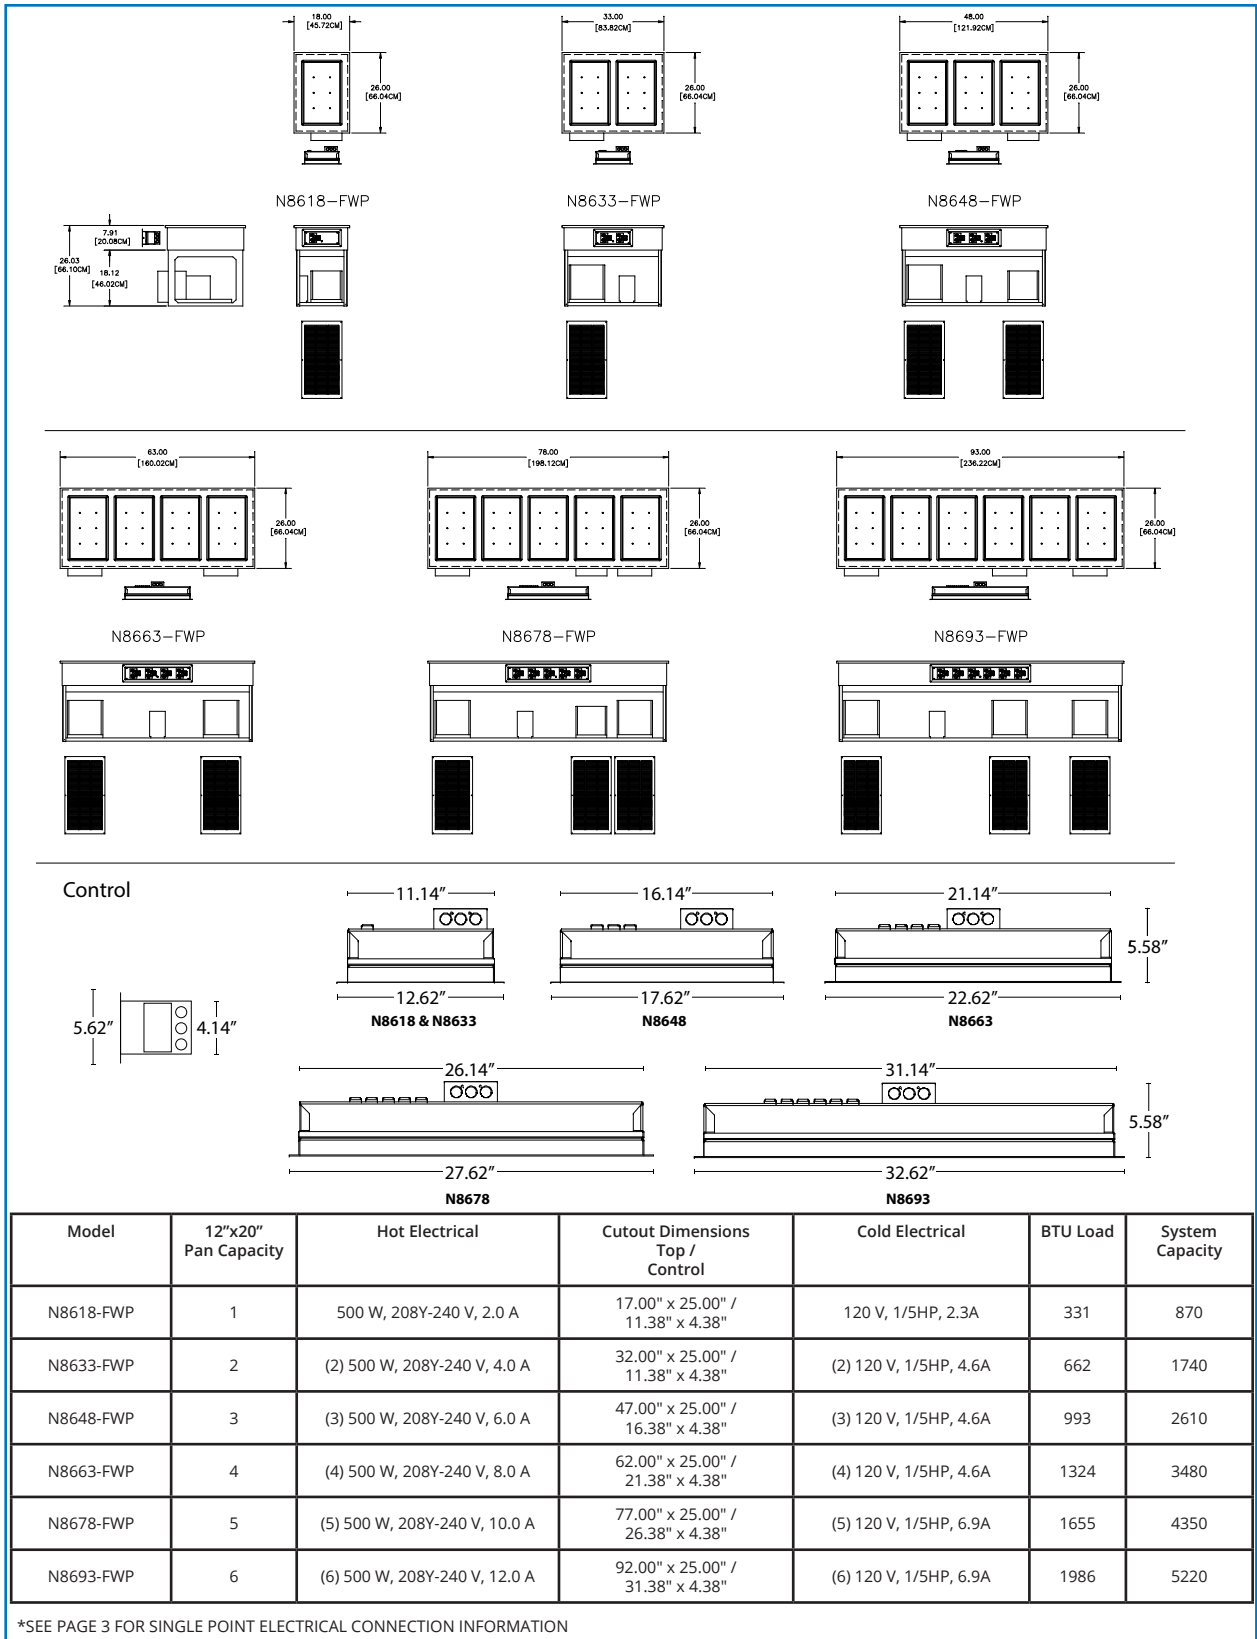

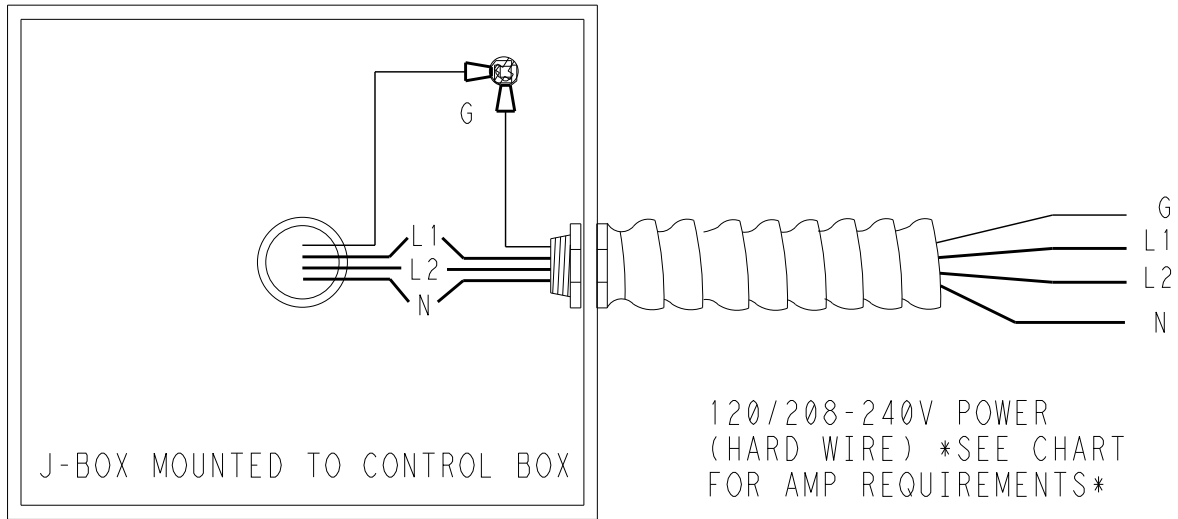

Model	12"x20" Pan Capacity	V/Hz/Ph	Amps (max)	Ship Weight
N8618-FWP	1 well	120/208-240/60/1	2.3	300
N8633-FWP	2 well	120/208-240/60/1	4.6	380
N8648-FWP	3 well	120/208-240/60/1	6.0	460
N8663-FWP	4 well	120/208-240/60/1	8.0	550
N8678-FWP	5 well	120/208-240/60/1	10.0	660
N8693-FWP	6 well	120/208-240/60/1	12.0	720

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Page intentionally left blank