



A family company manufacturing in the USA

www.glastender.com

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Undercounter Mount Rinsers Faucet

UMRF

Standard Features

- All 18 gauge stainless steel construction
- Pan includes radius interior corners for easy cleaning
- Total welded construction with integrated C-channel sides for incredible rigidity
- Installation kit for plumbing 1/2" tailpiece drain - includes 10' of vinyl drain tube, (3) ty wraps, (1) elbow, (1) elbow to drain-line adaptor, (4) #10 x 1/2 screws
- Rear deck area with pre-punched screw holes for mounting to underside of bar top

Specifications

Drain

- 1/2" tailpiece

Materials


- 18 gauge stainless steel

Faucet

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute
- NSF/ANSI 372 listed for low lead compliance

Rinsers Faucet Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

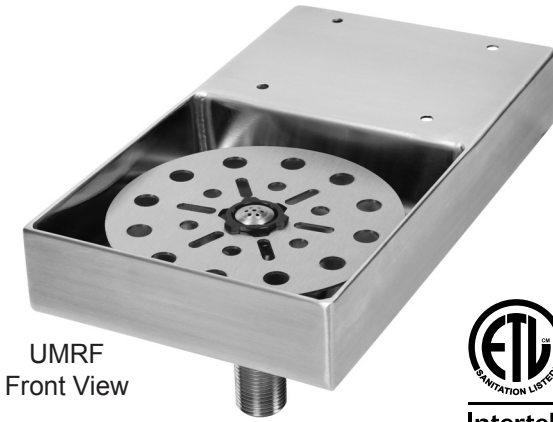


UMRF
Front View



Intertek

4004503

Conforms to ANSI/NSF STD 2

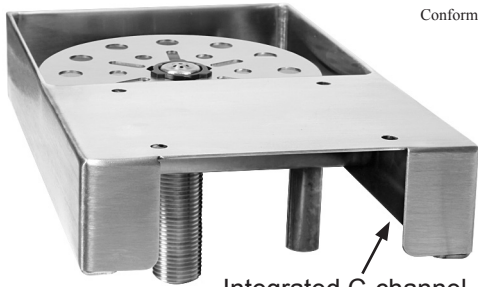


UMRF
Back View


Integrated C-channel
Stiffener

03012383 Rinsers Faucet Assembly	 Intertek 4004503 Conforms to NSF/ANSI STD 372
--	--


Dimensional Information



TOP VIEW



FRONT VIEW

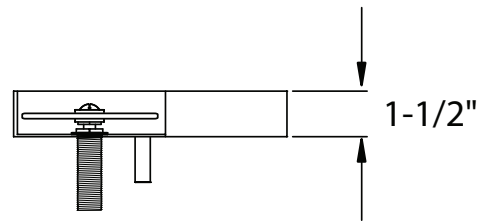

RIGHT SIDE VIEW

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.