

- HMO2653R 27"L x 34-1/2"D x 53-1/4"H
- HMO3953R 39"L x 34-1/2"D x 53-1/4"H
- HMO5153R 51"L x 34-1/2"D x 53-1/4"H
- HMO6353R 62-7/8"L x 34-1/2"D x 53-1/4"H

Included

- Breeze self-contained refrigeration
- Clear glass shelves, lighted (LED 3500K)
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refrig. only)
- Flat front panel
- LED 3500K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Shelving removable and adjustable on 1" centers
- Upper & lower rear areas white
- Warmest average product temperature of 40°F or less



HMO2653R

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Powder coated Designer White • Stainless steel
REAR EXTERIOR COLOR	• Powder coated Designer White	• Powder coated Silversan Black • Stainless steel (must choose stainless exterior)
BASE SUPPORT	• Levelers	• 6"H legs (self-cont.) • Casters (self-cont.)
END PANELS	• Full w/stainless steel mirror interior	• Cutaway w/glass
PRICE TAG MOLDING	• None	• 1" Price tag molding (matches interior color)
REAR DOORS	• None (solid back panel)	¹ • Clear glass rear sliding doors w/o lock ² • Solid rear swinging door w/o lock (HMO2653)
ELECTRICAL CONNECTION	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.) • Electrical leads (remote)
REFRIGERATION	• Breeze self-contained refrigeration	³ • Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		• Rear door lock • Second year parts & labor warranty (excludes compressor)
ACCESSORIES		• Clean Sweep® coil cleaner (self-cont.) • Night curtain, retractable, non-locking • Removable wire security cover, locking



Option Notes: 1 - HMO3953R; HMO5153R; HMO6353R;
2 - HMO2653R;
3 - Read important notes for remote options

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

SIDE VIEW

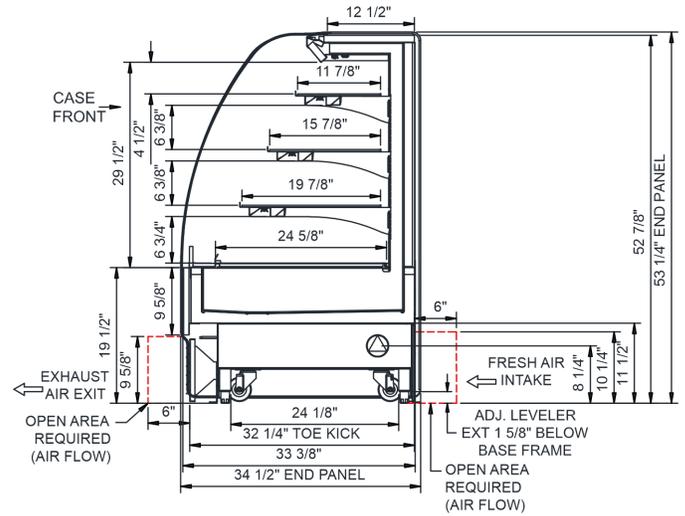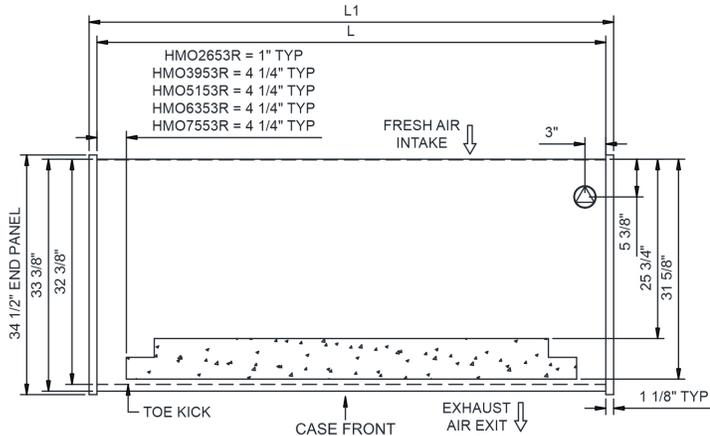

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt	
				Remote (DX)	Self-Contained (R290)											
HMO2653R	24.75	27.00	.00	Remote (DX)	Circuit #1	110-120	1	60	1.11	116	2+G	Leads Multiple	24.00	2566	2376	650
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.12	1,601	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO3953R	36.75	39.00	.00	Remote (DX)	Circuit #1	110-120	1	60	1.20	131	2+G	Leads Multiple	24.00	3758	3480	800
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.17	1,607	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO5153R	48.75	51.00	.00	Remote (DX)	Circuit #1	110-120	1	60	2.03	210	2+G	Leads Multiple	24.00	4730	4380	900
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.66	1,633	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO6353R	60.63	62.88	.00	Remote (DX)	Circuit #1	110-120	1	60	1.90	107	2+G	Leads Multiple	20.00	5702	5280	1,100
				Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,884	2+G	6-20P or L6-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plum.
- 4) 35" Minimum door entry clearance required (without shipping skid).
- 5) Compressor air rear intake, front discharge. Toe kick cannot be blocked.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.