



Item: _____

Quantity: _____

Project: _____

Electric Thermostatic Griddle

Electric Series

Models: RTGE-12 RTGE-24 RTGE-36 RTGE-48 RTGE-60 RTGE-72



RTGE-36

Voltage: 208V 240V
Phase: 1 Phase 3 Phase

Standard Features

- 21" cooking depth
- 11" high, Low Profile
- Compact heavy gauge chassis for long life
- Stainless steel sides, control panel and ledge for easy cleaning
- Double wall panels for cooler sides
- Independent heating elements every 12", 3.4 KW each
- Energy saving thermostatic controls every 12" (200°-500°F)
- 4" wide S/S grease trough with large drain opening for easy cleaning
- Large 1 1/2 gallon capacity S/S grease can
- 3/4" thick polished steel griddle plate
- 4" high adjustable heavy duty legs included


Options and Accessories

- Grooved griddle (specify width: _____")
- Chrome griddle plate
- Stainless Steel Equipment Stand
 - Knock Down All Welded
 - Size
 - 12" 24" 30" 36" 48" 60" 72"
 - 5" swivel casters (set of four - 2 locking)
 - 5" swivel casters (set of six - 3 locking) (60" and 72" stands)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

Electric Thermostatic Griddle

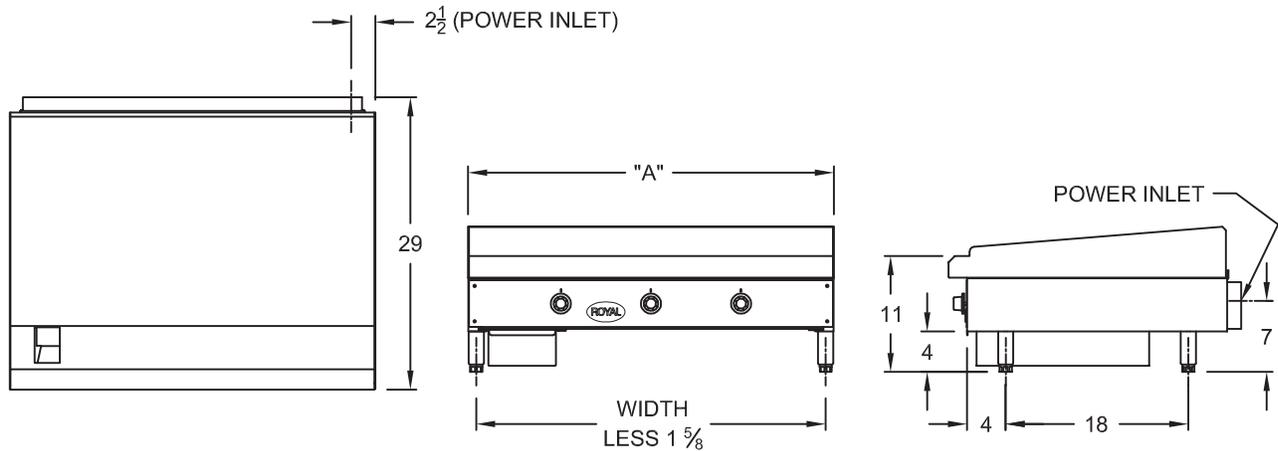

Model	Width (A)	Total KW	Voltage	MAX AMPS				Ship Wt.
				1 Phase		3 Phase		
				Inlet 1	Inlet 2	Inlet 1	Inlet 2	
RTGE-12	12"	3.4	208	17				140
			240	15				
RTGE-24	24"	6.8	208	33		16		210
			240	29		25		
RTGE-36	36"	10.2	208	50		29		290
			240	43		26		
RTGE-48	48"	13.2	208	66		39		370
			240	57		31		
RTGE-60	60"	17	208	50	50	29	29	460
			240	43	43	25	25	
RTGE-72	72"	20.4	208	50	50	29	29	540
			240	43	43	25	25	

60" and 72" units have two electrical inlets.

To be installed only in noncombustible surroundings. See installation instructions.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com