

CAN STORAGE RACKS

FULL AND HALF SIZE UNITS

KELMAX by
SPG



ITEM # _____ MODEL # _____ QTY: ____
PROJECT: _____
OPTIONS: ☐ YES _____ ☐ NO _____

Standard Features & Benefits

- ◆ Constructed of heavy duty extruded type 6063 aluminum alloy
- ◆ Unit is fully welded for greater strength
- ◆ Ships set up and ready to use
- ◆ FIFO — First In, First Out — Load and empty from front
- ◆ Half size unit doubles as work table to maximize your space
- ◆ Available with aluminum top, 304 Series stainless steel top or 5/8" poly top
- ◆ 5" Poly U expandable stem casters, 2 swivel with brakes and 2 rigid
- ◆ Mobile units (M): 5" polyurethane plate casters, 2 swivel with brakes and 2 rigid
- ◆ Lifetime guarantee against rust

Half Size Units

| Model No. | Capacity of No. 10 Cans | Type of Top | D x L x H | | Weight | |
|------------|----------------------------|-----------------|--------------|------------------|--------|-------|
| | | | (in.) | (mm.) | (lbs.) | (kg.) |
| 35" Height | | | | | | |
| 4H1602 | 54 | None | 35 x 28 x 35 | 889 x 711 x 889 | 47 | 21 |
| 4H1603 | 54 | Aluminum | 35 x 28 x 35 | 889 x 711 x 889 | 54 | 24 |
| 4H1604 | 54 | Poly Top | 35 x 28 x 35 | 889 x 711 x 889 | 65 | 29 |
| 4H1606 | 54 | Stainless Steel | 35 x 28 x 35 | 889 x 711 x 889 | 61 | 27 |
| 42" Height | | | | | | |
| 4H1608 | 72 | None | 35 x 28 x 42 | 889 x 711 x 1067 | 58 | 26 |
| 4H1609 | 72 | Aluminum | 35 x 28 x 42 | 889 x 711 x 1067 | 60 | 27 |
| 4H1610 | 72 | Poly Top | 35 x 28 x 42 | 889 x 711 x 1067 | 72 | 32 |
| 4H1613 | 72 | Stainless Steel | 35 x 28 x 42 | 889 x 711 x 1067 | 67 | 30 |

For SPG's complete product menu,
visit www.spgusa.com or call 877.503.4SPG (4774)

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP

CAN STORAGE RACKS

SPECIFICATIONS

CONSTRUCTION:

Constructed of Heavy-Duty extruded Type 6063 aluminum alloy. Unit is fully welded.

UPRIGHTS & CROSS BRACES:

Uprights consist of 1 1/2" square aluminum tubing (.063" thick) and are fully welded to horizontal 1" square tubing (.063" thick) to support the can slides.

CAN SLIDES:

Consist of extruded angles 1" X 1 1/2" X .078" thick and extruded T-Bar 3" x .078" thick. Can slides and T-Bar are welded to the frame. Spacing for slides is 7 3/8" on center. The back of each slide is set 1" higher to allow the cans to roll forward.

CASTERS:


5" polyurethane plate casters, two rigid and two swivel with brakes.

TOPS:

Poly tops are equipped with 5/8" polyethylene material held in place by eight (8) tabs welded to the unit (CSR-54, CSR-72 Series). Aluminum tops are fitted with a .090" thick aluminum sheet with lips turned down. Stainless Steel tops are fitted with 16-gauge Stainless Steel sheet with 1" lips turned down, all corners welded and polished.

Full Size Units

| Model No. | Capacity of No. 10 Cans | D x L x H | | Weight | |
|------------------------------------------|----------------------------|--------------|--------------------|--------|-------|
| | | (in.) | (mm.) | (lbs.) | (kg.) |
| Full Size Unit- Holds 6 Cans Per Opening | | | | | |
| 4H1580 | 162 | 35 x 25 x 71 | 889 x 635 x 1803 | 60 | 27 |
| 4H1593 | 216 | 35 x 37 x 71 | 889 x 940 x 1803 | 88 | 40 |
| Full Size - Mobile | | | | | |
| 4H1582 | 162 | 35 x 25 x 71 | 889 x 635 x 1803 | 60 | 27 |
| 4H1596 | 216 | 35 x 37 x 71 | 889 x 940 x 1803 | 88 | 40 |
| Full Size Unit with Adjustable Feet | | | | | |
| 4H1581 | 162 | 35 x 25 x 71 | 889 x 635 x 1803 | 60 | 27 |
| 4H1595 | 216 | 35 x 37 x 71 | 889 x 940 x 1803 | 88 | 40 |
| FIFO Can Rack | | | | | |
| 4H1579 | 156 | 42 x 28 x 80 | 1067 x 1067 x 2083 | 200 | 91 |
| Economy Can Rack | | | | | |
| 4H1616 | 162 | 35 x 25 x 71 | 889 x 635 x 1803 | 51 | 23 |

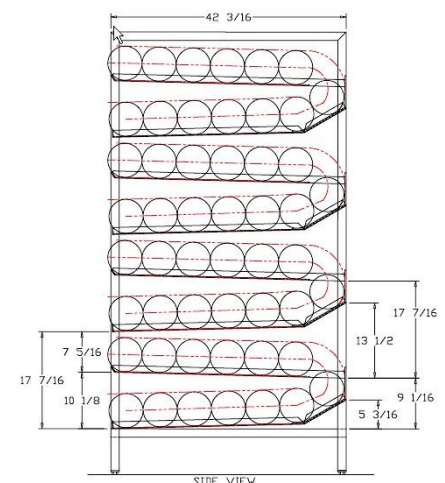

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke

SPG International, LLC
11230 Harland Drive NE
Covington, GA 30014
877-503-4SPG (4774)

www.spgusa.com

The best names in the business
all have one thing in common.

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP