

WORKTOP FREEZER (0°F)

Model: SWF60NBS-FB-D
 Natural Refrigerant R-290 Model

60" Worktop Freezer with Drawers
 and 5½" Backsplash - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Drawer locks
Stainless steel back	Special electrical requirements (consult factory)
Overshelves (single or double)	Expansion valve system

Consult factory for other model configurations, options and accessories.



Project Name: _____

Model Specified: _____

Location: _____

Item No: _____ **Quantity:** _____

AIA #: _____ **SIS #:** _____

Standard Model Features

- ### REFRIGERATION SYSTEM
- Performance rated refrigeration system
 - Natural, environmentally safe, high efficiency R-290 refrigerant¹
 - Automatic, hot gas condensate evaporator
 - Non-corrosive, plasticized fin evaporator coil
 - Easily serviceable, back mounted compressor

- ### CABINET ARCHITECTURE
- 2" non-CFC polyurethane foam insulation
 - Smooth, polished chrome drawer handles
 - Stainless steel roll out drawers
 - Magnetic snap in Santoprene™ drawer gaskets
 - Completely enclosed, vented and removable case back
 - 3 ¾" casters

- ### MODEL FEATURES
- Electronic control, automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

APPROVAL: _____

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	17.0 (481 l)
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including handles & bumpers)	32 ³ / ₁₆ (818 mm)
Height, Overall (inches) (including 3 ³ / ₄ " casters)	39 ¹ / ₂ (1003 mm)
Number of Drawers (two tier)	4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	¹ / ₂
R-290 Refrigerant Charge (oz)	4.06
Capacity (BTU per hour)*	1980

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	6.3 (3.1)
Defrost Amps (International)	4.4 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	410 (190 kg)
Height - Crated (inches)	47 ¹ / ₂ (1207 mm)
Width - Crated (inches)	68 (1727 mm)
Depth - Crated (inches)	37 ¹ / ₄ (946 mm)

DRAWER PAN CONFIGURATIONS


Two Tier: (1) 12 x 20 x 6 pan per drawer

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

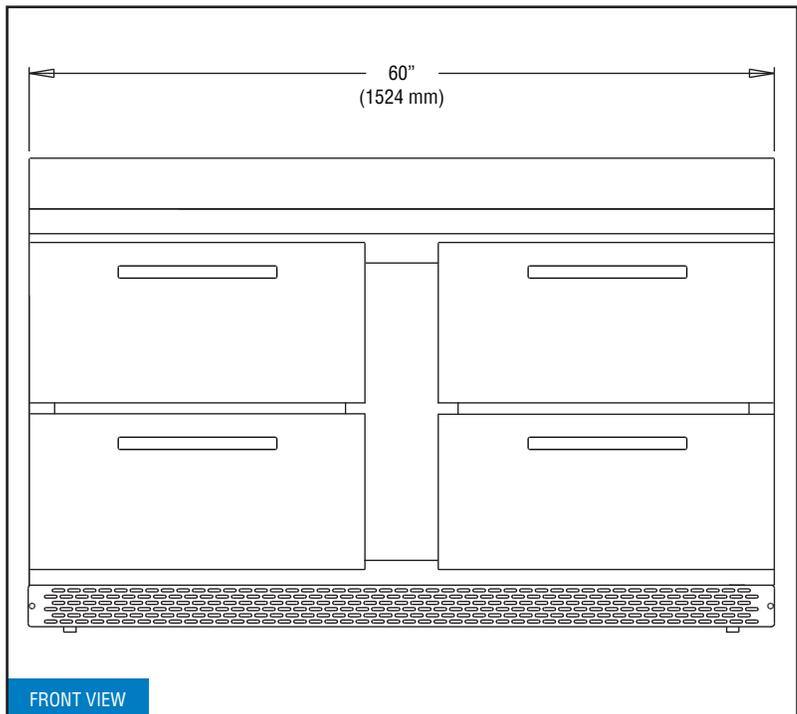

FRONT VIEW

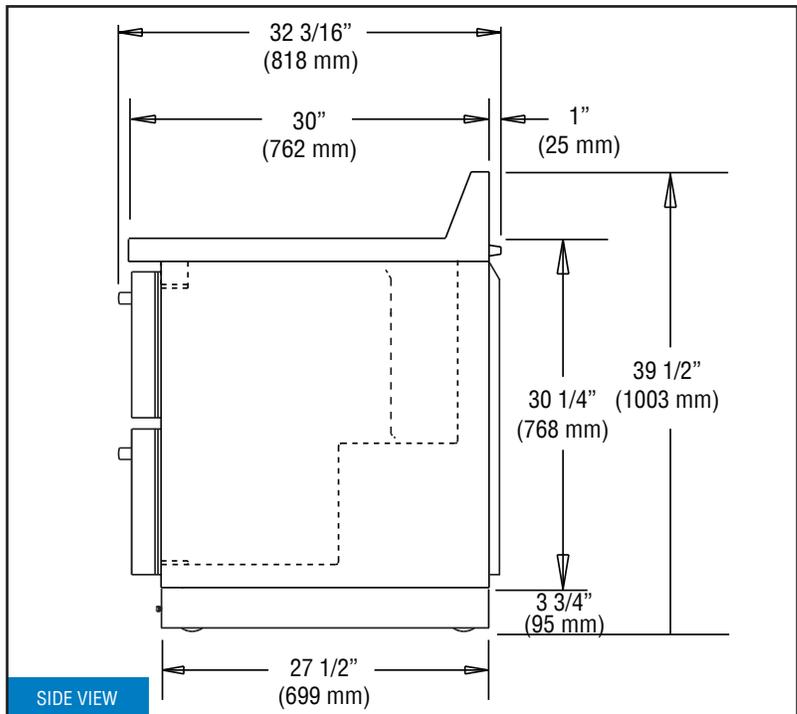

SIDE VIEW

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 12/3/25