

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville Wisconsin 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: Geninfo@Federalind.com Website: Federalind.com

Project Name:	AIA#
Item #:	
Model #: Qty:	SIS#
Approval:	

DIMENSIONS

36 x 33 x 50.7 (in)

914 x 838 x 1288 (mm) 48 x 33 x 50.7 (in)

1219 x 838 x 1288 (mm) 60 x 33 x 50.7 (in)

1524 x 838 x 1288 (mm)

Italian Glass Refrigerated Self-Serve 51" H Display Case (Drop-In)

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



STA	NDA	ARD	FE/	NTU	RES

Model Features

MODEL

☐ ITRSS3634

☐ITRSS4834

☐ ITRSS6034

- Stainless steel interior
- All tempered thermo-pane glass construction
- Removable sliding glass rear doors

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate evaporator provided for a totally self-contained system
- Condensate pump standard on remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Proper ventilation of counter is required for
- Rear air intake and discharge
- Energy saving Night Curtain
- R290 Refrigerant

Shelving

- Tempered glass shelves
- Adjustable up and down and can be tilted in two positions (0°/5° angle)
- Three tiers of shelves

Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7,Type I conditions
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- ☐ Stainless Steel Exterior
- ☐ Condensate Pump (SC Models Only)
- ☐ Condensate Pan (Remote Models)
- Cord & Plug (SC Models Only)
- ☐ Stainless Steel Shelving
- Reflective End GlassReflective Glass Rear Sliding Door
- ☐ Front Air Intake & Discharge
- ☐ Remote Condensing Unit (R449a Refrigerant, EEV Included)
- ☐ Joining Kit for Continuous Line Ups













Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs. AIA#

Italian Glass Refrigerated Self-Serve Merchandiser (Drop-In)

SIS#


Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone Intended product to be displayed Avg prod temp °F/°C

All Packaged refrigerated products 38°F/(3.3°C)

DIMENSION: xx"/(mm)

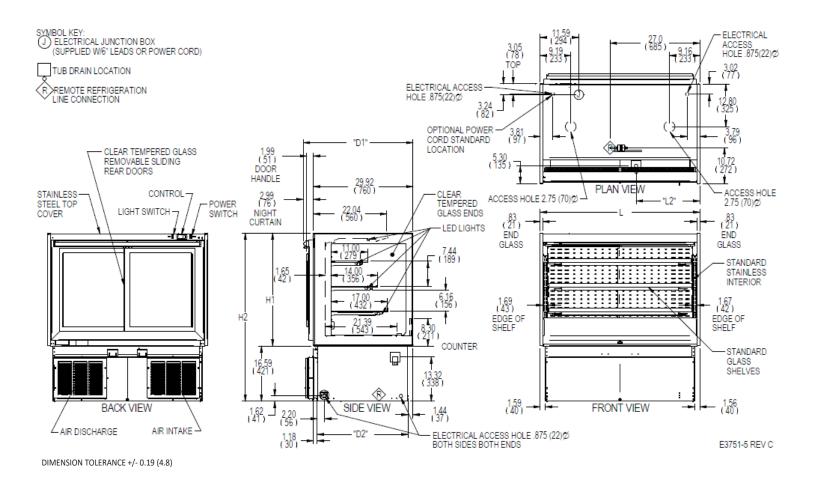

															SELF CONTAINED						REMOTE				
	DIMENSION TUB DRAIN COUNTER CUT OUT SHELV					VING		DICDLAY	INTERIOR	PERMANENT CONNECT		OPTIONAL NEMA		SHIP		PERMANENT CONNECT				SHIP					
MODEL	L	D1	D2	H1	H2	L2	L	D	#OF	DT [M Di	B L	AREA	VOLUME	2-V	VIRE + GROUND	CORD & PLUG	REFRIGERANT	CONDENSATE	WEIGHT	2-W	RE + GROUND	REFRIGERANT	CONDENSAT	WEIGHT
IVIODEL	in	in	in	in	in	in	in	in	TIERS	in	in in	in	SQIN	CUFT		120/60/1	2-WIRE +	REPRIGERANT	REMOVAL	LBS		120/60/1	REFRIGERANT	E REMOVAL	LBS
	mm	mm	mm	mm	mm	mm	mm	mm	HERS	mm n	nm mr	m mm	SQIN	COFI	AMPS	MAX FUSE SIZE	120/60/1			KILO	AMPS	MAX FUSE SIZE			KILO
ITRSS363	36.00	33.00	27.30	34.00	50.70	17.63	33.4	27.70	2	11	14 17	7 30.88	1980 SQ	10.5 CU	12.4	20	NEMA 5-20	R290	CONDENSATE	575 LBS	2.2	15	R449a	CONDENSAT	540 LBS
111133303	914	838	693	864	1288	448	848	704	3	279 3	56 43	2 784	IN	FT	12.4	20	NEIVIA 5-20	K290	PAN	261 KILO	3.3	15	R 44 9a	E PUMP	245 KILO
ITRSS483	48.00	33.00	27.30	34.00	50.70	19.13	45.4	27.70	,	11	14 17	7 42.88	2720 SQ	14.5 CU	12.4	20	NEMA 5-20	R290	CONDENSATE	770 LBS	22	15	R449a	CONDENSAT	720 LBS
1111334634	1219	838	693	864	1288	486	486 1153 704	704	3	279 3	56 43	2 1089	IN	FT	12.4	20 N	NEIVIA 5-20	K290	PAN	349 KILO 3.3	3.3	3 15	N 44 9d	E PUMP	327 KILO
ITRSS603	60.00	33.00	27.30	34.00	50.70	19.13	57.4	27.70	,	11	14 17	7 54.88	3470 SQ	18 CU FT	9.2	15	NEMA 6-15	R290	CONDENSATE	850 LBS	22	15	R449a	CONDENSAT	790 LBS
111133003	1524	838	693	864	1288	486	1458	704	٠,	279 3	56 43	2 1394	IN	10 COF1	9.2	15	NEIVIA 0-15	K290	PAN	385 KILO	3.3	15	N -1+1 3d	E PUMP	358 KILO

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Counter must have adequate ventilation for proper case performance.
- Packaged food products placed in case must be pre-chilled before placing in case.









Phone: 800-356-4206 **Fax:** 608-424-3234

Email: Geninfo@Federalind.com **Website:** Federalind.com