


| | |
|--------------------------|------------|
| Project: _____ | AIA# _____ |
| Item #: _____ Qty: _____ | SIS# _____ |
| Model #: _____ | |

Bridge Towers

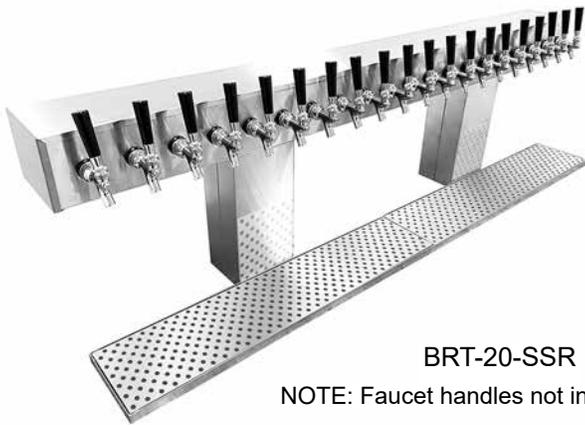

BRT-20-SSR

NOTE: Faucet handles not included.

BRT- - -

Size: Specify the number of faucets from 14, 16, 18, 20, 24, 30

Finish:
 SS = Grainline
 MF = Mirror
 PB=Brass

Standard Features

- All stainless steel construction
- Surface mount, stainless steel drain pan with removable, perforated insert
- 1/4" shanks with 3/16" restriction lines
- Eco friendly foamed-in-place insulated column for extra rigidity. Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion

Specifications

Drains

- Drain pan models - 1/2" tailpiece

Materials

- 20 gauge stainless steel parts include: head, column, drain pan, and perforated inserts
- 16 gauge galvanized steel parts include: interior foamed box
- 11 gauge stainless steel parts include: inner column base and top plate and tower head mounting plate

Shank Sizes

- 1/4" I.D. with 3/16" fittings

Rinser Faucet (optional)

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

Configurable Options

- 6, 8, 10, 12, 14 or 16 faucets
- Available in grainline finish, mirror finish, or brass finish* (*Note: Brass finish towers provided with mirror finish drain pan and brass finish perforated insert)
- Direct-draw air-cooled option available for 14, 16, and 18 faucet sizes* (*Note: Product is not intended for remote air-cooled installations)
- Available with insulated cold plate assembly for recirculating system
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

Optional Rinser Faucet

Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.

03012383
Rinser Faucet Assembly



Intertek

4004503
Conforms to NSF/ANSI STD 372



Optional Rinser Faucet Extension

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>


| | |
|---|-----------------|
| Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com | Approval/Notes: |
| Specifications subject to change without notice. For current specifications please visit our website. | |

Bridge Towers


Drawings

| DOUBLE COLUMN BRIDGE TOWER | | | | |
|----------------------------|---|-----|-----|-----|
| FAUCETS | 14 | 16 | 18 | 20 |
| "A" WIDTH | 44" | 50" | 56" | 62" |
| "B" WIDTH | 21" | 24" | 27" | 30" |
| "C" WIDTH | Each rinser faucet adds 5" to drain pan width | | | |

DOUBLE COLUMN BRT PLAN VIEW

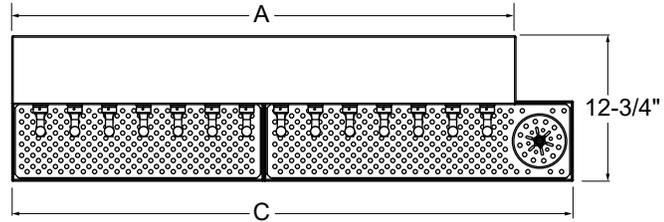


BRT FRONT ELEVATION

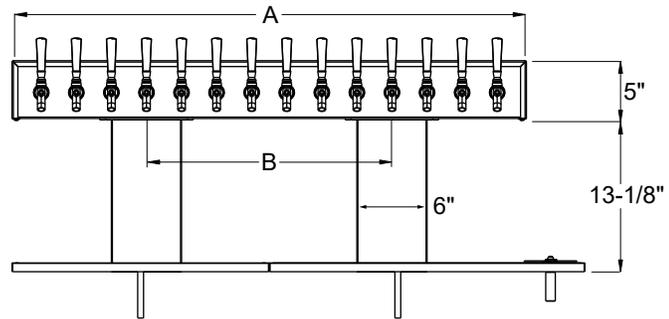


SHOWN WITH OPTIONAL RINSER FAUCET


BRT SIDE VIEW

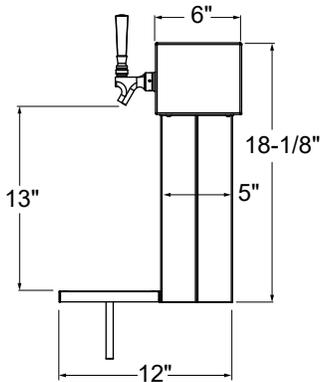

TRIPLE COLUMN BRT PLAN VIEW

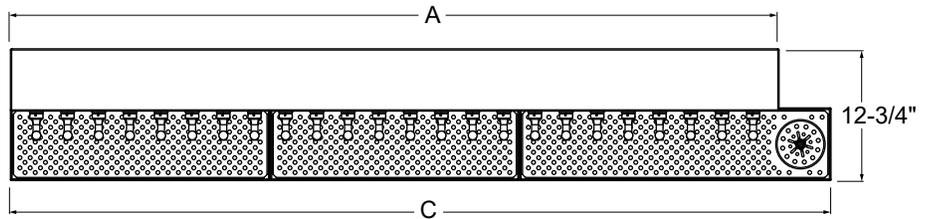

BRT FRONT ELEVATION

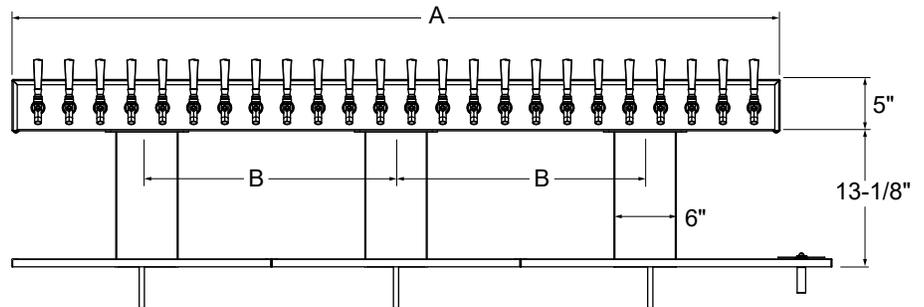

SHOWN WITH OPTIONAL RINSER FAUCET

| TRIPLE COLUMN BRIDGE TOWER | | |
|----------------------------|---|-----|
| FAUCETS | 24 | 30 |
| "A" WIDTH | 74" | 92" |
| "B" WIDTH | 24" | 30" |
| "C" WIDTH | Each rinser faucet adds 5" to drain pan width | |