

## Refrigeration Equipment 1-Door Under Counter Freezer 27" Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738265 (KCHUC27F)

1-Door Under Counter Freezer  
27" Long

### Short Form Specification

#### Item No.

1-door freezer counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature, with required left side door hinges, for units with serial number 24020014 or later. External temperature display.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445 ☐

APPROVAL: \_\_\_\_\_

**Front**

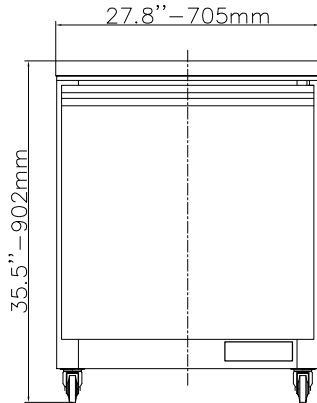

**Side**

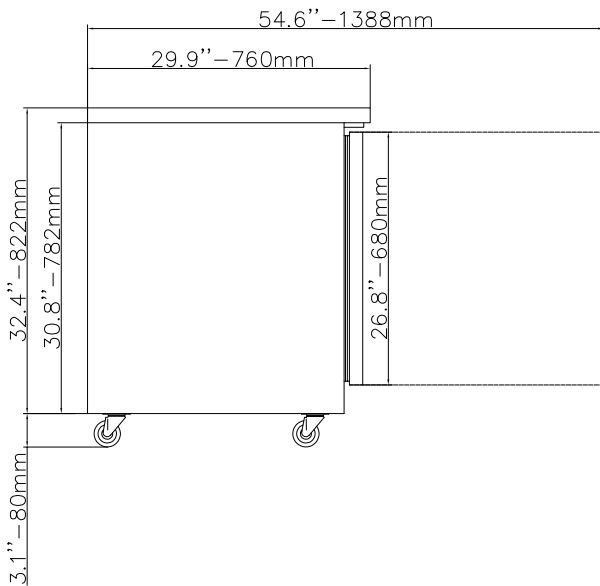

El = Electrical connection

### Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.2 kW           |
| Plug type:             | USA NEMA 5-15P   |

### Capacity:

|                 |             |
|-----------------|-------------|
| Gross capacity: | 6.5 cu.feet |
|-----------------|-------------|

### Key Information:

|                                      |                                              |
|--------------------------------------|----------------------------------------------|
| Number and type of grids (included): | 1 - Vinyl-Coated Steel                       |
| Warranty:                            | 3 / 5 years                                  |
| Door hinges:                         | Right Side                                   |
| Capacity:                            | 6.50004 cu.ft.                               |
| External dimensions, Width:          | 27 3/4" (705 mm)                             |
| External dimensions, Depth:          | 29 15/16" (760 mm)                           |
| External dimensions, Height:         | 35 1/2" (902 mm)                             |
| Number and type of doors:            | 1 Full                                       |
| Internal Dimensions (depth):         | 22 13/16" / (580 mm)                         |
| Internal Dimensions (height):        | 23 1/2" / (597 mm)                           |
| Internal Dimensions (width):         | 22 1/4" / (565 mm)                           |
| Shipping height:                     | 38 3/16" (970 mm)                            |
| Shipping weight:                     | 172 lbs (78 kg)                              |
| Shipping volume:                     | 20.41 ft <sup>3</sup> (0.58 m <sup>3</sup> ) |
| Type of external material:           | Stainless Steel                              |
| Type of internal material:           | Polystyrene                                  |
| Approvals                            | ETL C&US;ETL SANITATION                      |

### Refrigeration Data

|                             |              |
|-----------------------------|--------------|
| Current absorbed:           |              |
| 738265 (KCHUC27F)           | 1.9 Amps     |
| Condenser type:             | Fin & tube   |
| Operating temperature min.: | -9.4 °F      |
| Compressor power:           | 1/4 hp       |
| Operating temperature max.: | 8.6 °F       |
| Defrost type:               | Auto Defrost |

### Sustainability

|                     |      |
|---------------------|------|
| Refrigerant type:   | R290 |
| GWP Index:          | 3    |
| Refrigerant weight: | 95 g |

