

Refrigerated Sushi Showcases with Flat Glass

Item: 43492
Model: RS-CN-0044

44393
RS-CN-0064

44394
RS-CN-0084

44395
RS-CN-0104



Keep your sushi fresh, delicious, and ready to serve while boosting visibility and sales.

Omcan's refrigerated sushi cases are ideal for displaying a variety of sushi while preserving freshness and presentation—perfect for sushi bars and restaurants. The unit features bright internal LED lighting and a front flat glass design that enhances product visibility. A digital temperature controller and display ensures precise temperature. Sliding rear doors provides convenient access while the direct cooling system delivers consistent performance. An additional non-refrigerated upper shelf offers extra storage, and GN pans can be ordered separately.

FEATURES:


- Brilliant Internal LED illumination
- Additional non-refrigerated upper shelf
- Digital temperature controller & display
- Front flat glass
- Sliding doors
- Direct cooling system
- GN pan can be ordered

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



FOR 44395 ONLY



FOR 44394, 44393, 43492



NEMA
5-15P
125VAC / 15 AMP





FRONT VIEW




BACK VIEW


TECHNICAL SPECIFICATION

Features	45" wide with 1.55 cu.ft. capacity	51" wide with 2.26 cu.ft. capacity	58" wide with 3 cu.ft. capacity	69" wide with 3.67 cu.ft. capacity
Item	43492	44393	44394	44395
Model	RS-CN-0044	RS-CN-0064	RS-CN-0084	RS-CN-0104
Capacity	1.55 cu.ft. / 44 L	2.26 cu.ft. / 64 L	2.96 cu.ft. / 84 L	3.67 cu.ft. / 104 L
Number of Doors	1 Sliding Door	1 Sliding Door	1 Sliding Door	1 Sliding Door
Number of Pans	4 x 1/3 GN	5 x 1/3 GN	6 x 1/3 GN	5 x 1/2 GN
Power	180 W	180 W	180 W	180 W
Amps	1.6 A	1.6 A	1.6 A	1.6 A
Electrical	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph
Temperature Range	12 to 0°C / 54 to 32°F	12 to 0°C / 54 to 32°F	12 to 0°C / 54 to 32°F	12 to 0°C / 54 to 32°F
Refrigerant	R290	R290	R290	R290
Injection	35g	35g	35g	35g
Interior Dimensions (WDH)	29" x 14" x 11" / 744 x 360 x 285 mm	36" x 14" x 11" / 920 x 360 x 285 mm	43" x 14" x 11" / 1096 x 360 x 285 mm	54" x 14" x 11" / 1367 x 360 x 285 mm
Net Weight	86 lb. / 39 kg.	94.8 lb. / 43 kg.	103.6 lb. / 47 kg.	116.8 lb. / 53 kg.
Net Dimensions (WDH)	44.5" x 15.6" x 14.7" / 1130 x 396 x 374 mm	51.4" x 15.6" x 14.7" / 1130 x 396 x 374 mm	58.4" x 15.6" x 14.7" / 1483 x 396 x 374 mm	69" x 15.6" x 14.7" / 1753 x 396 x 374 mm
Gross Weight	93 lb. / 42 kg.	101 lb. / 46kg.	110 lb. / 50 kg.	125.7 lb. / 57 kg.
Gross Dimensions (WDH)	46.7" x 18.3" x 17" / 1187 x 465 x 430 mm	53.7" x 18.3" x 17" / 1363 x 465 x 430 mm	60.6" x 18.3" x 17" / 1539 x 465 x 430 mm	71.3" x 18.3" x 17" / 1810 x 465 x 430 mm
Plug Type	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P


TECHNICAL DRAWING

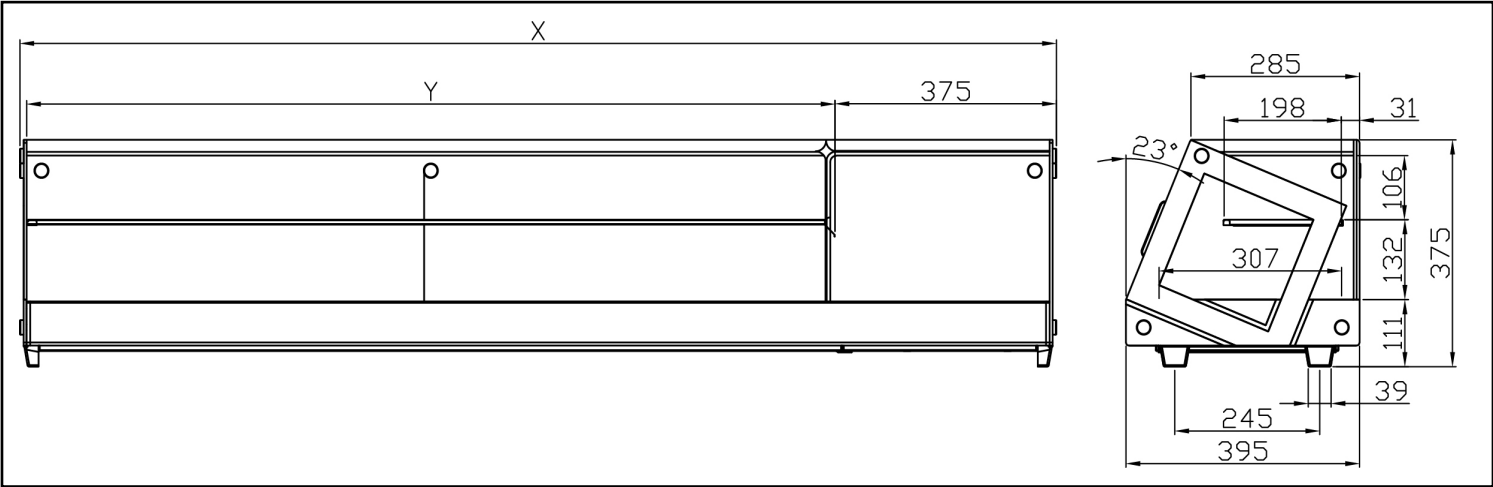


Item: 43492/ 45"/ 1.55 cu.ft. /44 L

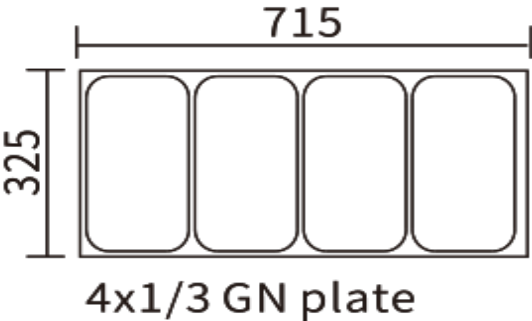

Item: 44394/ 58"/ 2.96 cu.ft. / 84 L

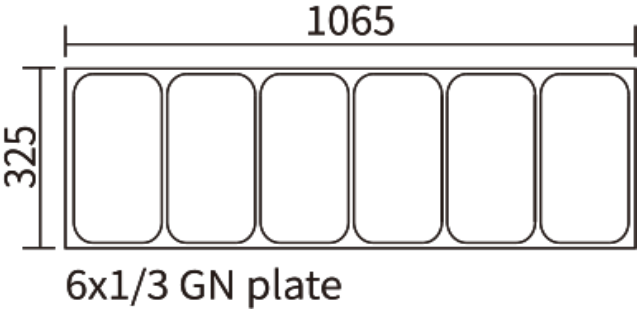

Item: 44393/ 51"/ 2.26 cu.ft. / 64 L

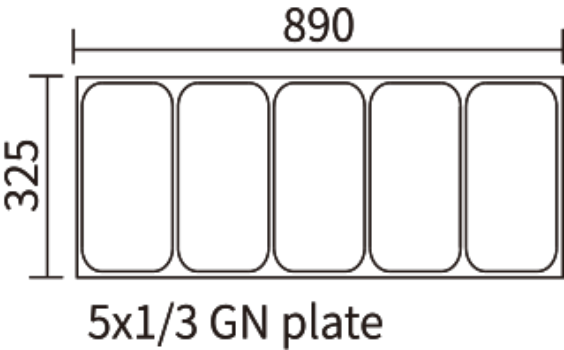

Item: 44395/ 69"/ 3.67 cu.ft. / 104 L

