# Structural Concepts® DELIVERING FRESH. ALWAYS.®

• MD472DR 50-1/4"L x 37-1/8"D x 72-1/2"H • MD672DR 74-1/4"L x 37-1/8"D x 72-1/2"H

### Included

- Remote DX refrigeration
- Glass swinging front doors
- LED top & shelf lights
- MD472DR 2 Doors
- MD672DR 3 Doors
- One year parts & labor warranty
- · Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



Standard Features	Additional Options					
Powder coated Silversan Black	Powder coated (stock/non-stock colors)					
Powder coated Silversan Black	Stainless steel					
Powder coated Silversan Black	Powder coated (stock/non-stock colors)					
	Stainless steel					
Rail system for shims						
• 1" Boston bumper (specify color)	1" Stainless steel plate rail bumper					
Full w/stainless steel mirror interior	Cutaway w/glass					
	None (specify per line-up)					
Left hand hinge (customer facing)	Right hand hinge (customer facing)					
Flat header						
• None	Universal price tag molding (clear w/ open top)					
None (solid back panel)	Solid rear swinging door(s) w/lock					
• None	2"H Full depth display riser(s) (matches interior)					
(4) Lighted clear glass shelves	(5) Lighted clear glass shelves					
LED 3500K w/ frosted lens						
Electrical leads (remote)						
• Remote DX refrigeration	¹ • Remote w/thermostat, solenoid & TXV					
• None	CPC discharge air sensor (remote)					
	Second year parts & labor warranty					
	Powder coated Silversan Black Powder coated Silversan Black Powder coated Silversan Black  Rail system for shims  1" Boston bumper (specify color) Full w/stainless steel mirror interior  Left hand hinge (customer facing) Flat header None None  None (solid back panel) None  (4) Lighted clear glass shelves LED 3500K w/ frosted lens Electrical leads (remote)  Remote DX refrigeration					

Std Notes: 1 - Read important notes for remote options

Option Notes: 1 - Read important notes for remote options


## Structural Concepts

DELIVERING FRESH. ALWAYS.™


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.								
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F						
1	Packaged / unpackaged refrigerated products	40						

### **PLAN VIEW**

### SIDE VIEW

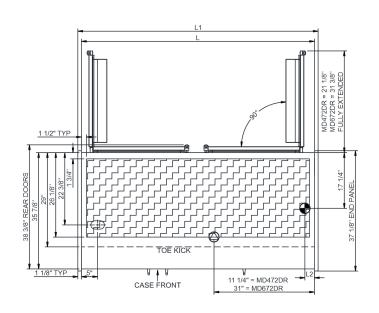

REAR DOORS LOADING SPACE								
MODEL	WD x HT x QTY							
MD472DR	17" x 47 3/4" x 2							
MD672DR	27 1/8" x 47 3/4" x 2							



NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH  $\frac{3}{4}$ " OR  $\frac{11}{2}$ " PVC TUBE).

REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
MD472DR	48.00	50.25	3.00	Remote (DX)	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple	26.00	1469	1360	1,050
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple	26.00	1469	1360	
				Remote (R744 TRANSCRIT	Circuit #1	110-120	1	60	2.00	100	2+G	Leads Multiple		1469	1360	
MD672DR	72.00	74.25	3.00	Remote (DX)	Circuit #1	110-120	1	60	2.00	135	2+G	Leads Multiple	28.00	2246	2080	1,400
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	2 00	135	2+G	Leads Multiple	20.00	2246	2080	í I

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals:					
All Models	Accordance with AHRI Std 1200				
	ETL Listed to UL 471				
	ETL Listed to CAN/CSA 22.2 No. 120				
	ETL Sanitation to NSF/ANSI 7				
wYERTETERT-					



AHRI Std 1200

**DOE 2017** 

#### **Important Notes:**

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) Units must be shimmed during installation to ensure the unit is level and plumb.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.