



CP1FL60  
 stainless steel doors, and top



4004503  
 Conforms to NSF/ANSI STD 7 and UL STD 471  
 Certified to CSA STD C22.2 No. 120  
 Listed to NSF Standard 7 for open food as a  
 storage refrigerator

Intended for indoor use.

### Standard Features

- Self-contained
- Locking door(s)
- LED interior lighting
- Heated mullion to minimize condensation
- Evaporator above compressor compartment to maximize storage capacity
- Two adjustable, coated-wire shelves per door section

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

**Coolers, Pass-Thru,  
 One Zone, Front Serviced,  
 Low Profile**

<b>CP1FL</b>	CP1FL32, CP1FL36, CP1FL52, CP1FL60, CP1FL72, CP1FL84
--------------	---

**CONFIGURATION  
 HIGHLIGHT**

**DOORS  
 IN NINE  
 FINISHES**

### Configurable Options

- |   |   |
|---|---|
| <p><b>Temperature:</b></p> <ul style="list-style-type: none"> <li>• Beer/Food - 34°F to 40°F</li> <li>• White wine - 50°F to 55°F</li> <li>• Red wine - 60°F to 65°F</li> </ul> <p><b>Refrigeration Compartment Location:</b></p> <ul style="list-style-type: none"> <li>• Left or Right</li> </ul> <p><b>Refrigeration Compartment Cover Finish:</b></p> <ul style="list-style-type: none"> <li>• Black vinyl-clad</li> <li>• Stainless steel</li> <li>• Jeweled stainless</li> <li>• Laminated</li> <li>• Unlaminated</li> </ul> <p><b>Door Style &amp; Finish</b> (<i>specify per door section</i>):</p> <ul style="list-style-type: none"> <li>• Black vinyl-clad</li> <li>• Stainless steel</li> <li>• Jeweled stainless</li> <li>• Laminated</li> <li>• Unlaminated</li> <li>• Glass, black vinyl-clad</li> <li>• Glass, stainless steel</li> <li>• Glass, jeweled stainless</li> <li>• Glass, laminated</li> </ul> <p><b>Door Hinge Location</b> (<i>specify for each door</i>):</p> <ul style="list-style-type: none"> <li>• Left or Right</li> </ul> | <p><b>Door Handle:</b></p> <ul style="list-style-type: none"> <li>• Signature</li> <li>• Pull-tab</li> <li>• Tube</li> </ul> <p><b>Top Style:</b></p> <ul style="list-style-type: none"> <li>• No finished top</li> <li>• Stainless top</li> </ul> <p><b>Left and Right Side Finish:</b></p> <ul style="list-style-type: none"> <li>• Black vinyl-clad</li> <li>• Stainless steel</li> </ul> <p><b>LED Lighting Style:</b></p> <ul style="list-style-type: none"> <li>• Bright white (7,000k)</li> <li>• Warm white (3,500k)</li> <li>• Amber (2,700k)</li> <li>• Blue</li> </ul> |
|---|---|

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

## Coolers - Pass-Thru, One Zone, Front Serviced, Low Profile

### Specifications

		CP1FL32	CP1FL36	CP1FL52	CP1FL60	CP1FL72	CP1FL84
Dimensions	Length	32"	36"	52"	60"	72"	84"
	Number of Sections	1	1	2	2	3	3
	Door Opening	16"	20"	16"	20"	16"	20"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, Dedicated 15 amp circuit is required					
	Full Load Amps	3.5	3.5	3.5	3.5	7.0	7.0
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*					
Refrigeration	Refrigerant	R290 - 125 grams, 3.88 oz., 0.24 pounds					
	Compressor	Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons				Reciprocating, 1/4 HP, 2200 BTUH, 0.18 Tons	
	Heat Rejection	1430 BTUH	1430 BTUH	1430 BTUH	1430 BTUH	2867 BTUH	2867 BTUH
Operating Range		34°F (1°C) to 65°F (18°C)					
Plumbing		Automatic condensate evaporator; no drain connection required †					
Weight Bearing Capacity		Countertops and other accessories should not exceed 200 pounds per door					

#### Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: back and bottom



† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.



### Capacities

	CP1FL32	CP1FL36	CP1FL52	CP1FL60	CP1FL72	CP1FL84
12 oz. bottles, cases	4.4	5.8	9.7	12.7	15.4	19.9
750ml wine bottles	35	42	66	90	106	137
1/2 barrel kegs	N/A	N/A	N/A	N/A	N/A	N/A
1/6 barrel kegs	N/A	N/A	N/A	N/A	N/A	N/A



# Coolers - Pass-Thru, One Zone, Front Serviced, Low Profile

## Drawings


### PLAN VIEW

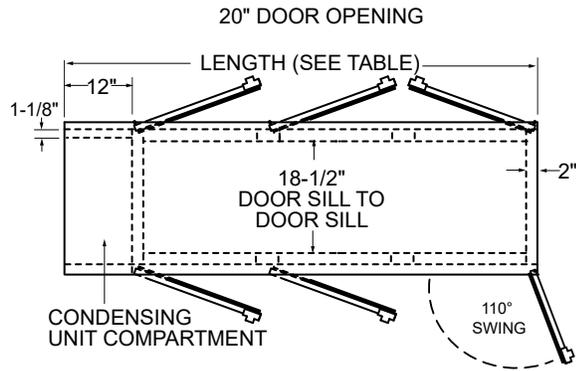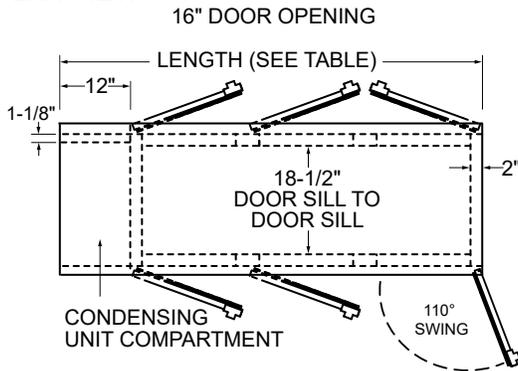


### FRONT VIEW

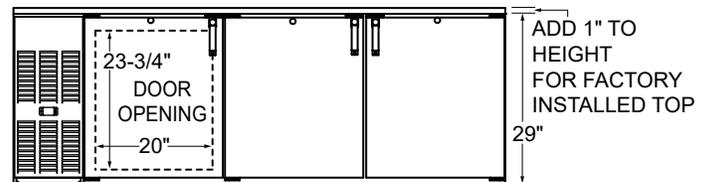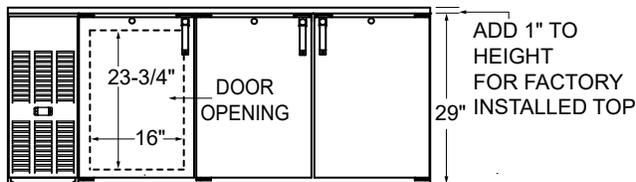


### SIDE VIEW

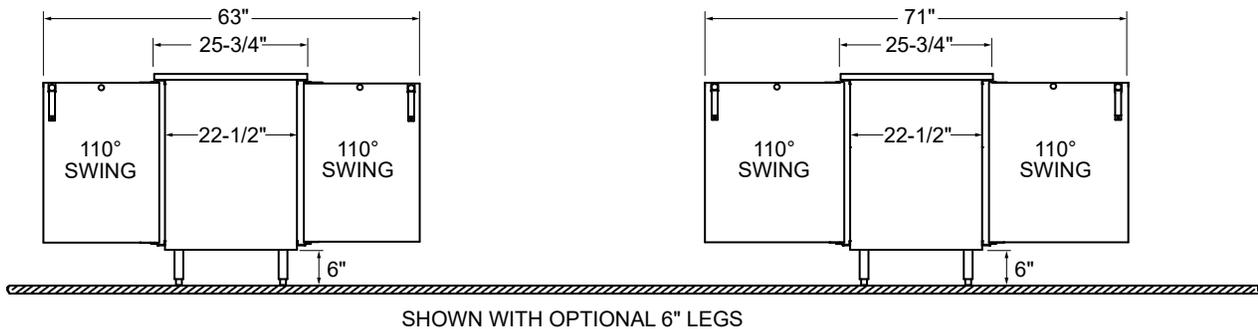

### STANDARD CABINET

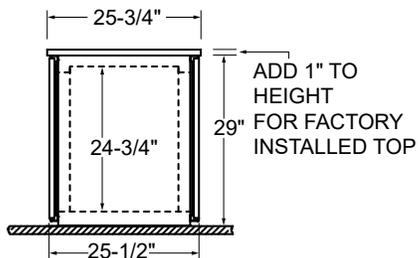

### OPTIONAL LEGS AND CASTERS

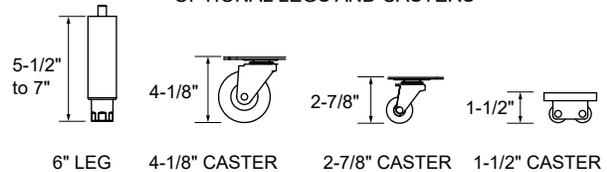

Note: Available with compressor left or right.  
Compressor left model shown.