

# DESIGNER LINE BASE MODEL

## Model: DRA60NSSBS

Natural Refrigerant R-290 Model

*Designer Line*

### 60" Base Worktop Refrigerator with Solid Doors and 5½" Backsplash



ENERGY STAR® Qualified Commercial Refrigerator

Heavy gauge #300 Series stainless steel top, stainless steel front, end panels and interior, galvanized steel rear and grill.



## Options and Accessories

(upcharge and lead times may apply)

|                                       |                                                           |
|---------------------------------------|-----------------------------------------------------------|
| Pan slides (large section only)       | Different size casters                                    |
| Stainless steel back                  | Door locks                                                |
| Additional epoxy coated steel shelves | Front breathing                                           |
| Stainless steel shelves               | Compressor left (standard on right)                       |
| Overshelves (single or double)        | Drawers in lieu of doors**                                |
|                                       | Drawer in lieu of door section above the condensing unit* |

Consult factory for other model configurations, options and accessories.

\*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

\*\*Two tier (larger section): (2) 12x20x6 pans per drawer

\*\*Two Narrow: (1) 12x20x6 pan per drawer

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

Expansion valve system

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable rear and side grills

6" adjustable stainless steel legs

### MODEL FEATURES

Electronic control, off-cycle defrost

Refrigerated section with door above the condensing unit

Reversing condenser fan motor

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**NOTE:** DRA60 models come standard with a door over the condensing unit, a smaller width door (left section) and larger width door (center section). A drawer over the condensing unit is an option. The option of having the door/drawers located in the opposite sections **MUST** be indicated at the time of ordering.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                          |                  |
|----------------------------------------------------------|------------------|
| Net Capacity (cubic feet)                                | 19 (538 l)       |
| Width, Overall (inches)                                  | 60 (1524 mm)     |
| Depth, Overall (inches)<br>(including handles & bumpers) | 37 (939 mm)      |
| Height, Overall (inches)<br>(including 6" legs)          | 41 1/2 (1054 mm) |
| Shelf Area (square feet)                                 | 7.1 (0.7 sq m)   |
| Number of Shelves                                        | 4                |
| Number of Full Doors                                     | 2                |
| Number of Half Doors                                     | 1                |
| Interior Depth (inches)                                  | 30 (762 mm)      |
| Interior Height (inches)                                 | 26 (660 mm)      |
| Interior Height (inches)<br>(above condenser)            | 12 1/2 (318 mm)  |
| Interior Width (inches)                                  | 56 (1422 mm)     |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4+ |
| Capacity (BTU per hour)*    | 1930 |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Total Amps (International)                     | 4.8 (3.3)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA

|                          |                  |
|--------------------------|------------------|
| Weight (pounds)          | 400 (182 kg)     |
| Height - Crated (inches) | 43 3/4 (1111 mm) |
| Width - Crated (inches)  | 62 (1575 mm)     |
| Depth - Crated (inches)  | 47 (1194 mm)     |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.




PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.


Intertek

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

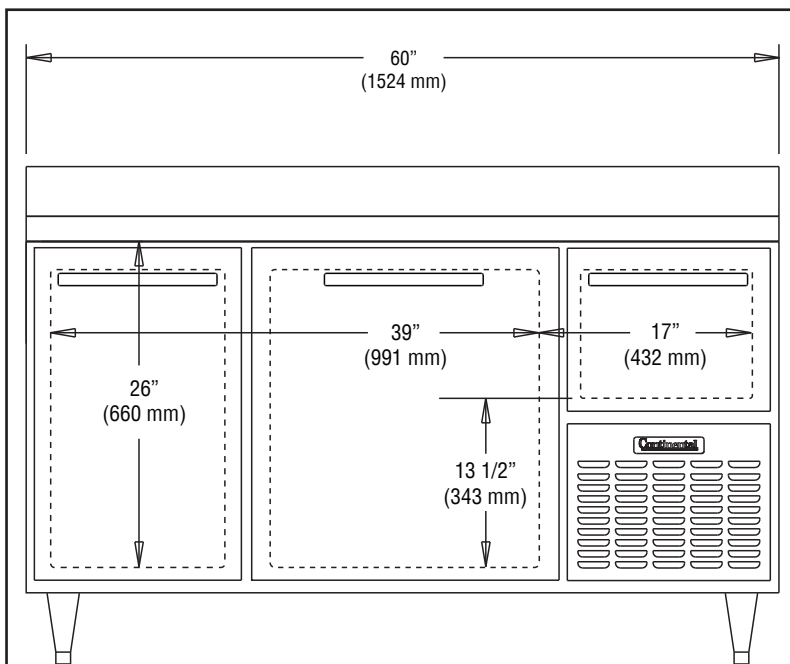

FRONT VIEW

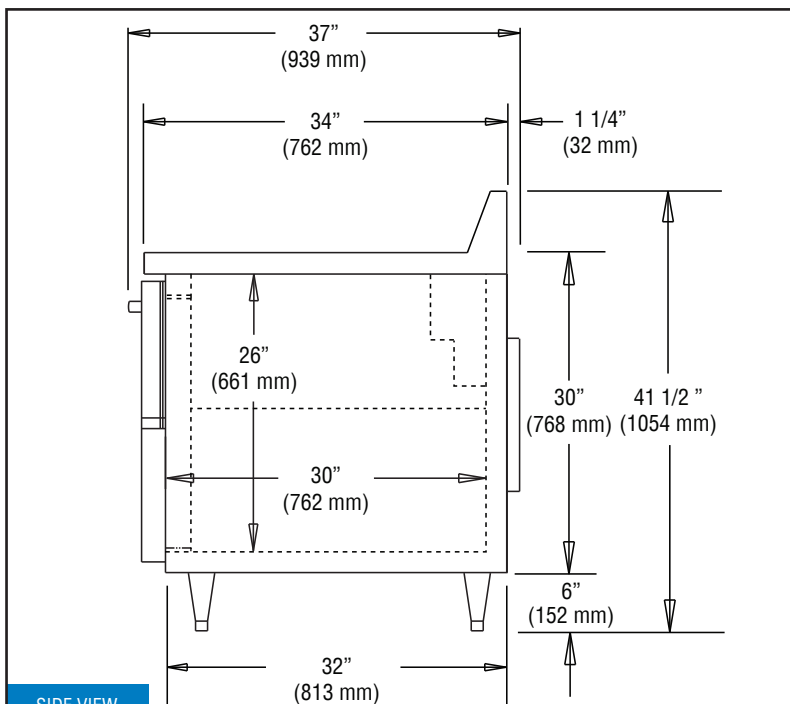

SIDE VIEW

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

REVISED: 4/11/25