

## VU300 Series single side ice and beverage dispenser



VU300B8LP shown



Model configurations					
Integral beverage cooling	# of valves	Sides	Ice tower location	Valve type	Item number
with	8	single sided	left	lever	VU300B8LL
				push-button	VU300B8LP
			right	lever	VU300B8RL
				push-button	VU300B8RP

Standard with Cornelius UFB1 valves.

### Features

#### 300 lb (136 kg) undercounter ice storage

#### Upscale drink station

- low profile with ice storage under the counter
- auto-fill with an ice machine out of view using RIDE® remote ice delivery equipment
- ideal for island configurations
- fits into ADA compliant 34.00" (86.4 cm) counters

#### Optimized throughput with left or right side ice dispense chute – customers fill cups faster for shorter lines

#### Integral ice-water-bath beverage cooling option located behind beverage valves – delivers cold, high quality beverages and excellent casual drink performance

#### Durable, full stainless exterior

#### Easier beverage connections

- beverage valves with factory installed beverage lines for easy field connection
- four center valves configured as QuickCARB™ valves, individually changeable from carbonated to non-carbonated flavors without disconnecting water lines

#### Pre-configured for Follett® RIDE model Chewblet® ice machines

- connect up to two Follett ice machines
- consumer-preferred, chewable compressed nugget ice
- slow melting, maintains drink temperature

#### Faster, safer manual loading of ice at waist height

- safe, easy waist-height loading from front
- eliminates overhead lifting of buckets or loading from ladders
- allows quick reloading during serving period with minimal disruption
- may be manually loaded with cube ice up to 1.00" (2.54 cm) square or Chewblet ice

#### Certifications (applied to all products unless otherwise noted)



### Options and accessories<sup>1</sup>

4.00" (10.16 cm) stainless steel leg (individual) adjustable to 6.75" (17.15 cm) (item# 00137257)

Kit to integrate with Ice Manager™ diverter valve (item# 00185173)


<sup>1</sup> Certifications do not apply to options and accessories.

## Specification


Ice storage capacity	300 lb (136 kg)
<b>W</b> Width	40.88" (103.8 cm)
<b>D1</b> Depth	32.38" (82.2 cm)
<b>D2</b> Depth, drain pan interior	9.38" (23.83 cm)
<b>H1</b> Height, upper section	25.25" (64.1 cm)
<b>H2</b> Height, lower section	29.50" (74.9 cm)
<b>H3</b> Height, leg	adjustable 4.00" - 6.75" (10.16 - 17.14 cm)
<b>H4</b> Ice dispense height clearance	10.88" (27.6 cm)
<b>K1</b> Ice dispense chute	utility connections are on same side as ice dispense chute
<b>L1</b> Countertop to lever	8.62" (21.89 cm)
<b>L2</b> Front of dispenser to lever	9.25" (23.50 cm)
Installation clearance	60.00" (152.4 cm) above counter for drop-in installation, 1.25" (3.18 cm) maximum counter thickness
Service clearance	12.00" (30.5 cm) minimum on ice transport tube entry side for connections, 49.00" (124.5 cm) minimum above counter for auger removal
NOTE: For additional information refer to form# 3105.	
<b>C1</b> Electrical	7 amps. Dispenser 15 amps circuit. 8' (2.4 m) cord and NEMA 5-15 90° plug provided with each dispenser. Separate circuits and disconnects required for each dispenser.
<b>C2</b> Drain - ice storage	3/4" FPT – supplied with air break
<b>C3</b> Drain - beverage water-bath	1/2" ID hose
<b>C4</b> Drain - drain pan	3/4" drain nipple
<b>C5</b> Beverage lines	1/4" ID syrup beverage hose, 3/8" ID carbonated water beverage hose, 3/8" ID plain water beverage hose
<b>C6</b> Ice machine electrical connection	Pre-wired bin signal junction box with twist lock connector(s). Standard length is 20' (6.1 m).
<b>C7</b> Ice machine ice transport tube connection	two ice transport tube entry holes on each side (can enter either side)
Approximate net weight	393 lb (178 kg)
Approximate shipping weight	433 lb (197 kg)
NOTE: For indoor use only	

SHORT FORM SPECIFICATION: Ice and beverage dispenser to be Follett model \_\_\_\_\_. Dispenser to store up to 300 lb (136 kg) of ice and allow loading of ice at waist level from front. Full-length drain to be one-piece molded polyethylene. Beverage rail to have eight (8) Cornelius UFB1 valves. Beverage rail to be of stainless steel with plastic trim. Beverage manifold to be pre-plumbed with center 4 valves individually changeable from carbonated to non-carbonated flavors without disconnecting water lines. To include 4.00" - 6.75" (10.16 - 17.15 cm) adjustable legs for dispenser support. Storage area to be insulated with CARB compliant non-HFC foam. Electric keyswitch standard. Dispenser to be pre-configured to accept up to two Follett RIDE model ice machines, sold separately. 8' (2.4 m) cord and NEMA 5-15 90° hospital grade plug provided. NSF, UL and cUL listed.

## Dimensional drawing

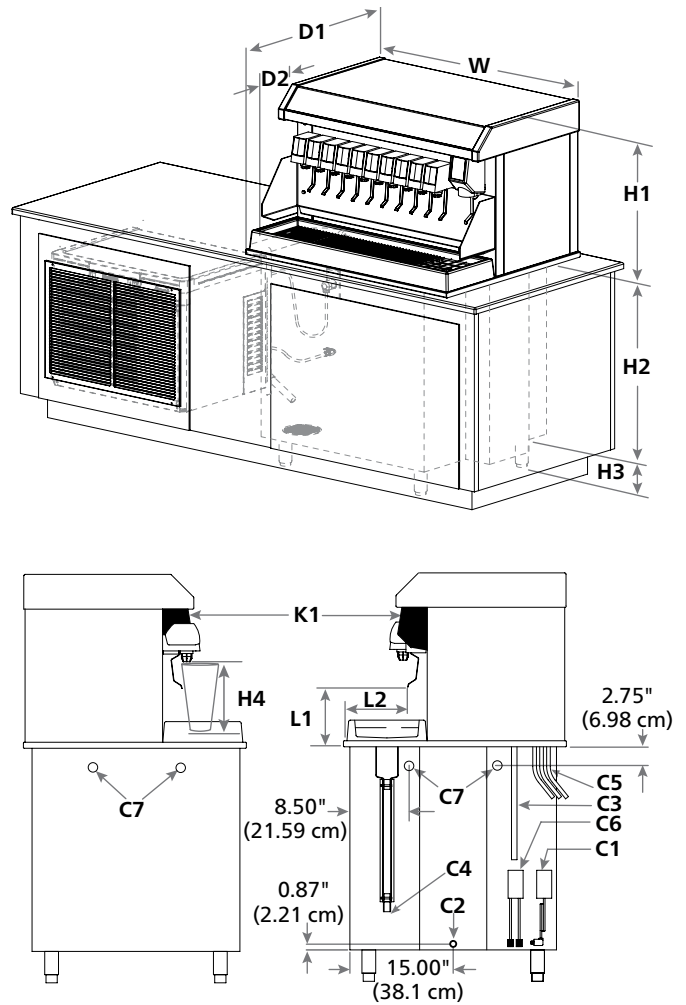

## Counter cutout detail

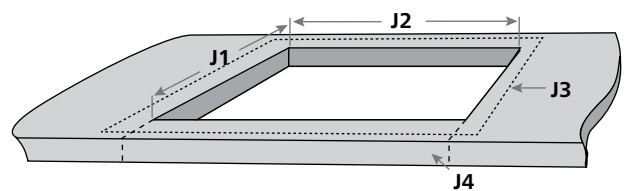

<b>J1</b> Cutout depth	30.375" (77.152 cm) ± .0125" (.0317 cm)
<b>J2</b> Cutout width	38.5" (97.79 cm) ± .0125" (.0317 cm)
<b>J3</b> Flat surface required	40.875" (103.822 cm) W x 33.00" (83.82 cm) D
<b>J4</b> Optional – counter front may be removed for slide-in installation	

ICE MANAGER, QUICKCARB and VISION are trademarks of Follett Products, LLC. CHEWBLET, FOLLETT and RIDE are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.