

GHSS460RLB
GHSS560RLB
GHSS660RLB
GHSS660RLB
GHSS860RLB
GHSS860RLB
GHSS1060RLB
GHSS1060RLB
GHSS1260RLB
GHSS1260RLB
GHSS1260RLB
GHSS1260RLB
GHSS1260RLB
GHSS1260RLB

## Included

- Remote DX refrigeration
- LED top & shelf lights
- One year parts & labor warranty
- · Stainless steel rear exterior
- Warmest average product temperature of 40°F or less



Specify	Standard Features	Additional Options	
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)	
		Powder coated (stock/non-stock colors)	
		Powder coated Silversan Black	
		Stainless steel	
INTERIOR COLOR	Powder coated Silversan Black	Stainless steel	
LOWER FRONT PANEL COLOR	FRONT PANEL COLOR • Powder coated Silversan Black • Powder coated (stock/non-stock colors)		
		Stainless steel	
BASE SUPPORT	Rail system for shims		
BUMPER FRONT	• 1" Boston bumper (specify color)	1" Stainless steel plate rail bumper	
END PANELS	Full w/stainless steel mirror interior	• Cutaway w/glass	
		None (specify per line-up)	
PRICE TAG MOLDING	• None	1" Price tag molding (black or silver)	
		Universal price tag molding (clear w/ open top)	
REAR DOORS	None (solid back panel)	Solid rear swinging door(s) w/lock	
SHELVING	• 14" & 16" & 18" & 22" Solid shelving	• 14" & 16" & 18" & 22" Glass shelving	
LIGHTS	LED 3500K w/ frosted lens	LED 4000K w/ frosted lens	
ELECTRICAL CONNECTION	Electrical leads (remote)		
REFRIGERATION	• Remote DX refrigeration	• Remote w/thermostat, solenoid & TXV	
SENSOR	• None	CPC discharge air sensor (remote)	
ACCESSORIES		Drain strainer	
		Night curtain, retractable, non-locking	
		Removable wire security cover, locking	

Std Notes: 1 - Read important notes for remote options


Option Notes: 1 - Read important notes for remote options


## Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		nation below.	
Zone	Intended Product To Be Displayed		Warmest Avg Prod Temp ° F
1	Packaged refrigerated products		40

PLAN VIEW SIDE VIEW

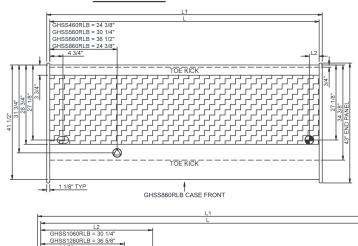

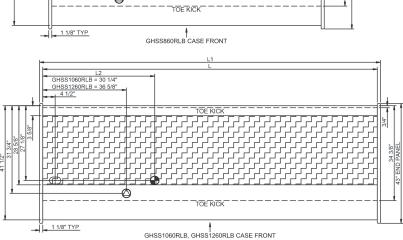

**CURVED PROFILE** OPTIONAL SCALE CASE\_\_\_FRONT /M// 18' 30 7/8 25" 33 1/2" TOE KICK

NOTE: ALL DIMENSIONS APPROXIMATE

REFRIGERATION LINE CONNECTION. REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA. DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications Conv. Para. Amps Rack Rack Fst Watts Wires System Circuit Volts **NEMA Plug** Model BTUH Wt GHSS460RLB 48.75 51.0 Remote (DX) 110-120 Leads Multip 20.00 1.075 GHSS560RLB 60.63 62.8 Remote (DX Circuit #1 110-120 60 2+G 20.00 652 1,050 GHSS660RLB Remote (DX) 110-120 1 60 2.62 193 2+G Leads Multiple 20.00 9223 8540 1,200 73.13 3.50 75.3 Circuit #1 110-120 2.67 193 2+G Leads Multiple 20.00 8540 Remote (GLYCOL 35%) Circuit #1 1 60 9223 GHSS860RLB 97.50 99.75 3.50 Remote (DX) Circuit #1 110-120 1 60 3.00 249 2+G Leads Multiple 20.00 12053 11160 1.225 Remote (GLYCOL 35%) 110-120 1 60 3.05 249 2+G Leads Multiple 20.00 1205 11160 GHSS1060RLB 1,300 121.13 123.38 40.50 Remote (DX) 110-120 60 3.86 295 2+G Leads Multiple 20.00 13932 12900 Circuit #1 110-120 Remote (GLYCOL 35%) 60 3.86 Leads Multiple 20.00 13932 29 2+G 1290 Circuit #1 GHSS1260RLB 146.25 148.50 45.13 Remote (DX) Circuit #1 110-120 4.59 2+G Leads Multiple 20.00 14515

\*\*\* Does not include electric defrost on freezer models.

Regulatory Approvals: All Models Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7

DOE 2017 AHRI Std 1200

## **Important Notes:**

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) 45" minimum door entry clearance required (without shipping skid).
- 4) Units must be shimmed during installation to ensure the unit is level and plumb.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.