



ULR93B-D2/-D4

Undercounter 93" Side Mount Refrigerator
with Two Doors/Two Drawers, with One Door/Four Drawers



ULR93B-D2-D4
06/27/25
Item # 13695

W x D x H

93" x 33.25" x 33.875" *
*with 4" casters



ULR93B-D2



ULR93B-D4



Dimensions / Capacity

| | |
|--|-----------------------|
| Interior Storage Capacity (CF) (AHAM) | 30.17 ft ³ |
| Overall Width x Depth (including 1" bumper) | 93" x 33.25" |
| Height (including 4" casters) | 33.875" |
| Door Opening Width x Height | 22.5" x 23" |
| Depth with Door Fully Open (including 1" bumper) | 57.75" |
| Depth with Drawer Fully Open (including 1" bumper) | 57.5" |
| Adjustable shelves / Shelf Dimensions (W x D) | 4 / 24.5" x 25.5" |
| Crated Weight | 500 / 545 lbs. |
| Crated Length x Width x Height | 95.25" x 34.5" x 36" |

Electrical / Refrigeration

| | |
|--------------------------------------|---------------|
| Voltage | 115/60/1 |
| HACR Breaker | 15.0 Amps |
| Electrical Connection (NEMA) | 5-15P |
| Voltage Range | 104-126 |
| Ambient Temp. Range | 45° to 100°F |
| Control Setpoint Range | 28° to 45°F |
| Amperage | 5 |
| Energy Consumption (kWh/day) @NSF | 1.879 |
| Heat Rejection (BTU/Hr.) @NSF | 448 |
| Approx. Nominal Compres. BTU/HR (HP) | 2431 (1/3HP) |
| Refrigerant / Charge Amount (oz) | R290 (2.4 oz) |

Options

- | | |
|--|---|
| <input type="checkbox"/> 2" Casters (HS-5037, set of 4) | <input type="checkbox"/> Addtl. Epoxy Shelves (HS-5151, 1pk) |
| <input type="checkbox"/> 4" Casters (HS-5036, set of 4) | <input type="checkbox"/> Addtl. Stainless Shelves (HS-5153, 1pk) |
| <input type="checkbox"/> Foot pedal kit (HS-5555, Lft hinge) | <input type="checkbox"/> Drawer divider bar (HS-4007, Vertical) |
| <input type="checkbox"/> Foot pedal kit (HS-5556, Rt hinge) | <input type="checkbox"/> Drawer divider bar (HS-5691, Horizontal) |
| <input type="checkbox"/> Overshelves (HS-5229 single) | <input type="checkbox"/> Drawer liner (HS-HS-5740) |
| <input type="checkbox"/> Overshelves (HS-5228 double) | |



Seven year warranty
on labor, parts, and
compressor. Valid in
United States, Canada,
Puerto Rico and U.S.
Territories.

For more information, please visit
hoshizakiamerica.com/support/warranty/

Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Front breathing air flow design allows for 1" of rear wall clearance
- ▶ Stainless steel exterior front, sides, and top with stainless steel interior sides, back, and floor
- ▶ Engineered to maintain NSF-7 temperatures in 100°F ambient
- Environmentally friendly R290 hydrocarbon refrigerant
- Cabinet and drawers are insulated with 2" CFC free, foamed in place polyurethane
- Drawer module frames, acetal rollers, and drawer stops are formed of heavy duty stainless steel all welded construction and securely fastened in the cabinet
- Drawer slides are constructed of 14 gauge stainless steel with acetal rollers
- Drawer slides have a dynamic load capacity of 250 lbs.
- Drawer frames are formed of 14 gauge stainless steel and securely fastened in the cabinet
- Drawers will accommodate (2) 12 x 20 x 6" deep pans (pans by others)
- Extruded aluminum flush mount door/drawer handle
- Shelves hold a full- size sheet pan & 120 lbs. capacity
- Two epoxy coated shelves per section is standard
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Field reversible doors with magnetic snap-in gaskets
- Magnetic door gaskets are easily removable for cleaning
- Digital temperature display
- Removable air filter for easy cleaning
- Hot gas condensate removal
- Mullion heaters for reduced condensation
- E-coated evaporator coil
- Standard with 4" casters (three with brakes)
- 10 ft. cord and plug

*Door or drawer can be located in any section of the cabinet.
Location must be indicated at time of ordering.*

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




ULR93B-D2

Undercounter 93" Side Mount Refrigerator
with Two Doors/Two Drawers, with One Door/Four Drawers




ULR93B-D2-D4
06/27/25
Item # 13695

FRONT VIEW

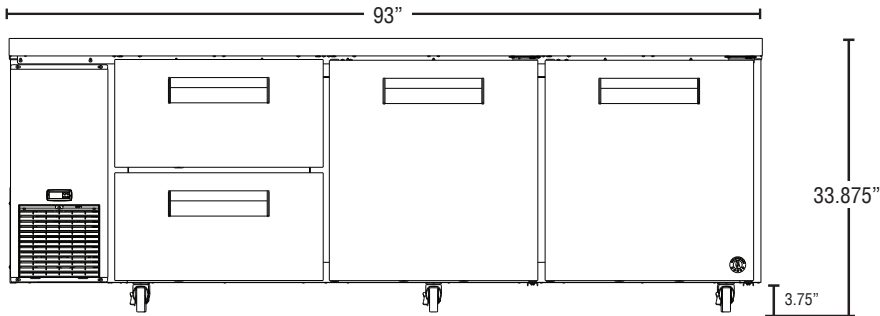


ULR93B-D2

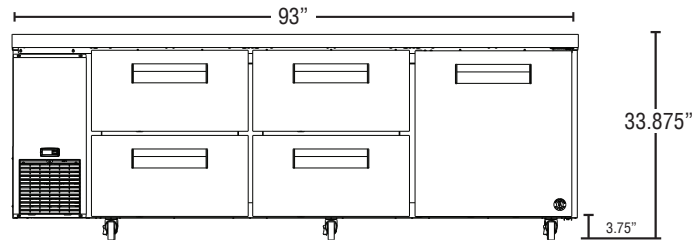


ULR93B-D4


SIDE VIEW

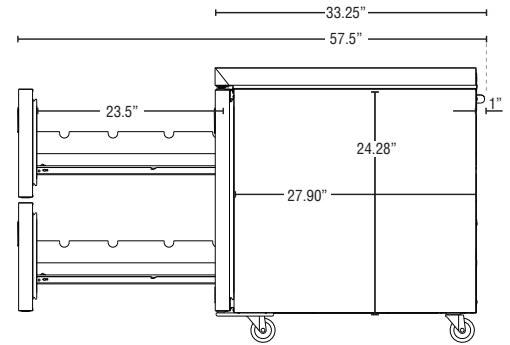

PLAN VIEW

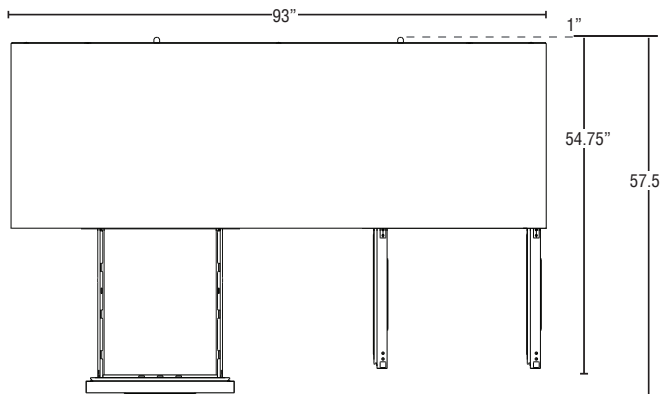

ULR93B-D2

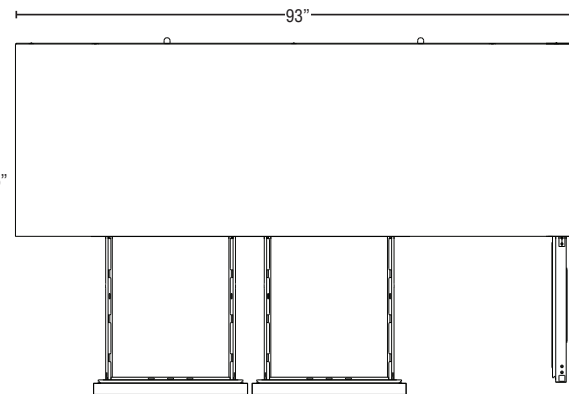

ULR93B-D4

Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with an ABS top. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelves are adjustable in 1/2" increments. Cabinet walls and doors are insulated with 2" of environmentally friendly, CFC free, foamed in place polyurethane. 4" polyolefin, stem casters (two with brakes) are standard.

Door Construction

Doors are constructed of high grade stainless steel exterior with an ABS interior liner and are insulated with 2" CFC free, foamed in place polyurethane. Hoshizaki's exclusive "stepped" design protects the gasket while product is removed from the cabinet. Doors are provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing doors are equipped with a stay open feature past 90° degrees. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Field reversible door hinging is standard.

Drawer Construction

Drawer fronts are constructed of high grade stainless steel with stainless steel interior and are insulated with 2" CFC free, foamed in place polyurethane. Each drawer accommodates (2) 12" x 20" x 6" deep pans (pans by others). Drawer frames are formed of 14 gauge stainless steel all welded construction and securely fastened in the cabinet. The drawer slides are constructed of heavy duty 14 gauge stainless steel and durable acetal rollers with stainless steel ball bearings to prevent metal to metal contact. The drawer slides have a dynamic load capacity of 250 lbs. and have been life tested (fully loaded) three hundred thousand cycles without showing significant wear. The flush mount handles are constructed of extruded aluminum. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning.

Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an "off cycle" defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).