## **DESIGNER LINE DISPLAY REFRIGERATOR**

**Model: D2RNSGDHD** 

Natural Refrigerant R-290 Model



2-Section Display Reach-In Refrigerator with Half Sliding Glass Doors

D2RNSGDHD - Stainless steel front, aluminum end panels and interior D2RNSASGDHD - Stainless steel exterior, aluminum interior D2RNSSSGDHD - Stainless steel exterior and interior



### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Wine rack
Additional epoxy coated steel shelves	Casters
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Pan slide assemblies	

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Location.		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Double-pane, tempered sliding glass doors

Snap in door wipers

Door locks

Self closing doors

Heavy duty, epoxy coated steel shelves

Heavy-duty pilaster strips

Adjustable 6" stainless steel legs

#### **MODEL FEATURES**

LED interior lighting

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Electronic control, off cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.





APPROVAL:

# **Model Specifications**

#### **DIMENSIONAL DATA**

Dimensional Divini	
Net Capacity (cubic feet)	50 (1270 I)
Width, Overall (inches)	52 (1321 mm)
Depth, Overall (inches) (including grill)	34 ( mm)
Depth (inches) (less grill)	32 (813 mm)
Clear Door Width (inches)	17 ¾ (451 mm)
Clear Half Door Height (inches)	26 % (683 mm)
Height, Overall (inches) (including 6" legs)	83 ½ (2115 mm)
Number of Doors	4
Number of Shelves	8
Shelf Area (square feet)	40.8 (3.8 sq m)
Tray Slide Capacity (per half section)	11

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/3	
Capacity (BTU per hour)*	2940	

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	6.33 (3.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu I)
Weight Std - Crated (pounds)	510 (232 kg)
Weight SS - Crated (pounds)	580 (264 kg)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Due to our continued efforts in developing

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

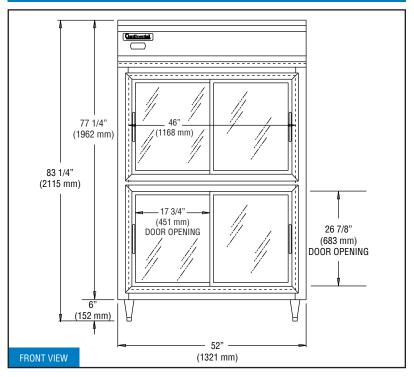

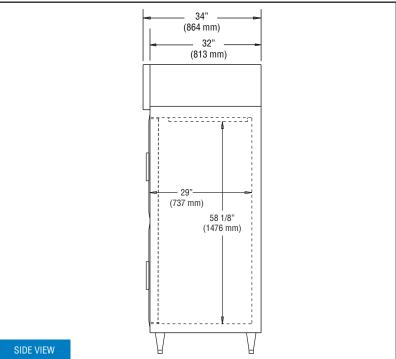

**IMPORTANT NOTE**: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.