

Reach-in Refrigerators

SOLID DOORS REFRIGERATORS
GLASS DOORS REFRIGERATORS



The Asber ARR H / ARR series reach-in refrigerators are engineered to be the cornerstone of any commercial kitchen, offering unparalleled durability, hygiene, and efficiency. These units feature a robust stainless-steel exterior on the front and sides, complemented by a galvanized back, making them ideal for the demanding restaurant environment. The interior is crafted entirely from stainless steel, providing the most rugged construction while ensuring easy cleaning. The coved corner floors meet NSF standards, elevating the unit's sanitation capabilities and setting a new benchmark in food safety.

Insulation plays a crucial role in the thermal efficiency of these refrigerators. Asber exclusively uses the world-renowned "Ecomate™" insulation, known for its superior Global Warming Potential (GWP) and Ozone Depletion Potential (ODP) ratings. At 2-3/8" thick (ARR H series) and 2" (ARR series), this insulation delivers the highest R-value efficiency, ensuring optimal temperature control in various kitchen environments.

Designed with the operator in mind, these reach-ins feature ergonomically designed full-length door handles suitable for various user heights. The in-step interior design creates a superior seal, effectively preventing sweating. The magnetic one-piece door gasket can be removed without tools, simplifying cleaning and replacement procedures.

Asber's commitment to eco-friendly innovation is evident in their use of R290 Hydrocarbon refrigerant. This advanced refrigerant meets the DOE's Energy Conservation standards while minimizing environmental impact with its low global warming contribution (ODP-0, GWP-3).

For enhanced visibility and energy efficiency, the "G" models feature double-pane, hinged glass doors with argon gas insulation. This specialized design prevents heat transfer, minimizes condensation, and provides a frost-free viewing environment, making it easier for staff to locate items without unnecessary door openings.

ADDITIONAL FEATURES TO INCLUDE

- Doors lock with universal key.
- Hermetic compressors with epoxy coated evaporator.
- Field reversible doors on solid single door units.
- Automatic evaporator: paper fins not utilized in the evaporation process.
- Electronic controller with digital display.
- Temperature: 32 °F to 38 °F based on an external environment of 100°F and 65% RH.
- Standard with 2-1/2" castors (17 ft³ models) or 5" castors (37 ft³ models), front with brakes.
- LED lighting in both solid and glass door units for clear visibility.
- NSF-7 certified, meeting stringent food safety standards.



ARR-23-H



ARR-37-2G-H




ARR-72-H

MODEL	DOORS	SHELVES	CAPACITY ft ³	VOLTS - FREQUENCY	POWER HP	AMP	EXTERIOR DIMENSIONS (in)			SHIPPING	
							Width	Depth	Height	Lbs	ft ³
SOLID DOORS REFRIGERATORS											
ARR-17	1	3	17.0	115V. - 60 Hz.	1/4	2.5	27-1/2	26-3/4	77-1/8	271	45.9
ARR-23-H	1	3	23.0	115V. - 60 Hz.	1/4	2.5	27-1/2	31-1/8	84-3/4	293	56.5
ARR-37-H	2	6	37.0	115V. - 60 Hz.	1/3	3.2	43-1/2	32-1/4	84	437	74.2
ARR-49-H	2	6	49.0	115V. - 60 Hz.	1/3	3.2	55-3/8	31-1/8	84-3/4	459	105.9
ARR-72-H	3	9	72.0	115V. - 60 Hz.	2 x 1/3	7.5	82-5/8	32-1/4	84-3/4	664	134.2
GLASS DOORS REFRIGERATORS											
ARR-23-1G-H	1	3	23.0	115V. - 60 Hz.	1/4	2.5	27-1/2	31-1/8	84-3/4	293	56.5
ARR-37-2G-H	2	6	37.0	115V. - 60 Hz.	1/3	3.2	43-1/2	32-1/4	84	437	74.2
ARR-49-2G-H	2	6	49.0	115V. - 60 Hz.	1/3	3.2	55-3/8	31-1/8	84-3/4	459	105.9
ARR-72-3G-H	3	9	72.0	115V. - 60 Hz.	2 x 1/3	7.5	82-5/8	32-1/4	84-3/4	664	134.2

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.

Reach-in Refrigerators

SOLID DOORS REFRIGERATORS
GLASS DOORS REFRIGERATOR

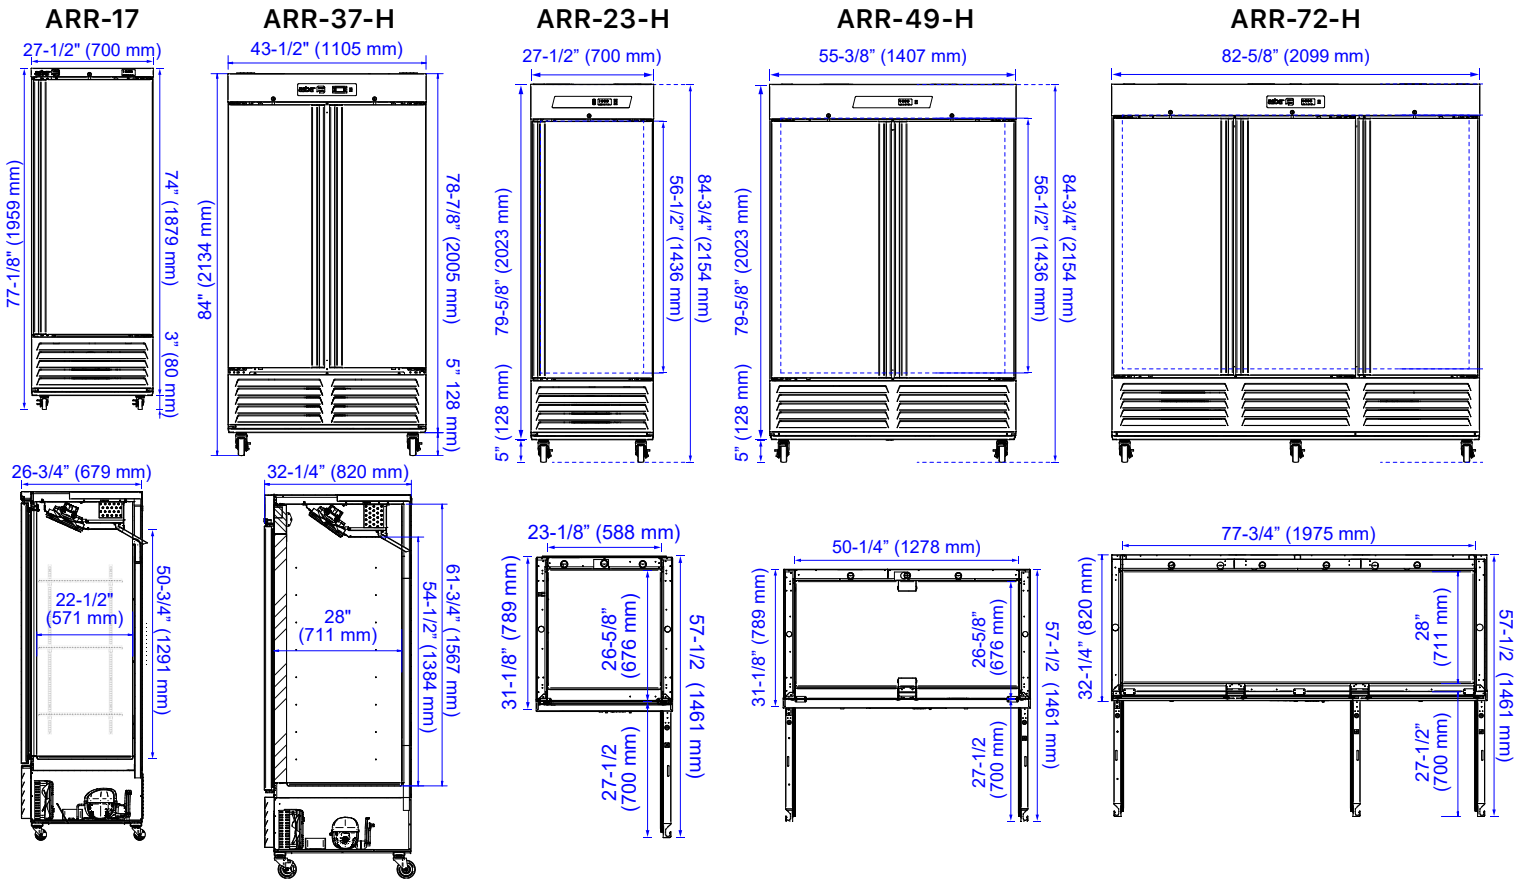

MODEL	ARR-17	ARR-23-H	ARR-37-H	ARR-49-H	ARR-72-H	
ELECTRICAL DATA						
Volts - Frequency	115V. - 60 Hz.					
Power (HP)	1/4		1/3		2 x 1/3	
Full Amp Load	2.5		3.2		7.5	
Plug Type	NEMA 5-15P					
Chord Length (ft)	94-1/2					
Refrigerant	R290					
INTERIOR DIMENSIONS (in)						
Width	23-1/8		39-1/2	50-3/8	77-3/4	
Depth	22-1/2	26-5/8	28	26-5/8	28	
Height	50-7/8	56-1/2	54-1/2	56-1/2	54-1/2	
Shelf (in)	22-1/2 x 20-1/8	23-5/8 x 22-1/2	25-3/8 x 19-1/4	23-5/8 x 22-1/2	24-1/4 x 24-1/4	27-3/8 x 24-1/4
SHIPPING DIMENSIONS (in)						
Width	32		44-1/2	59-7/8	82-7/8	
Depth	31-5/8	36	33-1/8	36	33-1/8	
Height	80-3/4	85-3/8	85-5/8		85-3/8	



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.