



CSD-2HDR-BAL-HC
CSD-4HDR-BAL-HC
Model# CSD-6HDR-BAL-HC

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Reach-In Half-Door Refrigerators



FEATURES LIST

CSD-2HDR-BAL-HC, CSD-4HDR-BAL-HC CSD-6HDR-BAL-HC

- CFC free refrigerant and foam with self contained capillary tube system
- Electronic thermostat and digital LED temperature display for accurate control
- Temperature Range: 28°F to 50°F
- Environmentally friendly R290
- Self-closing doors that remain open past 90°
- Magnetic gasket can be replaced without a tool
- Door Locks & LED Interior Lighting
- Larger fan motors and blades for more efficient airflow for fast recovery times
- Four casters, two front locking
- Adjustable heavy duty epoxy coated wire shelves
- Condensate heating element built into condensate pan to evaporate excess and expel freon heat
- Easy slide out compressor housing for service
- Bottom mount raises the floor for ease of adding and removing product
- Zero clearance sides, 2" rear clearance
- WARRANTY: 2 years parts and labor and additional 3 years for compressor

*Not suitable for installation in a non-commercial or residential applications.

Certified To ANSI/
NSF 7 Standards



As continued product improvement is a policy,
specifications are subject to change without notice


Approvals

PLAN VIEW



CSD-2HDR-BAL-HC



CSD-4HDR-BAL-HC

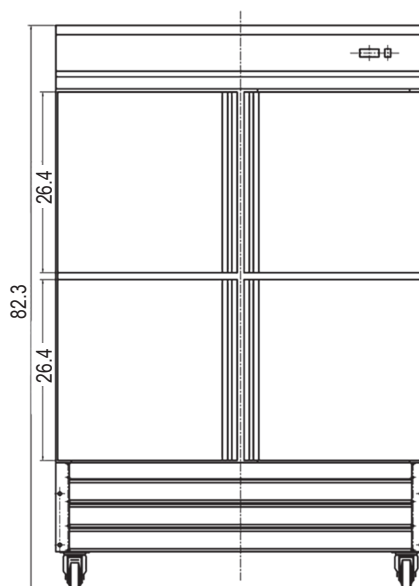

CSD-6HDR-BAL-HC

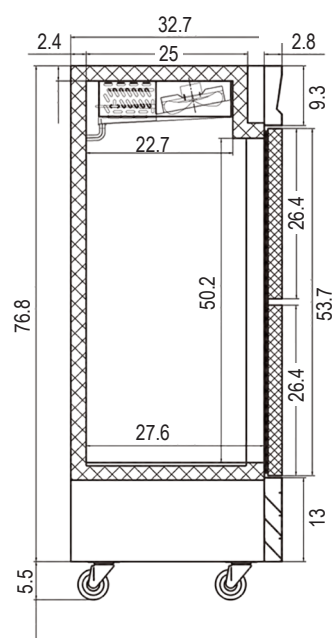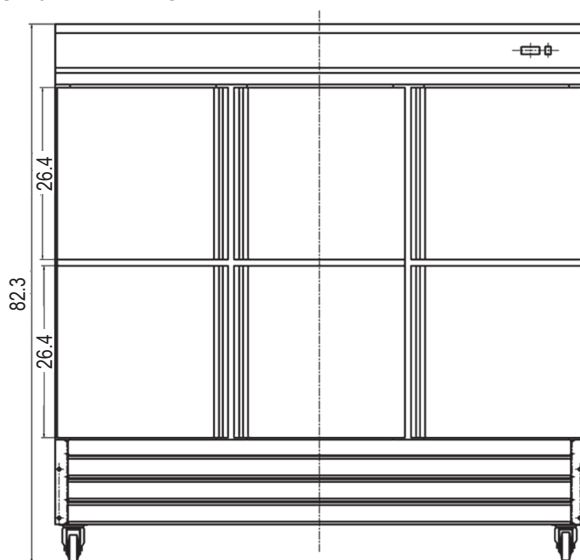

Model	Doors	Shelves	Shelf Sizes	Cabinet Dim (in)			HP	Voltage	Amp	NEMA Plug	Cord Lgth(ft)	Crated Weight (lbs)
				W	D	H						
CSD-2HDR-BAL-HC	2	3	24.3/ 21.6	26.8	32.7	82.3	1/8	115/60/1	6.0	5-15P	8.2	306
CSD-4HDR-BAL-HC	4	6	24.3/ 21.6	53.9	32.7	82.3	1/2	115/60/1	9.0	5-15P	8.2	489
CSD-6HDR-BAL-HC	6	9	24.3/ 31.6	81.0	32.7	82.3	3/4	115/60/1	10.0	5-15P	8.2	668