

ICB TWIN TF 1.5 Gal PE, 120/240V SST

Height: 34.0" Width: 22.6" Depth: 23.3"
(86.4cm) (57.4cm) (59.2cm)



- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- Multiple recipes from one footprint --- with six brew buttons and three batch sizes
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54200.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots
- Optional BUNNlink® remote monitoring support (kit required)

 Server(s) sold separately

Agency:



Specifications

Product #: 54200.0101

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Funnel: Smart Funnel

Faucet: Lower

Legs: 4" Satin Nickel Legs

Additional Features

Hot Water Button

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60


*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.00

CAD Drawings


2D	Revit	KLC
●	●	●

 **WARNING:** This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
04/07/2023

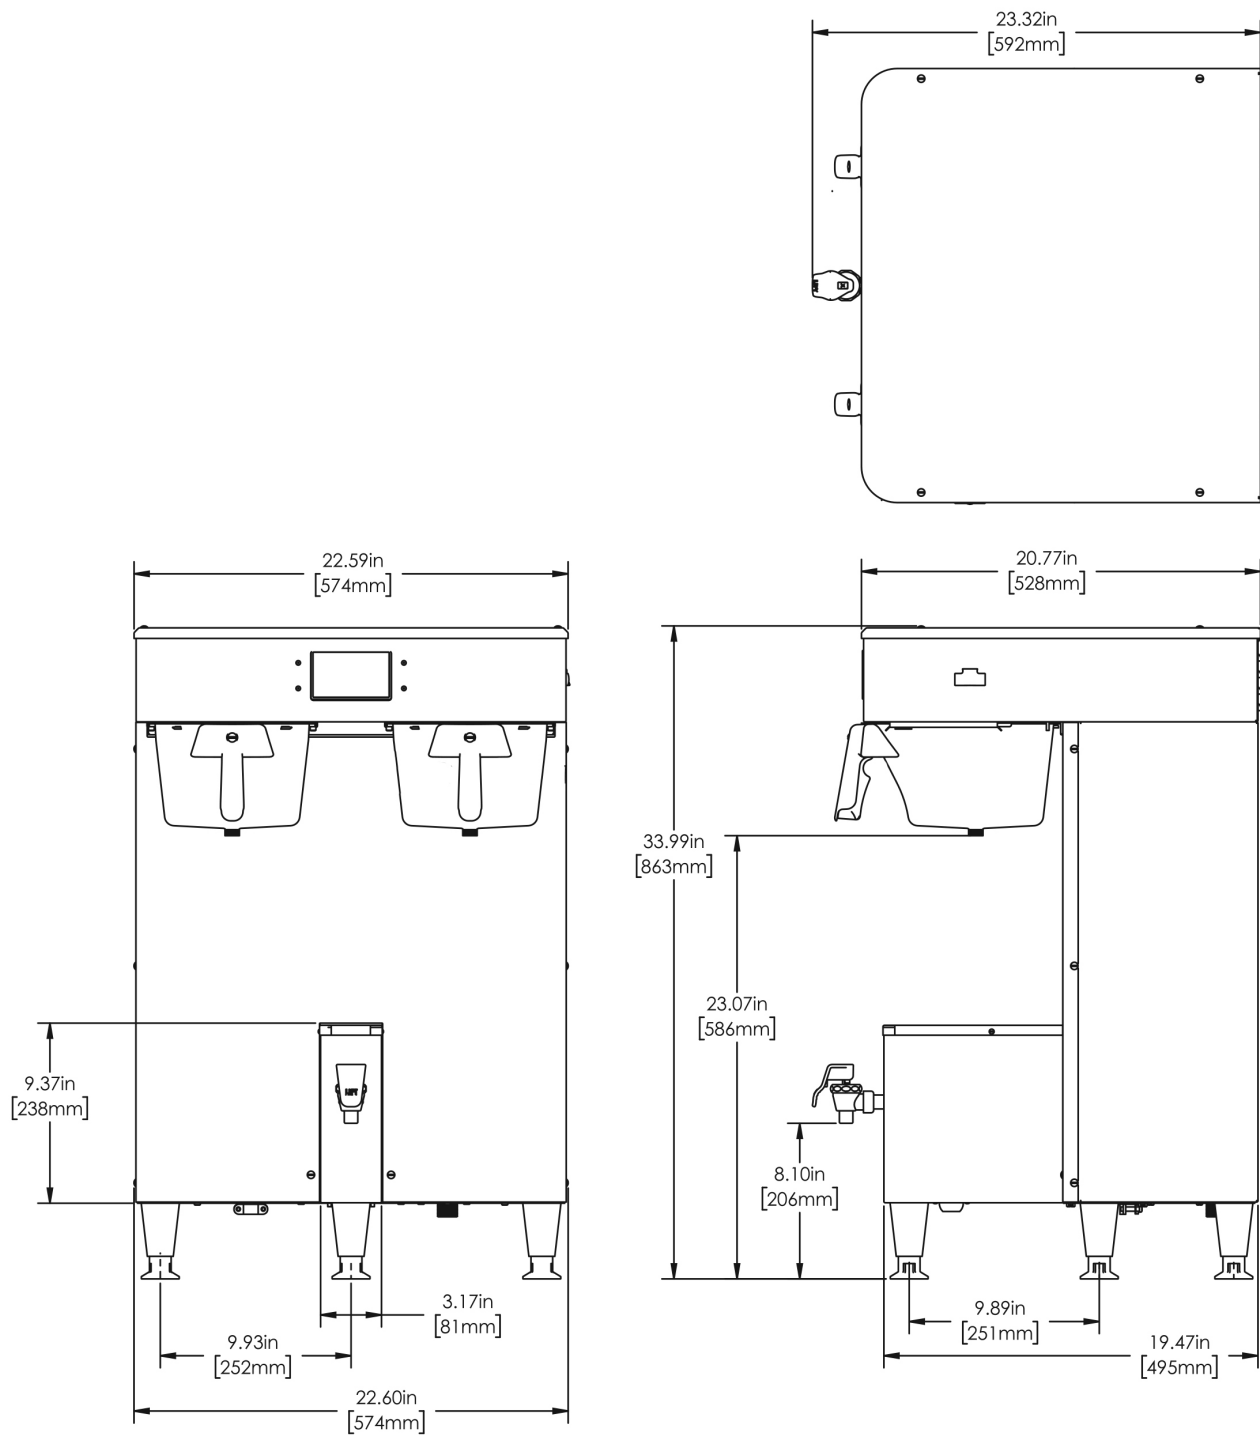

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	34.0 in.	22.6 in.	23.3 in.	30.8 in.	25.8 in.	26.7 in.	87.600 lbs	12.259 ft³
Metric	86.4 cm	57.4 cm	59.2 cm	78.1 cm	65.6 cm	67.8 cm	39.735 kgs	0.347 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
04/07/2023

Related Products & Accessories:ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)

 <p>FILTERS, GOURMET 500 500/1 50/CL</p> <p>Product #: 20138.1000</p>	 <p>WATER FILTER, EQHP-10L</p> <p>Product #: 39000.0001</p>	 <p>WATER FILTER, EQHP-10</p> <p>Product #: 39000.0004</p>	 <p>NON-LOCKING STAND ASSY, TF SERVER GEN3</p> <p>Product #: 39795.0200</p>	 <p>STAND ASSY KIT, TF SERVER</p> <p>Product #: 54473.1000</p>
 <p>FUNNEL ASSY, SST INFUSION COFFEE</p> <p>Product #: 54675.0001</p>	 <p>SYSTEM, WQ-55(2)5L</p> <p>Product #: 56000.0001</p>	 <p>SYSTEM, WQ-55(2)5</p> <p>Product #: 56000.0004</p>	 <p>SYSTEM, WEQ-10(1.5)5L</p> <p>Product #: 56000.0024</p>	 <p>SYSTEM, WEQ-10(1.5)5</p> <p>Product #: 56000.0027</p>
 <p>CARTRIDGE, WQ-55(2)5L</p> <p>Product #: 56000.0101</p>	 <p>CARTRIDGE, WQ-55(2)5</p> <p>Product #: 56000.0104</p>	 <p>CARTRIDGE, WEQ-10 (1.5)5L</p> <p>Product #: 56000.0121</p>	 <p>CARTRIDGE, WEQ-10 (1.5)5</p> <p>Product #: 56000.0122</p>	

Serving & Holding Options: ICB TWIN TF 1.5 Gal PE, 120/240V SST(54200.0101)

 <p>TF SERVER, 1G DSG GEN3</p> <p>Product #:42700.0200</p>	 <p>TF SERVER, 1G DSG GEN3 NOBASE</p> <p>Product #:42700.0250</p>	 <p>TF SERVER, 1.5G DSG GEN3</p> <p>Product #:42750.0200</p>	 <p>TF SERVER, 1.5G DSG GEN3 NOBASE</p> <p>Product #:42750.0250</p>	 <p>TF SERVER, 1G MECH GEN3</p> <p>Product #:44000.0200</p>
 <p>TF SERVER, 1G MECH GEN3 NOBASE</p> <p>Product #:44000.0250</p>	 <p>TF SERVER, 1.5G MECH GEN3</p> <p>Product #:44050.0200</p>	 <p>TF SERVER, 1.5G MECH NOBASE GEN3</p> <p>Product #:44050.0250</p>		