

GMGV4
GMGV6
GMGV8
GMGV12
51"L x 43"D x 51-5/8"H
75-3/8"L x 43"D x 51-5/8"H
99-3/4"L x 43"D x 51-5/8"H
148-1/2"L x 43"D x 51-5/8"H

Included

- Remote DX refrigeration
- Gravity coil
- · LED top light
- One year parts & labor warranty
- Stainless steel rear exterior
- Vertical, UV bonded lift-up front glass w/o lock
- Warmest average product temperature of 40°F or less



Specify	Standard Features	Additional Options						
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)						
		Powder coated (stock/non-stock colors)						
		Powder coated Silversan Black						
		Stainless steel						
INTERIOR COLOR	Stainless steel interior							
LOWER FRONT PANEL COLOR	Powder coated Silversan Black	Powder coated (stock/non-stock colors)						
		Stainless steel						
BASE SUPPORT	Rail system for shims (remote)							
BUMPER FRONT	1" Boston bumper (specify color)	1" Stainless steel plate rail bumper						
DISPLAY	Wire rack deck	lce pans, requires floor drain						
END PANELS	Full w/stainless steel mirror interior	Cutaway w/glass						
		None (specify per line-up)						
SCALE STAND	None	¹ • Scale stand w/ receptacle & CAT5 (specify location)						
		Scale stand w/ receptacle (specify location)						
REAR DOORS	Clear glass rear sliding doors	Reflective glass rear sliding doors						
LIGHTS	LED 4000K w/ frosted lens							
ELECTRICAL CONNECTION	Electrical leads (remote)							
REFRIGERATION	¹ • Remote DX refrigeration	² • Remote w/thermostat, solenoid & TXV						
SENSOR	• None	CPC discharge air sensor (remote)						
MISCELLANEOUS		Front glass lock						
		Rear door lock						
ACCESSORIES		Drain strainer						
		Rear wrapping board, white Sanalite®						
	Std Notes: 1 - Read important notes for	Ontion Notes: 1 - Separate circuit required						

Std Notes: 1 - Read important notes for remote options

Option Notes: 1 - Separate circuit required


2 - Read important notes for remote options

Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intend	ed Environment: Type	e I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system inform	se in system information below.				
Zone	Intended Product To Be D	isplayed	Warmest Avg Prod Temp ° F				
1	Unpackaged refrigerated	products	38				

PLAN VIEW SIDE VIEW

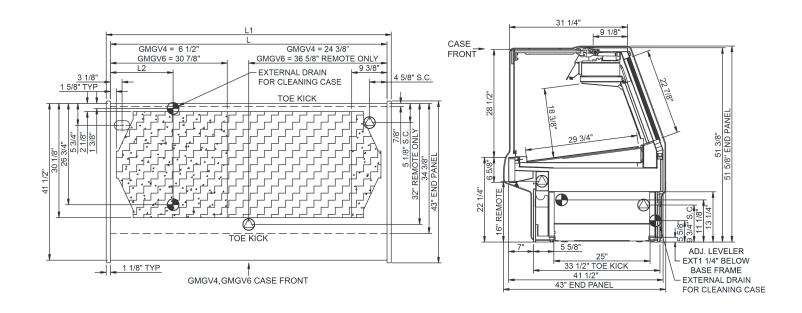

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

REFRIGERATION LINE CONNECTION. REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts				Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
GMGV4	48.75	51.00	13.38	Remote Blower (DX)	Circuit #1	110-120	1	60	1.79	63	2+G	Leads Multiple	20.00	1274	1180	1,200
				Remote Gravity (DX)	Circuit #1	110-120	1	60	1.48	22	2+G	Leads Multiple	20.00	1274	1180	
GMGV6	73.13	75.38	16.63	Remote Blower (DX)	Circuit #1	110-120	1	60	2.10	108	2+G	Leads Multiple	20.00	1793	1660	1,400
				Remote Gravity (DX)	Circuit #1	110-120	1	60	1.48	47	2+G	Leads Multiple	20.00	1793	1660	[
GMGV8	97.50	99.75	35.63	Remote Blower (DX)	Circuit #1	110-120	1	60	3.42	156	2+G	Leads Multiple	20.00	2333	2160	
				Remote Blower (DX)	Circuit #1	110-120	1	60	1.40	42	2+G	Leads Multiple	20.00	2333	2160	
				Remote Blower (R744 TRAN	Circuit #1	110-120	1	60	2.72	114	2+G	Leads Multiple		2333	2160	
GMGV12	146.25	148.50	57.88	Remote Blower (DX)	Circuit #1	110-120	1	60	4.43	268	2+G	Leads Multiple	20.00	3828	3544	2,100
				Remote Blower (R744 TRAN	Circuit #1	110-120	1	60	3.73	171	2+G	Leads Multiple		3828	3544	[
				Remote Gravity (DX)	Circuit #1	110-120	1	60	1.40	21	2+G	Leads Multiple	20.00	3828	3544	

*** Does not include electric defrost on freezer models.

Regulatory Approvals: Accordance with AHRI Std 1200 All Models ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7



AHRI Std 1200

DOE 2017

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) 45" minimum door entry clearance required (without shipping skid).
- 4) Units must be shimmed during installation to ensure the unit is level and plumb.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.