



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

Italian Glass 34" H Refrigerated Display Case

Ideal for both Bakery & Deli Merchandising

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITR4834-B18
Shown with optional laminate

OPTIONAL ACCESSORIES

- ☐ Special Base Laminates
- ☐ Condensate Pump for self-contained cases
- ☐ Condensate pan for remote cases
- ☐ Cord & Plug (SC models only)
- ☐ Stainless Steel Shelving
- ☐ Reflective Ends
- ☐ 4"/102mm Casters
- ☐ Recessed Casters
- ☐ 6"/152mm Legs With or Without Skirt
- ☐ Rear Wrap board
- ☐ Remote Condensing Unit (EEV Included)
- ☐ Joining Kit for Continuous Line-Ups
- ☐ Reflective Rear Doors
- ☐ Front Air Intake & Discharge

MODEL

DIMENSIONS

(Includes End Panels)

☐ ITR3634-B18	36 x 30.75 x 52 (in) 914 x 781 x 1321 (mm)
☐ ITR4834-B18	48 x 30.75 x 52 (in) 1219 x 781 x 1321 (mm)
☐ ITR6034-B18	60 x 30.75 x 52 (in) 1524 x 781 x 1321 (mm)

STANDARD FEATURES

Model Features

- Powder coated steel base construction with a choice of six standard laminates
- Stainless steel interior
- All tempered thermo-pane glass construction
- Tilt out front glass for easy cleaning
- Removable sliding glass rear doors
- Adjustable Leg Levelers
- Rear air intake and discharge.

Refrigeration

- Electronic temperature control with demand defrost
- PTC Condensate evaporator provided for a totally self-contained system.
- Condensate pump standard with remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- R290 Refrigerant

Shelving

- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions (0°/5° angle) 34" (864mm)
- Three tiers of shelves

Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant



Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.

AIA #

SIS #

Italian Glass 34" H Refrigerated Display Case

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Unpackaged Refrigerated Products / All Foods & Beverages	38 °F / (3.3 °C)


DIMENSION: xx"/(mm)

SYMBOL KEY:

Ⓜ ELECTRICAL JUNCTION BOX
(SUPPLIED W/6" LEADS OR POWER CORD)

□ TUB DRAIN LOCATION

Ⓡ REMOTE REFRIGERATION
LINE CONNECTION

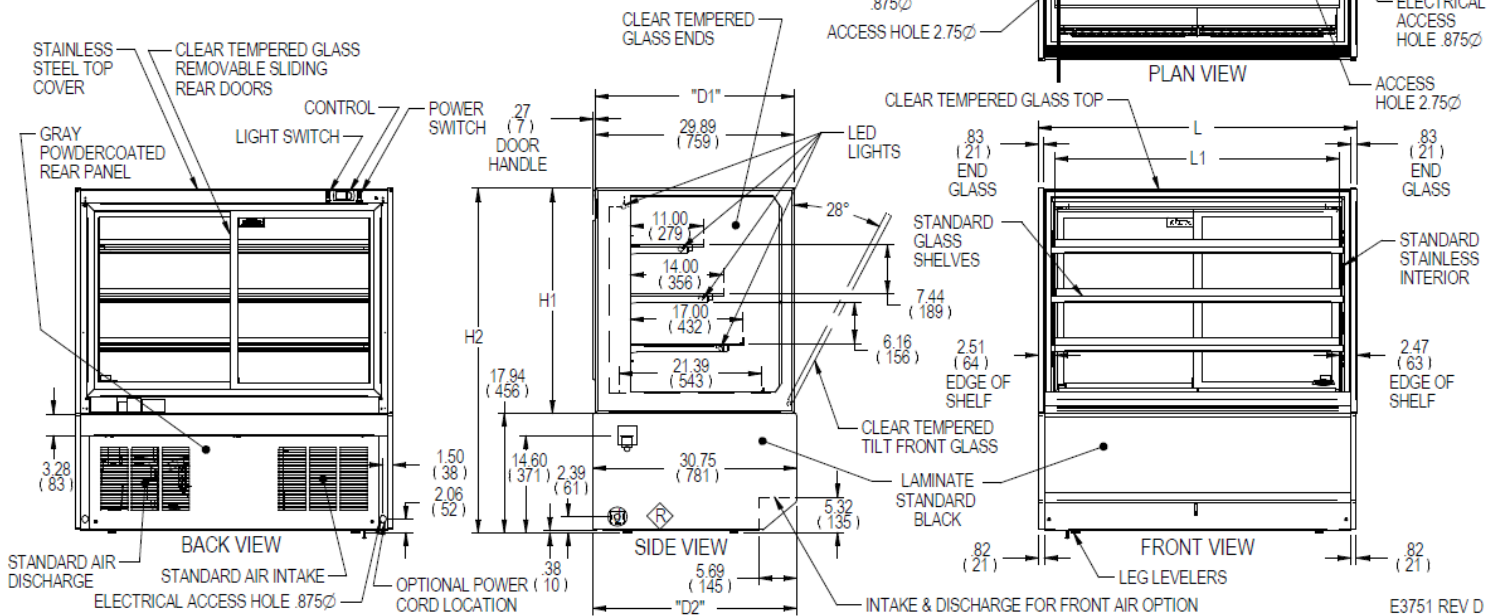

MODEL	DIMENSION					SHELVING					DISPLAY AREA SQ IN	INTERIOR VOLUME CU FT	SELF CONTAINED						REMOTE				
	L	D1	D2	H1	H2	# OF TIERS	DT	DM	DB	L1			PERMANENT CONNECT 2-WIRE + GROUND 120/60/1		OPTIONAL NEMA CORD & PLUG 2-WIRE + GROUND 120/60/1	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT 2-WIRE + GROUND 120/60/1		REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT
	in	in	in	in	in		in	in	in	in			AMPS	MAX FUSE SIZE	KILO			AMPS	MAX FUSE SIZE	KILO			
	mm	mm	mm	mm	mm		mm	mm	mm	mm													
ITR3634-B18	36.00	30.00	30.75	34.00	52.00	3	11	14	17	30.88	1980 SQ	15.5 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	650 LBS	3.0	15	R449a	CONDENSATE PUMP	610 LBS
	914	762	781	864	1321		279	356	432	784	IN						295 KILO					277 KILO	
ITR4834-B18	48.00	30.00	30.75	34.00	52.00	3	11	14	17	42.88	2720 SQ	21 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	800 LBS	3.0	15	R449a	CONDENSATE PUMP	750 LBS
	1219	762	781	864	1321		279	356	432	1089	IN						363 KILO					340 KILO	
ITR6034-B18	60.00	30.00	30.75	34.00	52.00	3	11	14	17	54.88	3470 SQ	26 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	930 LBS	3.3	15	R449a	CONDENSATE PUMP	880 LBS
	1524	762	781	864	1321		279	356	432	1394	IN						422 KILO					399 KILO	

- Refrigerated cases are designed to operate in a maximum of 80°F (27°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Packaged food products placed in case must be pre-chilled before placing in case.



FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com