


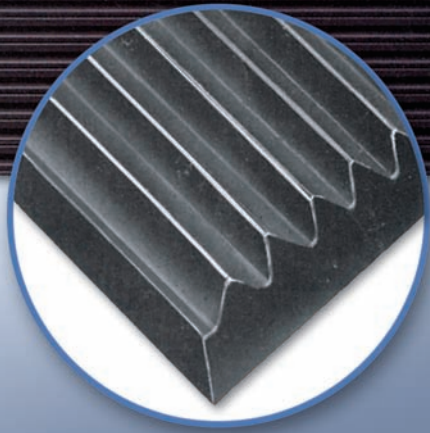

SWITCHBOARD

TYPE 1050

CORRUGATED
SWITCHBOARD

Black

1050 A.S.T.M. CORRUGATED SWITCHBOARD

- ❖ Protection against electrical shock around high voltage apparatus
- ❖ Conforms to OSHA requirements & tested to ASTM D-178 Type II Class II
- ❖ Meets all optional requirements for Ozone, Flame and Oil resistance
- ❖ Proof Tested at 20,000 VAC
- ❖ Dielectric Test Voltage – 30,000 VAC
- ❖ Maximum use voltage 17,000 VAC

1050 CORRUGATED SWITCHBOARD: 1/4" thick

Size	Estimated Weight
36" x 75 ft	390 lbs

Also available
in Special Cuts.

Protect
Your
Personnel



SWITCHBOARD

TYPE 1052

SMOOTH TOP
SWITCHBOARD

Black

Blue

1052 SMOOTH TOP SWITCHBOARD

- ❖ Meets requirements for Mil-DTL-15562G, Type II
- ❖ Flame and Abrasion Resistant
- ❖ Insulating for High Voltage Application Not Exceeding 3,000 volts
- ❖ Durable Smooth Vinyl
- ❖ Easy to Clean Smooth Surface

1052 SMOOTH TOP SWITCHBOARD: 1/8" thick

Size	Estimated Weight
36" x 75 ft	245 lbs

Also available
in Special Cuts.