





4004503 Conforms to NSF/ANSI STD 7 and UL STD 471 Certified to CSA STD C22.2 No. 120



Capable of storing specialty cocktail ice

Standard Features

- Self-contained
- · Stainless steel interior
- Locking door(s)
- · LED interior lighting
- Two defrost cycles
- Automatic condensate evaporator
- · Heated cabinet front to minimize condensation
- · Three adjustable, coated-wire shelves

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Frosters, One Zone, Front Serviced, Low Profile

F1FL

F1FL32, F1FL36



Configurable Options

Refrigeration Compartment Location:

Left or Right

Refrigeration Compartment Cover Finish:

- · Black vinyl-clad
- · Stainless steel
- · Jeweled stainless
- Laminated
- Unlaminated

Door Style & Finish:

- Black vinyl-clad
- Stainless steel
- · Jeweled stainless
- Laminated
- Unlaminated
- · Glass, black vinyl-clad
- · Glass, stainless steel
- Glass, jeweled stainless
- · Glass, laminated

Door Hinge Location

Left or Right

Door Handle:

- Signature
- Pull-tab
- Tube

Top Style:

- · No finished top
- Stainless top
- Drainboard top

Left and Right Side Finish:

- · Black vinyl-clad
- · Stainless steel

Back Finish:

- · Galvanized steel
- · Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Frosters - One Zone, Front Serviced, Low Profile

Specifications

		F1FL32	F1FL36
Dimensions	Length	32"	36"
	Number of Sections	1	1
	Door Opening	16"	20"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required	
	Full Load Amps	6.5	
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment	
Refrigeration	Refrigerant	R290 refrigerant - 130 grams, 4.59 oz, 0.29 pounds	
	Compressor	Reciprocating, 1/3 HP, 1300 BTUH, 0.11 Tons	
Refr	Heat Rejection	2660 BTUH	
Operating Range		12°F (-11°C) to 35°F (2°C)	
Plumbing		Automatic condensate evaporator. No drain connection required †	
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door	

Materials

- · Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- · Galvanized steel parts include: back and bottom

Refrigeration

- Fin & tube evaporator with forced air circulation
- Equipped with manual fast freeze mode that accelerates the freezing process and automatically reverts back to the normal operating mode



• Optional drainboard top 1/2" ID drain line stubs out beneath the compressor compartment; field connection required

† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.


Capacities


	F1FL32	F1FL36
10 oz. Mugs	90	126
6" High Pint Glasses	72	90

Frosters - One Zone, Front Serviced, Low Profile

Drawings

PLAN VIEWS






SIDE VIEWS

F1FL32




F1FL36




FRONT VIEWS

F1FL32

F1FL36

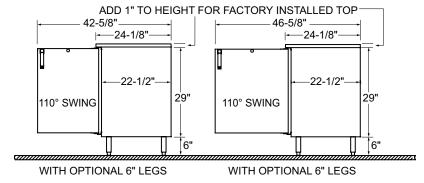

STANDARD CABINET



OPTIONAL LEGS AND CASTERS









