

REACH-IN FREEZER (0°F)

Model: 2FNPT

Natural Refrigerant R-290 Model

2-Section Pass-Thru Freezer

2FNPT - Stainless steel front, aluminum end panels and interior
 2FNPA-PT - Stainless steel exterior, aluminum interior
 2FNSS-PT - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Additional epoxy coated steel shelves	Hinged glass doors (consult factory)
Chrome or stainless steel shelves	Half door(s)
Wine rack	Rehinging of doors (consult factory)
Pan slide assemblies	Correctional Facility Options
Adjustable legs	<ul style="list-style-type: none"> One way security screws
Custom laminates	<ul style="list-style-type: none"> Locking hasp (lock not included)
Special electrical requirements (consult factory)	<ul style="list-style-type: none"> Stainless steel mesh cover Coverless hinges

Consult factory for other model configurations, options and accessories.



Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated “plug” refrigeration system
 Natural, environmentally safe, high efficiency R-290 refrigerant¹
 Refrigeration system is readily accessible on top of cabinet, separate from the “food zone”
 Automatic, hot gas condensate evaporator
 Expansion valve system

CABINET ARCHITECTURE

3” non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Self-closing doors
 Magnetic snap in Santoprene™ door gaskets
 Cylinder lock in each door
 Heavy duty, epoxy coated steel shelves
 Heavy duty pilaster strips
 5” casters

MODEL FEATURES

LED interior lighting
 Electronic control, automatic electric defrost
 Top and side air distribution ducts
 Cabinet upper side panels and refrigeration “plug” system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	48 (1359 l)
Width, Overall (inches)	52 (1321 mm)
Depth, Overall (inches) (including handles)	38 ¾ (984 mm)
Depth [less doors] (inches)	32 (813 mm)
Depth [doors open 90°] (inches)	79 (2007 mm)
Clear Door Width (inches)	19 ⅜ (492 mm)
Clear Door Height (inches)	58 ⅝ (1489 mm)
Height, Overall (inches) (including 5" casters)	82 ¼ (2089 mm)
Number of Doors	4
Number of Shelves	6
Shelf Area (square feet)	40.8 (3.8 sq m)
Tray Slide Capacity (per section) (2" centers)	24

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
R-290 Refrigerant Charge (oz)	4.6
Capacity (BTU per hour)*	2600

ELECTRICAL DATA



Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	8.1 (4.1)
Defrost Amps (International)	5.3 (2.6)
10 ft. Cord/Plug (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	530 (240 kg)
Weight SS - Crated (pounds)	635 (288 kg)

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

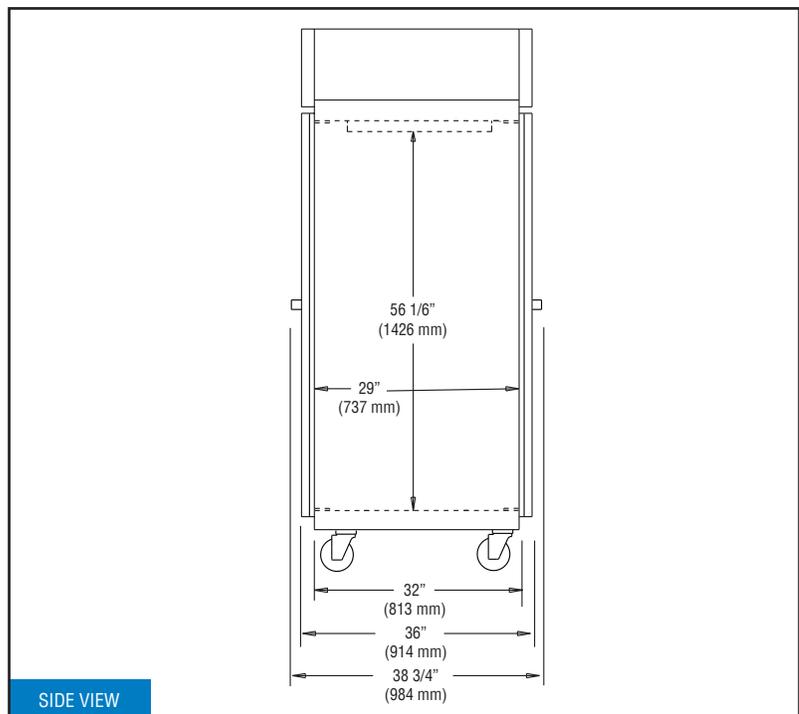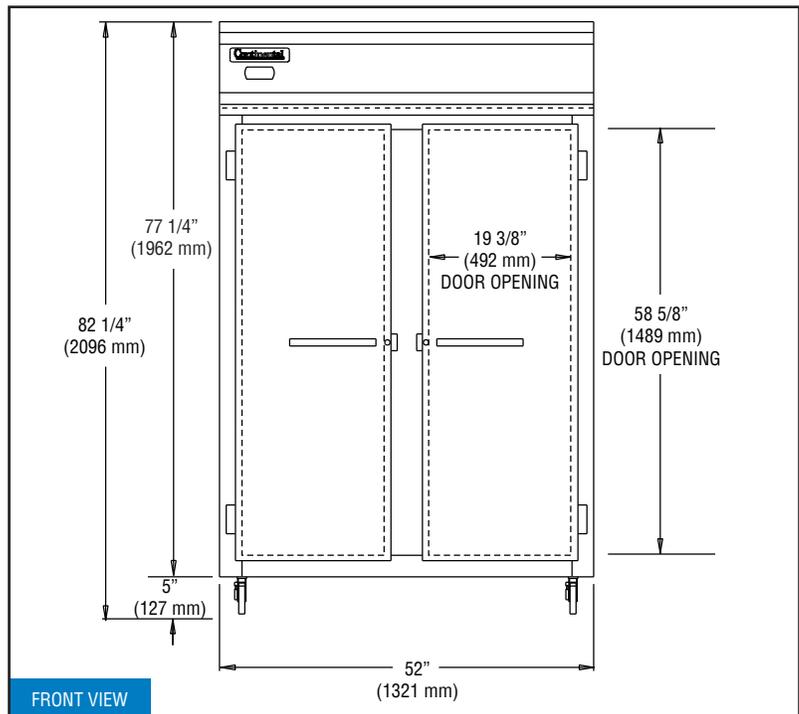

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



Equipped with one NEMA-5-15P Plug
(varies by country)

REVISED: 12/23/25