

• FSIB4R 50-7/8"L x 61-1/8"D x 53-7/8"H • FSIB8R 98-1/8"L x 61-1/8"D x 53-7/8"H

Included

- Remote DX refrigeration
- Digital fahrenheit thermometer
- One year parts & labor warranty
- · Open reach-in front
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Warmest average product temperature of 40°F or less




Specify	Standard Features	Additional Options					
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)					
		Stainless steel					
INTERIOR COLOR	Powder coated Silversan Black	Stainless steel					
LOWER FRONT PANEL COLOR	Powder coated SCC Standard	Stainless steel					
	Silversan Black (FDA compliant)						
BASE SUPPORT	Levelers						
BUMPER END	None	• 1" Boston bumper (2 levels)					
		1" Stainless steel tube bumper (2 levels)					
BUMPER FRONT	None	• 1" Boston bumper (2 levels)					
		1" Stainless steel tube bumper (2 levels)					
END PANELS	Full w/stainless steel mirror interior	Cutaway w/glass					
		None (specify per line-up)					
INTERIOR DISPLAY	Angled deck						
ELECTRICAL CONNECTION	Electrical leads (remote)						
REFRIGERATION	¹ • Remote DX refrigeration						
SENSOR	• None	CPC discharge air sensor (remote)					
MISCELLANEOUS		Bumper front/ends					

Std Notes: 1 - Read important notes for remote options

Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intend	ed Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information of 75°F with 55% relative humidity unless noted otherwise in system information.	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.								
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F								
1	Packaged / unpackaged refrigerated products	40								

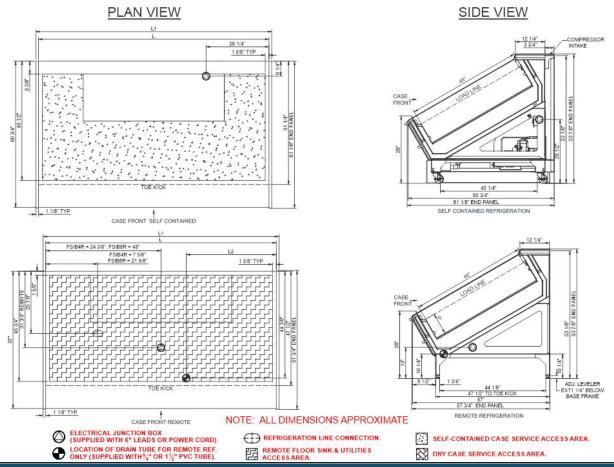

Model Technical Specifications																
									Amps					Conv. Rack	Para. Rack	Est
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	***	Watts	Wires	NEMA Plug	SST	BTUH	BTUH	Wt
FSIB4R	48.63	50.88	24.38	Remote (R404A)	Circuit #1	110-120	1	60	0.80	64	2+G	Leads Single	20.00	3110	2880	N/A
FSIB8R	95.88	98.13	37.50	Remote (R404A)	Circuit #1	110-120	1	60	1.60	128	2+G	Leads Single	20.00	8078	7480	N/A
*** 5		—														

** Does not include electric defrost on freezer models.

Regulatory Approvals:

els Accordance with AHRI Std 1200

ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF/ANSI 7





DOE 2017 Energy Efficiency

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) 60" Minimum door entry clearance required (Without shipping skid) for Remote unit & 64" for Self-Contained.
- 4) Remote units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

21921458