

Restaurant Open Cabinet

SO18 | SO24 | SO36



SO24

Venâncio Professional **Open Cabinets** were developed to meet the diverse needs of everyday life in the kitchen, combined with a high standard of quality and durability, seeking to meet the needs of a professional kitchen.

STANDARD FEATURE

- Available in widths of 18" (458 mm), 24" (610 mm) and 36" (915 mm).
- Two cabinet models are available. SO - Open Cabinet (no doors), and SD - Cabinet with doors.
- Fully welded structure in stainless steel.
- Stainless steel bottom, front and sides.
- 6" (152 mm) highly polished chrome adjustable steel legs.


AREA FOR CONSULTANT / CONTRACTOR:

OPTIONS & ACCESSORIES

- ☐ Product installation kit.
- ☐ (4) 6" swivel casters with front locking brakes.
- ☐ Joining Kit.

Restaurant Open Cabinet

SO18 | SO24 | SO36

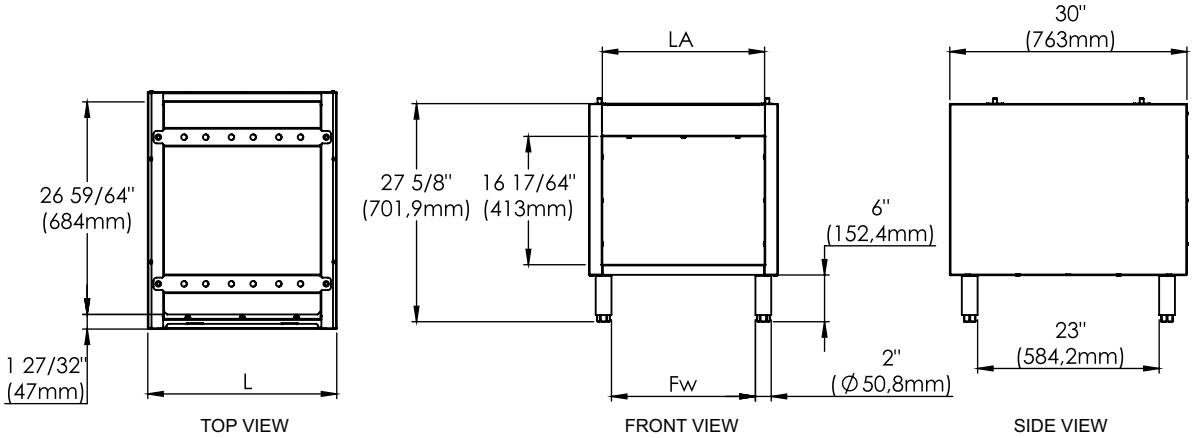

Models	Product interior dimensions			Exterior Product Dimensions & Weight				Shipping Crate Dimension & Weight			
	Opening Width (LA)	Depth	Height	Width (L)	Depth	Fw	Weight	Width	Depth	Height	Weight
SO18	14 73/128" (370 mm)	37 37/128" (747 mm)	19 11/64" (487 mm)	18" (458 mm)	30 43/64" (779 mm)	12 13/64" (310 mm)	73 lb (33 kg)	22 57/128" (570 mm)	34 83/128" (880 mm)	33 55/64" (860 mm)	97 lb (44 kg)
SO24	20 71/128" (522 mm)			24" (610 mm)		18 29/128" (463 mm)	84 lb (38 kg)	28 45/128" (720 mm)			110 lb (50 kg)
SO36	32 9/16" (827 mm)			36" (915 mm)		30 15/64" (768 mm)	104 lb (47 kg)	40 21/128" (1.020 mm)			137 lb (62 kg)

UTILITY INFORMATION

ASSEMBLY COMBINATION					
MODELS	CHARBROILER	GRIDDLE MANUAL	GRIDDLE THERMOSTATIC	RANGE	NEUTRAL MODULE
SO18	X	X	X		X
SO24	X	X	X	X	X
SO36	X	X	X	X	X

CLEARANCES REQUIREMENTS

- Combustible and non-combustible surfaces: There is no need for distance on the sides and rear.
- See spacing requirements for table products installed on the easel.

MISCELANEOUS

- Install under countertop product Venâncio Professional.
- Before performing the installation, consult the manual.
- Intended for commercial use only. Not for household use.