• NE3613DSV 35-3/4"L x 33"D x 13-5/8"H • NE4813DSV 47-3/4"L x 33"D x 13-5/8"H

Included

- NOTE: Glass warranty only applicable to first point of delivery
- LED top light
- NOTE: Overall case height is 32-7/8" (includes below counter)
- One piece formed ABS plastic tub
- One year parts & labor warranty
- Vertical, fixed front & side UV bonded frameless glass




Specify	Standard Features	Additional Options			
FRAME EXTERIOR COLOR	Powder coated Silversan Black	Powder coated (stock/non-stock colors)			
		Stainless steel			
INTERIOR COLOR	Powder coated Silversan Black	NOTE: Interior color must be FDA & NSF approved			
		 Powder coated (stock colors, specify RAL#) 			
		Stainless steel			
BASE SUPPORT	Adjustable, locking casters	• 6"H legs			
LEFT END GLASS	Glass end	No end glass			
RIGHT END GLASS	Glass end No end glass				
REAR DOORS	Clear glass rear sliding doors	Reflective glass rear sliding doors			
LIGHTS	LED 3500K w/ frosted lens	LED 3000K w/ frosted lens			
		LED 4000K w/ frosted lens			
ELECTRICAL CONNECTION	6' Straight blade power cord	6' Locking blade power cord			
		Electrical leads (non-refrigerated)			
REAR NON-VENTED PANEL	None	Note: Same as Rear Vented Panel without vents			
		 Powder coated (stock/non-stock colors) 			
		Stainless steel			
MISCELLANEOUS		Rear door lock			
		Second year parts & labor warranty			

Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.					
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp °	F		
1	Unpackaged non-refrigerated products	Ambient			

PLAN VIEW SIDE VIEW

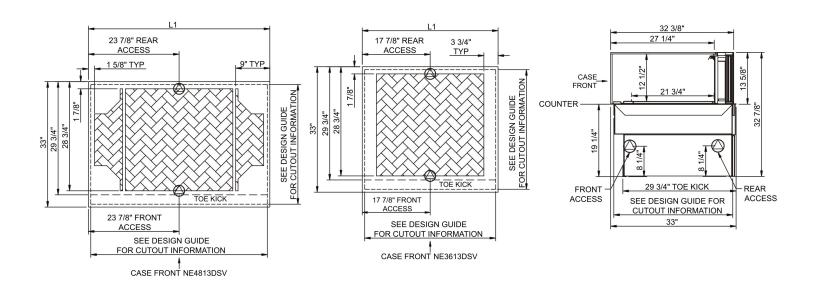

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). ONLY (SUPPLIED WITH 1/4" OR 11/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
NE3613DSV	N/A	35.75	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	4	2+G	5-15P or L5-15P	N/A	N/A	N/A	600
NE4813DSV	N/A	47.75	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	6	2+G	5-15P or L5-15P	N/A	N/A	N/A	700

*** Does not include electric defrost on freezer models.

Regulatory Approvals:					
All Models	ETL Listed to UL 65				
	ETL Sanitation to NSF/ANSI 2				
		DOE 2017 Energy Efficiency Compliant			



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 19.25" minimum space required beneath counter surface.
- 3) Glass warranty only applicable to first point of delivery.

MARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

21869120