



Job _____ Item No. _____

Dual Temperature NSF-7 Hot & Refrigerated Cold Pans

- HRCP-7100 HRCP-7200 HRCP-7300
- HRCP-7400 HRCP-7500



Model HRCP-7200

DESCRIPTION

Wells Dual Temperature Hot & Refrigerated Drop-In Cold Pans are two units in one; from a heated Bain Marie to a refrigerated cold pan with the flip of a switch. All models are completely self-contained in one to six-well models are CFC free and are recessed 3" to comply with NSF-7 performance requirements.

SPECIFICATIONS

Exterior – One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.

Interior – CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning. Ledge is recessed 3" to comply with NSF-7 requirements, allowing a layer of air to insulate food and for pan support.

Refrigeration – Air cooled, type R-513A CFC free refrigerant systems featuring wrapped coil construction on both sides and bottom. Condensing unit may be easily removed for service. Larger compressors speed refrigeration.

Heating - Automatic water-fill with high-limit protection featuring a water sensor and solenoid valve to maintain proper water levels. And efficient electric immersion heating system transfers heat directly to the water while a positive off thermostat controls provides adjustable and consistent temperatures. Designed for wet operation only.

STANDARD FEATURES

- NSF-7 compliant with 3" recessed top edge
- Self-contained drop-in design
- Hold standard 12" by 20" food pans and fractional sized pans
- Stainless steel top and liner for maximum strength and durability
- 1" drains for ease of cleaning
- Single control for changing from hot to cold operation.
- Easy access temperature & function control panel attached to a 24" long flexible conduit for optional counter mounting
- Type R-513A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation keeps food cold while saving energy
- Recessed ledge for pan support and colder, fresher products
- Quick & easy service with sight glass, service valves, filter/dryer and receiver
- Adapter bars provided for food pans
- Limited 1 year parts & labor warranty

OPTIONS & ACCESSORIES

- Perforated bottom strainer plate conveniently holds ice above drain to prevent clogging
- Adapter bars for fractional sized pans
- Remote models without compressors or condensing units
- 2nd year parts & labor warranty
- 5-year compressor warranty

CERTIFICATIONS




WELLS MANUFACTURING INTERNATIONAL INC.
265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com

Printed in the U.S.A. 2M-Z25091 REV D (02-26)
Specifications are subject to change without notice
and are not intended for installation purposes.




Dual Temperature NSF-7 Hot & Refrigerated Cold Pans

□HRCP-7100 □HRCP-7200 □HRCP-7300
□HRCP-7400 □HRCP-7500

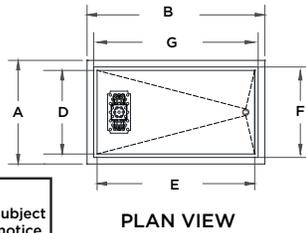

PLAN VIEW




PAN DIVIDER
TWO INCLUDED

COUNTER CUTOUT
45 1/4" X 25 7/8"


HRCP-7300 Shown

NOTE: RAILS ARE SHIPPED
AS FOUR (4) SEPARATE
PIECES-NOT WELDED

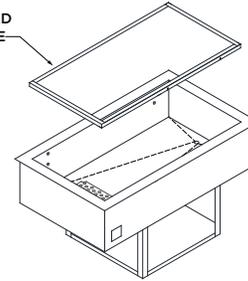


ISOMETRIC VIEW


Note:
Specifications are subject
to change without notice
and are not intended for
installation purposes.
See installation
instructions prior to
installing unit.

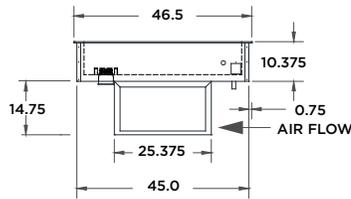

FRONT ELEVATION
(OPERATOR SIDE)



SIDE ELEVATION



CONTROL PANEL
REFER TO
INSTALLATION
INSTRUCTIONS FOR
MOUNTING

SK3252 REV - (12-24)

SPECIFICATIONS								SHIPPING INFORMATION						
MODEL	OVERALL DIMENSIONS			INTERIOR DIMENSIONS		CUT OUT DIMENSIONS		WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	F Front to Back Inches (MM)	G Left to Right Inches (MM)	SHIPPING WEIGHT POUNDS (KG)	INSTALLED WEIGHT POUNDS (KG)	WIDTH Inches (MM)	DEPTH Inches (MM)	HEIGHT Inches (MM)	CUBIC FEET	CUBIC METERS
HRCP-7100	27-1/8 (689)	19-1/8 (468)	25-1/8 (638)	21-7/8 (555)	13-7/8 (352)	25-7/8 (657)	17-7/8 (451)	175 (80)	150 (69)	21 (533)	29 (737)	32 (813)	11.3	0.31
HRCP-7200	27-1/8 (689)	32-3/4 (832)	25-1/8 (638)	21-7/8 (555)	27-1/2 (699)	25-7/8 (657)	31-1/2 (800)	220 (100)	190 (87)	29 (737)	34 (864)	32 (813)	18.3	0.52
HRCP-7300	27-1/8 (689)	46-1/2 (1530)	25-1/8 (638)	21-7/8 (555)	41-1/4 (1048)	25-7/8 (657)	45-1/4 (1149)	240 (109)	210 (96)	29 (737)	48 (1219)	32 (813)	25.8	0.73
HRCP-7400	27-1/8 (689)	60-1/4 (1530)	25-1/8 (638)	21-7/8 (555)	55 (1397)	25-7/8 (657)	59 (1499)	275 (125)	240 (109)	29 (737)	62 (1575)	32 (813)	33.3	0.94
HRCP-7500	27-1/8 (689)	74 (1880)	25-1/8 (638)	21-7/8 (555)	68-3/4 (1747)	25-7/8 (657)	72-3/4 (1847)	298 (136)	255 (116)	29 (737)	76 (1930)	32 (813)	41.0	1.16

POWER SUPPLY INFORMATION											
MODEL	WARMER				REFRIGERATION					SINGLE PHASE SUPPLY 3-WIRE 120/208-240V	
	VOLTS	KW	AMPS		VOLTS	HP	AMPS		REFRIGERANT TYPE	L1-L2 208-240V	L2-N 120V 60HZ
			L1-L2	N			L2-N	L1			
HRCP-7100	208	1.9	9.0	N.A.	115	1/5	4	N.A.	R-513A	ALL MODELS PERMANENTLY CONNECTED	
	240	2.5	10.4	N.A.							
HRCP-7200	208	1.9	9.0	N.A.	115	1/4	5	N.A.	R-513A		
	240	2.5	10.4	N.A.							
HRCP-7300	208	3.0	14.4	N.A.	115	1/4	5	N.A.	R-513A		
	240	4.0	16.7	N.A.							
HRCP-7400	208	3.8	18.1	N.A.	115	1/4	5	N.A.	R-513A		
	240	5.0	20.8	N.A.							
HRCP-7500	208	6.0	28.9	N.A.	115	1/3	8	N.A.	R-513A		
	240	8.0	33.3	N.A.							

All HRCP models feature automatic water fill systems and require a water supply connection. Please refer to the operator's manual and installation instructions for details.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



WELLS MANUFACTURING INTERNATIONAL INC.
265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264 7827 • www.wells-mfg.com

Printed in the U.S.A. 2M-Z25091 REV D (02-26)
Specifications are subject to change without notice
and are not intended for installation purposes.