


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Slide Top Coolers

<b>ST</b>	ST24, ST36, ST48, ST60, ST72, ST96
-----------	------------------------------------

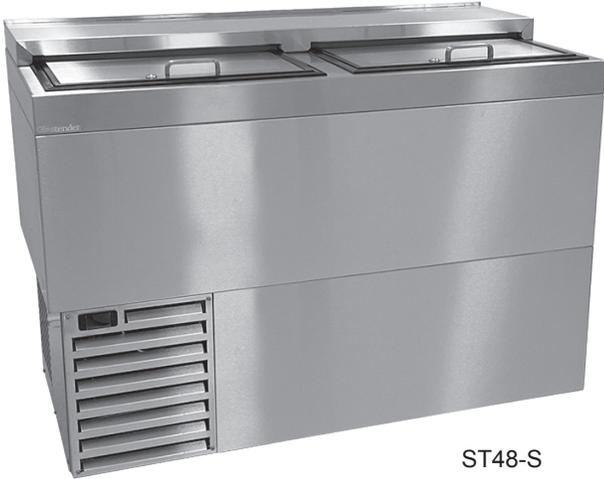

ST48-S

### Configurable Options

- Finish:**
- Black vinyl-clad steel with galvanized steel back
  - Stainless steel front, sides, and back
- Legs:**
- 6"
- Casters:**
- 4-1/8"
  - 2-7/8"
  - 1-1/2"



4004503  
 Conforms to NSF/ANSI STD 7 and UL STD 471  
 Certified to CSA STD C22.2 No. 120  
 Meets NSF 7 requirements for closed container products

EP 5016978  
 Energy Performance Verified / Rendement Énergétique Vérifié

### Standard Features

- Self-contained refrigeration
- All stainless steel interior with radius corners for easy cleaning
- One-piece integral top and mullion design
- Easy to plan exterior dimensions: 24" front to back and 24", 36", 48", 60", 72", or 96" left to right
- Automatic defrost cycle
- Automatic condensate evaporator - no drain connection required
- Door lock(s)

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

# Slide Top Coolers

## Specifications

		ST24	ST36	ST48	ST60	ST72	ST96
Dimensions	Length	24"	36"	48"	60"	72"	96"
	Number of Doors	1	1	2	2	3	4
	Door Opening	n/a	n/a	n/a	n/a	n/a	n/a
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required					
	Full Load Amps	4.5					
	Plug Type	9 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*					
Refrigeration	Refrigerant	R290 - 125 grams, 4.41 oz., 0.28 pounds					
	Compressor	Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons					
	Heat Rejection	1840 BTUH					
Operating Range		34°F (1°C) to 40°F (4°C)					
Plumbing		Interior floor drain and condensate drain to automatic evaporator. No drain connection required †					
Vertical Wire Partitions		1	2	3	4	4	5

### Materials

- Stainless steel parts include: top, door, interior and optional legs. Also, front, sides and back on 'S' models
- Black vinyl-clad steel parts include: front and sides on 'B' models
- Galvanized steel parts include: base on all models and exterior back on 'B' models




† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

## Capacities

	ST24	ST36	ST48	ST60	ST72	ST96
Bottles	144	226	330	478	610	826
Cases	6.0	9.4	13.8	19.9	25.4	34.4

# Slide Top Coolers


## Drawings

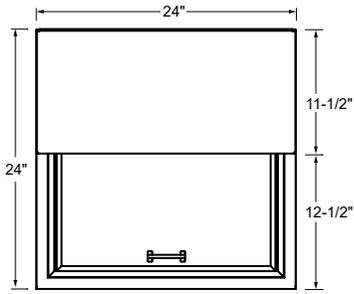


PLAN VIEW

ST24\*

\*ALL MODELS SHOWN WITH OPTIONAL 6" LEGS

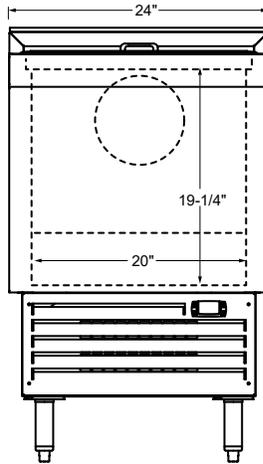


FRONT ELEVATION

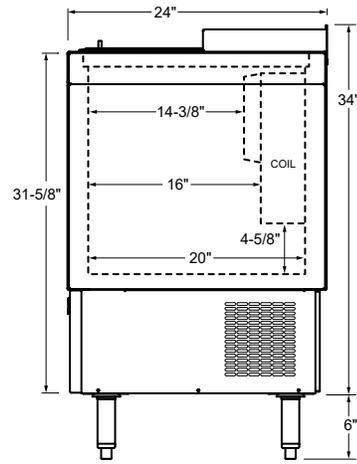

SIDE ELEVATION


PLAN VIEW

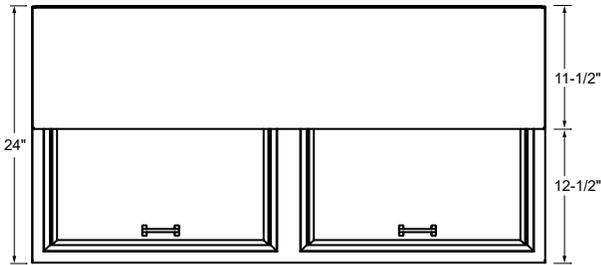

FRONT ELEVATION


Model	A	B	No. of Doors
ST36	36"	19-1/8"	1 Large
ST48	48"	31-1/8"	2 Standard
ST60	60"	43-1/8"	1 Large, 1 Standard
ST72	72"	55-1/8"	3 Standard
ST96	96"	79-1/8"	4 Standard

ST36\*, ST48\*, ST60\*, ST72\*, ST96\*

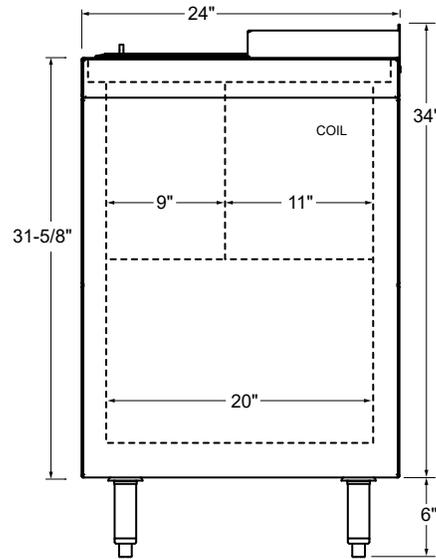

SIDE ELEVATION

### OPTIONAL LEGS AND CASTERS

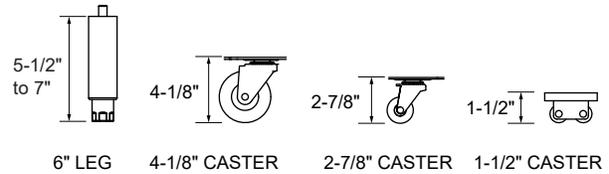

5400 N Michigan Rd • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
 www.glastender.com

Printed in USA