



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

AIA #

Item #: _____

Model #: _____ Qty: _____

SIS #

Approval: _____

Italian Glass Refrigerated Self-Serve 43" H Display Case (Drop-In)

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITRSS3634 Shown
*Counter Not Provided

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> ITRSS3626	36 x 33 x 42.7 (in) 914 x 838 x 1085 (mm)
<input type="checkbox"/> ITRSS4826	48 x 33 x 42.7 (in) 1219 x 838 x 1085 (mm)
<input type="checkbox"/> ITRSS6026	60 x 33 x 42.7 (in) 1524 x 838 x 1085 (mm)

STANDARD FEATURES

Model Features

- Stainless steel interior
- All tempered thermo-pane glass construction
- Removable sliding glass rear doors

Refrigeration

- Electronic temperature control with on demand defrost
- PTC Condensate evaporator provided for a totally self-contained system
- Condensate pump standard on remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- Proper ventilation of counter is required for
- Rear air intake and discharge
- Energy saving Night Curtain
- R290 Refrigerant

Shelving

- Tempered glass shelves
- Adjustable up and down and can be tilted in two positions (0°/ 5° angle).
- Two tiers of shelves

Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant

OPTIONAL ACCESSORIES

- Stainless Steel Exterior
 - Condensate Pump (SC Models Only)
 - Condensate Pan (Remote Models)
 - Cord & Plug (SC Models Only)
 - Stainless Steel Shelving
 - Reflective End Glass
 - Reflective Glass Rear Sliding Door
- Front Air Intake & Discharge
 - Remote Condensing Unit (R449a Refrigerant, EEV Included)
 - Joining Kit for Continuous Line Ups



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.


AIA #	<h1 style="margin: 0;">Italian Glass Refrigerated Self-Serve 43" H Display Case (Drop-In)</h1>
SIS #	
Product Specifications	

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Packaged refrigerated products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

- SYMBOL KEY:**
- Ⓝ ELECTRICAL JUNCTION BOX (SUPPLIED W/6" LEADS OR POWER CORD)
 - TUB DRAIN LOCATION
 - Ⓡ REMOTE REFRIGERATION LINE CONNECTION

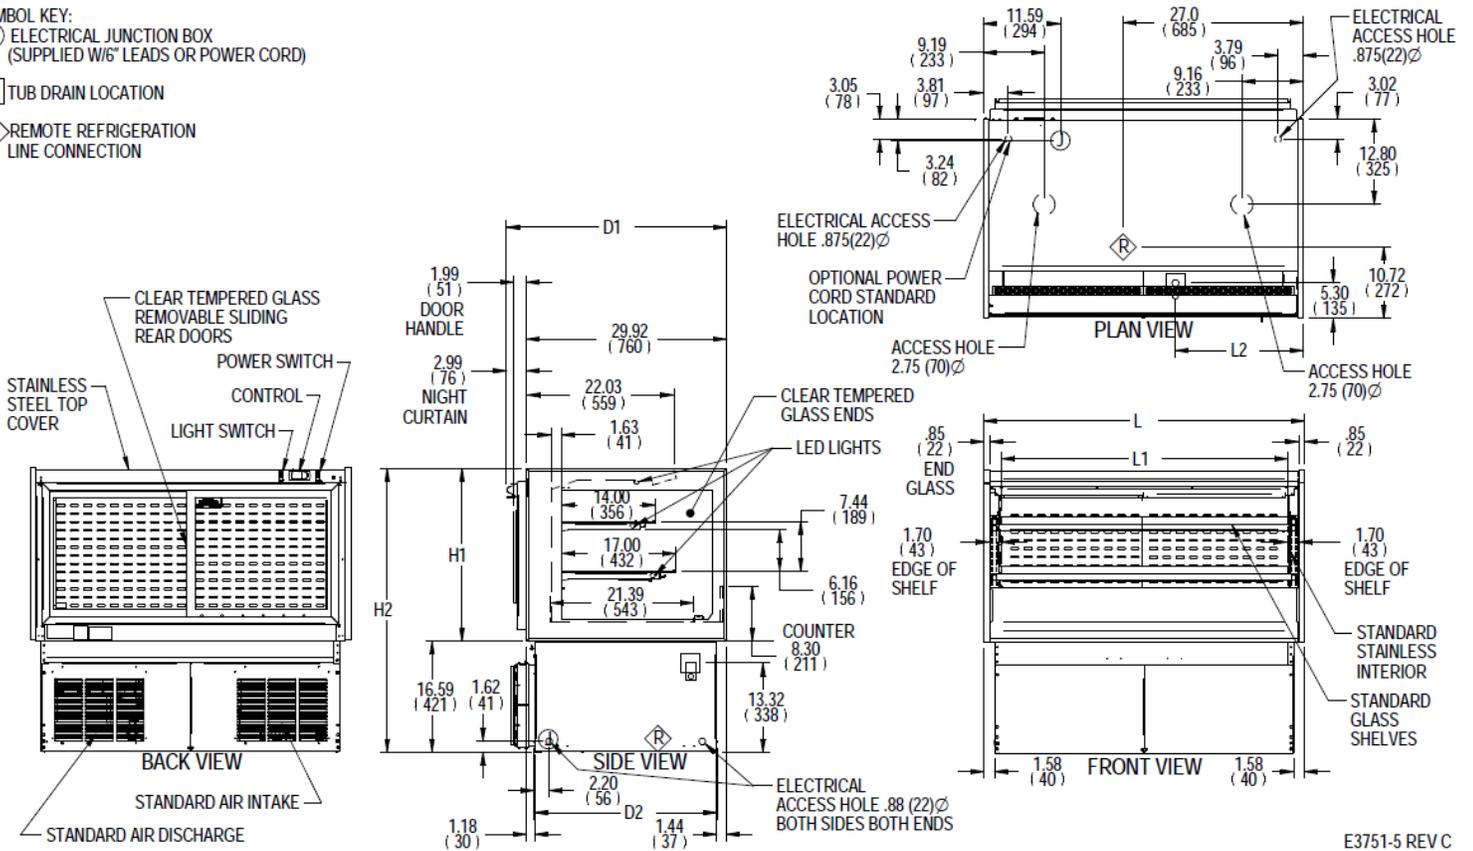

E3751-5 REV C

DIMENSION TOLERANCE +/- 0.19 (4.8)

MODEL	DIMENSION										TUB DRAIN	COUNTER CUT OUT			# OF TIERS	SHELVING			DISPLAY AREA SQ IN	INTERIOR VOLUME CU FT	PERMANENT CONNECT 2-WIRE + GROUND			OPTIONAL NEMA CORD & PLUG	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	REMOTE			
	L	D1	D2	H1	H2	L2	L3	D3	DT	DB		L1	ELECTRICAL	AMPS		MAX FUSE SIZE	2-WIRE + GROUND	REFRIGERANT			CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT 2-WIRE + GROUND					REFRIGERANT	BTU'S @+20°	CONDENSATE REMOVAL	SHIP WEIGHT
	in	in	in	in	in	in	in	in	in	in		in																			
ITRSS3626	36.00	33.00	27.30	26.00	42.70	17.63	33.40	27.70	14	17	30.88	1630	8.0	CU FT	120/60/1	14.0	20	NEMA 5-20	R290	CONDENSATE PAN	537 LBS	3.3	15	R449a	3400	CONDENSATE PUMP	500 LBS				
	914	838	693	660	1085	448	848	704	356	432	784	IN									244 KILO						227 KILO				
ITRSS4826	48.00	33.00	27.30	26.00	42.70	19.13	45.40	27.70	14	17	42.88	2240	10.5	CU FT	120/60/1	14.0	20	NEMA 5-20	R290	CONDENSATE PAN	720 LBS	3.3	15	R449a	3800	CONDENSATE PUMP	670 LBS				
	1219	838	693	660	1085	486	1153	704	356	432	1089	IN									327 KILO						304 KILO				
ITRSS6026	60.00	33.00	27.30	26.00	42.70	19.13	57.40	27.70	14	17	54.88	2850	13.0	CU FT	208-240/60/1	10.0	15	NEMA 6-15	R290	CONDENSATE PAN	800 LBS	3.3	15	R449a	4200	CONDENSATE PUMP	740 LBS				
	1524	838	693	660	1085	486	1458	704	356	432	1394	IN									363 KILO						336 KILO				

- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Counter must have adequate ventilation for proper case performance.
- Packaged food products placed in case must be pre-chilled before placing in case.



FEDERAL INDUSTRIES
 A Standex Company
 215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: Geninfo@Federalind.com
Website: Federalind.com