



Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## UHT SERIES

### Compact Undercounter with Drawers Refrigerator Models/Self-Contained



#### STANDARD PRODUCT FEATURES

- Stainless Steel Exterior Top, Sides & Drawers
- Front Breathing Self-Contained Refrigeration System
- Environmentally Friendly, Low GWP R-290 Refrigerant
- Automatic Non-Electric Condensate Evaporator
- Electronic Control
- Full-Length Drawer Handle with Gasket Guard
- Magnetic Snap-In EZ-Clean™ Drawer Gasket(s)
- Self-Closing Stainless Steel Drawers with Stay-Open Feature
- Heavy Gauge Stainless Steel Drawer with Slide
- 8' (2.4 m) NEMA Cord & Plug Attached
- Set of Four (4) 4" High Casters

#### ACCESSORIES & OPTIONS (\*field installed)

- CK20 four 6" (15.2cm) high casters for 32" models
- CK24 four 3½" (8.9 cm) high casters for 32" models
- CK26 four 2¾" (6.9 cm) high casters for 32" models
- CK28 four 2½" (6.4 cm) high casters for 32" models
- CK29 four 2⅜" (5.56 cm) high casters for 32" models
- LK4 four 6" (15.24 cm) legs for 32" models
- Optional accessory kits shipped separately for field installation

#### FACTORY INSTALLED OPTIONS

Stainless Steel Finished Back (model numbers will have '-SB' suffix)



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

## AVAILABLE CONFIGURATIONS

### 32" Wide Model

#### Model

UHT32-D

#### Style


Two Drawer Refrigerator

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_




MODEL:


UHT32-D

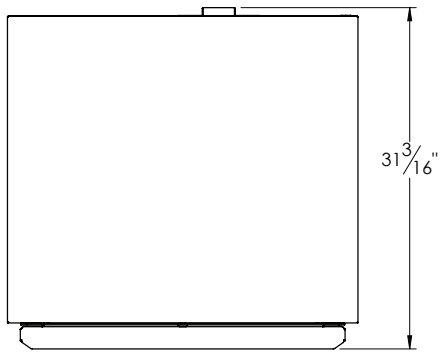

TOP VIEW

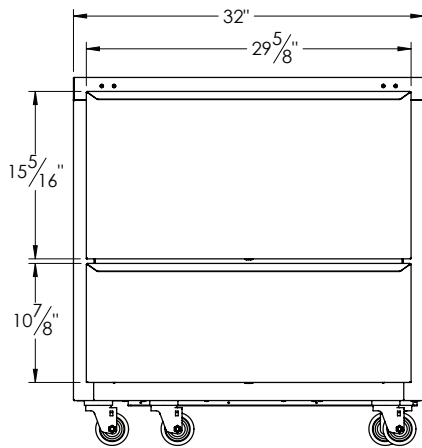

ELEVATION

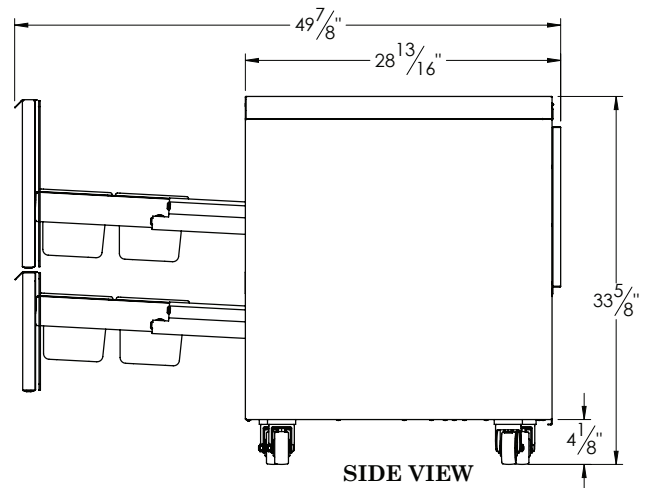

SIDE VIEW



## UHT SERIES

Compact Undercounter with Drawers  
Refrigerator Models/Self-Contained

### MODEL:

UHT32-D

### EQUIPMENT SPECIFICATIONS

MODEL	UHT32-D
DIMENSIONAL DATA	
Net Capacity cu. ft.	7.97 (225 l)
# of 1/6 size pans per drawer	8
# of drawers per cabinet	2
# of 1/6 size pans per cabinet	16
Length - overall in.	32 (81.3 cm)
Depth - overall in.	31 <sup>3</sup> / <sub>16</sub> (79.2 cm)
Depth - drawer open in.	49 <sup>7</sup> / <sub>8</sub> (126.7 cm)
Width drawer in.	29 <sup>5</sup> / <sub>8</sub> (75.2 cm)
Height - overall on 4" casters	33 <sup>3</sup> / <sub>8</sub> (85.4 cm)
ELECTRICAL DATA (NEMA 5-15P attached)	
Voltage   Plug	115/60/1
Full Load Amps   KWH/24HR <sup>1</sup>	7.2   2.31
REFRIGERATION DATA	
Refrigerant	R-290
Refrigerant Amount oz.	3.5 (99 g)
BTU/HR <sup>2</sup>   H.P.	1680   1/8 HP
SHIPPING DATA	
Length - crated in.	45 (114 cm)
Width - crated in.	42 (107 cm)
Height - crated in.	41 (104 cm)
Volume - crated cu. ft.	53 (1501 l)
Weight - crated lbs.	219 (99 kg)

#### NOTES:

1. KWH/24HR = Kilowatt usage per 24 hours
2. Based on a 90°F ambient and 20°F evaporator.

#### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, one piece sides, and drawers are constructed of heavy gauge stainless steel. The cabinet is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

#### REFRIGERATION SYSTEM

A balanced, rear mounted, front breathing, self-contained refrigeration system using environmentally friendly, R290 refrigerant is provided. It features a capillary tube, air cooled hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' (2.4m) NEMA cord and plug is provided. Standard operating temperature for refrigerator is 34° to 38°F (1.1° to 3.3°C).

#### CONTROLLER

An electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

#### DRAWERS

They are constructed using heavy gauge stainless steel drawer slides and 1 5/16" diameter stainless steel rollers. Gasket profile and material simplify cleaning and increase overall gasket life. Drawers include both a self-closing and stay-open feature.

#### DOMESTIC WARRANTY

Both a six year parts and labor warranty and a seven year compressor warranty (self-contained models only) are provided standard.

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug



CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.