

BLACK◆DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 48" Standard Series Charbroiler, 4 Burners, in Stainless Steel

BDECTC-48/NG



Elevate your commercial kitchen with this Black Diamond Gas Charbroiler, designed for high-demand environments. Made with stainless steel and cast iron, it promises longevity and performance. The 48-inch charbroiler features four burners, each providing 30,000 BTUs, perfect for grilling burgers, steaks, and more. With manual ignition and control, it's easy to operate, while cleaning is simplified with removable drip trays and adjustable legs.

FEATURES AND CONSTRUCTION

- Made of durable stainless steel and cast iron for long-lasting use
- Delivers a powerful 120,000 BTUs for efficient cooking
- Features 4 burners for versatile cooking options
- Compact design perfect for countertop placement
- Equipped with 4 adjustable legs for stability
- Includes coupling adaptor and 3/4 inch gas connection for natural gas
- Manual ignition and control type for straightforward operation
- Wide temperature range to suit various cooking needs
- Ideal for steakhouses and barbecue restaurants
- Field convertible to liquid propane for flexible use

3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment
for details at 1-877-672-7740



INCLUDED COMPONENTS

- (4) Adjustable Legs
- (4) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray
- (1) Raised Grill Plate


BLACK♦DIAMOND®

Black Diamond 48" Standard Series Charbroiler, NG

BDECTC-48/NG

FRONT

SIDE

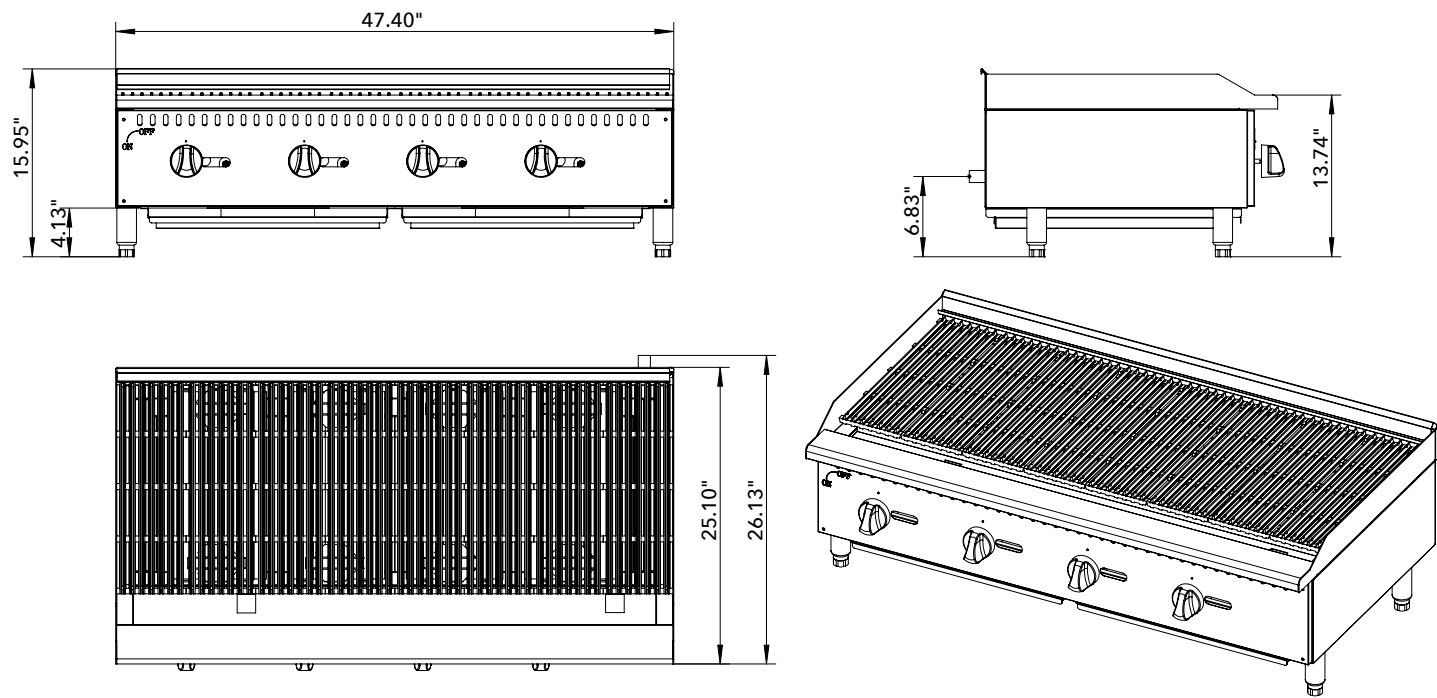

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	30000	4	Cast Iron	2	26.13" x 47.40" x 15.95"	198.5	255.8

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.