### **GARLAND**

## 36E Series Heavy Duty All Purpose Top Range

Project
Item
Quantity
CSI Section 11400
Approved
Date

#### Models

- 36ER32
- · 36ES32
- 36ET32



Model 36ER32 All Purpose Top Range With 2 Sections, 3 heat zones

#### Standard Features

- Stainless steel front and sides
- Stainless steel front rail
- Chrome plated, 4 position removable rack guides w/oven rack
- Electro-mechanical heavy-duty oven thermostat
- 36" (914mm) all purpose work top area controlled by 3 thermostats, 290°/650°F (143°/343°C)
- 3" (76mm) high stainless steel vent raiser
- Heat resistant, cool to touch oven door handle
- 6" (152mm) adjustable chrome plated legs (NSF)
- One Year limited parts & labor (USA & Canada)

# Options & Accessories

- Stainless steel main back (R&S models)
- Extra oven rack
- Swivel casters complete with front brakes (4)
- 6" (152mm) adjustable stainless steel legs
- High voltage 460V
- Marine equipment storm rails for pots, hand rails, oven door latch, drip tray stop and deck fasteners

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

### Specifications

Heavy-duty electric range Model 36ER32 with an all purpose plate top and welded 1/2" (13mm) high raised side lips.

Two top sections (one 12" (305mm) x 24" (610mm) plate & one 24" (610mm) x 24" (610mm) plate).

Full-size oven is controlled by a heavy-duty electromechanical thermostat.

Top has 3 thermostat-controlled heat zones each having a pilot lamp.

Oven interior is 13.5" (343mm) high x 26.25" (667mm) wide x 29" (533mm) deep with removable four-position chrome plated rack guides and one oven rack, front and rear stainless steel grease troughs.

Stainless steel front and sides.

Circuit breakers or fuses provide electric circuit protection.

Available with casters or for dais mount.

Model 36ES32 has storage base in lieu of oven section.


Model 36ET32 has a modular top.







[152mm]

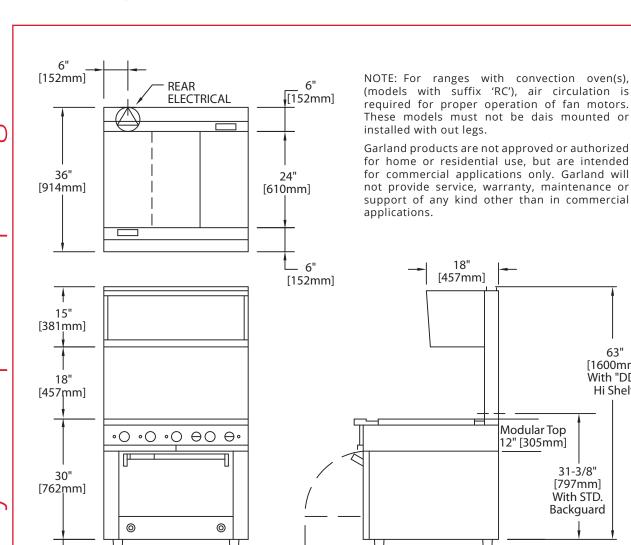

MODEL	TOTAL kW	3-PHASE kW PER PHASE ALL VOLTAGES			NOMINAL AMPERES PER LINE											
					SINGLE PHASE			THREE PHASE								
								208V		240V			460V			
		X-Y	Y-Z	X-Z	208V	240V	460V	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z
36ER32	21.5	6.5	5	10	103	91	47	69	48	64	61	43	56	31	22	28
36ES/ET32	15	5	5	5	72	64	33	42	42	42	37	37	37	19	19	19

14-1/2"

[368mm]

Д

33-3/4"

[857mm]

Shipping Cubic Feet 51, all models except 36ET32 which is 20 Cu Ft.

36"

[914mm]

CLEARANCES								
ENTRY		TO COMBUSTIBLE WALL						
CRATED	UNCRATED	SIDES	REAR*					
41-1/4"	36-1/4"	3"	1/2" (13mm)					
(1048mm)	(921mm)	(76mm)						

Garland reserves the right to make changes to the design or specifications without prior notice.



63" [1600mm] With "DD"

Hi Shelf

31-3/8"

[797mm]

With STD. Backguard

NOTE: Add 2" [51mm]

to depth for RC Models