




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

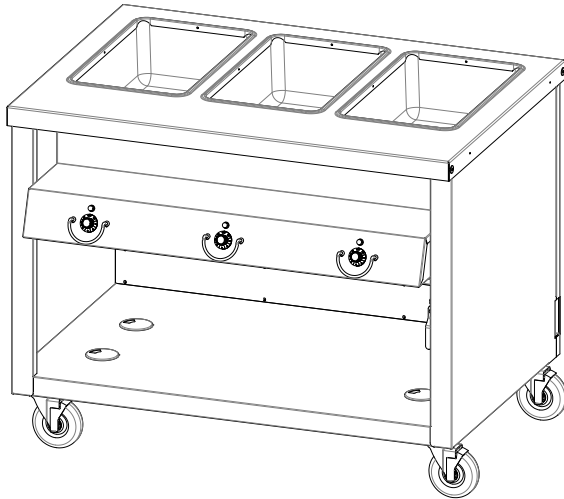

TEHF-46PG

(shown with optional foodguard)

OPTIONS:

- ☐ 14 gauge tops
- ☐ Internal locking devices
- ☐ Individual drain valves
- ☐ No drains
- ☐ Recessed top to hold - 18" x 26" sheet pans, 1" deep
- ☐ Three phase wiring
- ☐ 208V 900W Elements
- ☐ Master toggle switch w/indicator light
- ☐ Foodshields
- ☐ Workshelves
- ☐ Trayslides
- ☐ 8' or 10' cord and plug
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint colors
- ☐ 6" adjustable legs in lieu of casters
- ☐ Kickplates s/s or p/g
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34".

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke Serving Systems

Hot Food Units - Electric

- ☐ **TEHF-32** 32" length unit, 2 top openings
- ☐ **TEHF-46** 46" length unit, 3 top openings
- ☐ **TEHF-60** 60" length unit, 4 top openings
- ☐ **TEHF-74** 74" length unit, 5 top openings
- ☐ **TEHF-88** 88" length unit, 6 top openings

TOP:

- 16 gauge, 300 Series stainless steel
- Die-stamped openings - 11-7/8" x 19-7/8"

HEAT COMPARTMENTS:

- 6-1/2" deep stainless steel liners
- 120, 208 or 240 volt (must choose one)
- Infinite Switch
- 6' cord and plug
- Sealed wells with drains copper manifolded to valve

BODY:

- ☐ Choice of (12) powder coat paint colors
- ☐ Stainless steel body
- Operator's side open to bottom shelf
- Customer side and ends fully enclosed
- Bottom shelf paint grip or stainless steel to match body
- Recessed stainless steel dish shelf

Agency Listings:



Specification subject to change



WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com


SS-1167 Thurmaduke - Hot Food - Elec

Thurmaduke®




THURMADUKE SERVING SYSTEMS HOT FOOD UNITS - ELECTRIC

A.I.A. File No. 35-C-13

Catalog No. TSS-ELECHOT

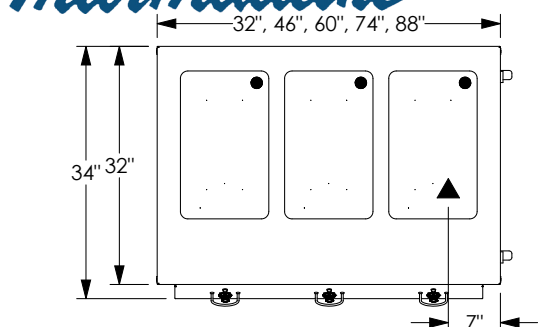

LEGEND	
▲	- ELECTRICAL CONNECTION
●	- DRAIN LOCATION - 3/4" brass, male thread, pop out screen, copper manifolds and brass master valve

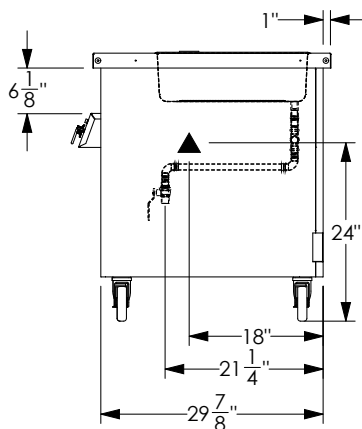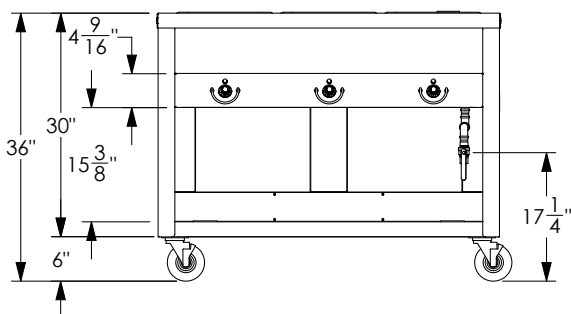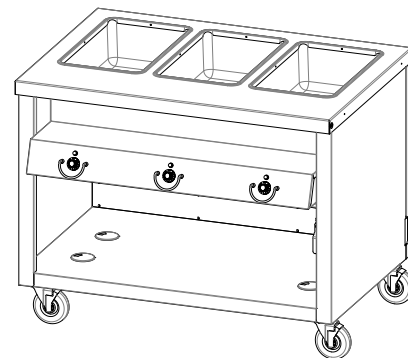

DIMENSIONS:

Freight Class: 150

Model	Length		Width		Height		Cube ft. crated	Weight		Top Openings
	in	cm	in	cm	in	cm		lbs	kg	
TEHF-32	32	81.3	32	81.3	36	91.4	34.8	253	115.0	2
TEHF-46	46	116.8	32	81.3	36	91.4	47.7	327	148.6	3
TEHF-60	60	152.4	32	81.3	36	91.4	60.5	400	181.8	4
TEHF-74	74	188.0	32	81.3	36	91.4	73.3	482	219.1	5
TEHF-88	88	223.5	32	81.3	36	91.4	86.2	595	270.5	6

ELECTRICAL SPECIFICATIONS:

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
TEHF-32	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
TEHF-46	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
TEHF-60	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
TEHF-74	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
TEHF-88	N/A	N/A	N/A	4500	21.6	L6-30	4500	18.8	L6-30
Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
TEHF-32	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
TEHF-46	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
TEHF-60	N/A	N/A	N/A	4800	23.1	L6-30	4800	20	L6-30
TEHF-74	N/A	N/A	N/A	6000	28.9	6-50	6000	25	6-50
TEHF-88	N/A	N/A	N/A	7200	34.6	6-50	7200	30	6-50

CONTACT FACTORY: Electric values & plug configurations change for 3 phase or when adding electric options.



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2025, Duke Manufacturing Co.

THURMADUKE SERVING SYSTEMS - HOT FOOD - ELECTRIC