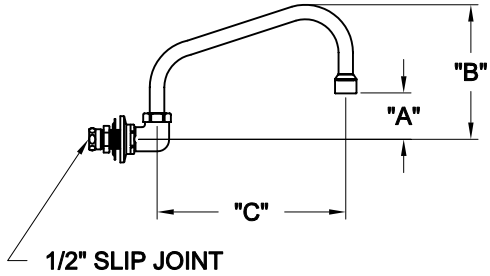



APPLICATION:		PRODUCT NAME: SINGLE BACKSPLASH BASE																													
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS																													
QUANTITY:	ITEM NO.	MODEL:																													
 1/2" SLIP JOINT <table border="1" style="margin-top: 20px; width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>3910</td> <td>2" [50.8mm]</td> <td>5-3/4" [146.1mm]</td> <td>6" [152.4mm]</td> </tr> <tr> <td>3911</td> <td>2-1/4" [57.2mm]</td> <td>6-1/4" [158.8mm]</td> <td>8" [203.2mm]</td> </tr> <tr> <td>3912</td> <td>2-7/8" [73.0mm]</td> <td>6-3/4" [171.5mm]</td> <td>10" [254.0mm]</td> </tr> <tr> <td>3913</td> <td>3-1/2" [88.9mm]</td> <td>7-1/8" [181.0mm]</td> <td>12" [304.8mm]</td> </tr> <tr> <td>3914</td> <td>4-1/4" [108.0mm]</td> <td>8-1/8" [206.4mm]</td> <td>14" [355.6mm]</td> </tr> <tr> <td>1813</td> <td>4-7/8" [123.8mm]</td> <td>8-3/4" [222.3mm]</td> <td>16" [406.4mm]</td> </tr> </tbody> </table> ROUGH-IN:  Ø7/8" [22.2mm]		MODEL	DIM "A"	DIM "B"	DIM "C"	3910	2" [50.8mm]	5-3/4" [146.1mm]	6" [152.4mm]	3911	2-1/4" [57.2mm]	6-1/4" [158.8mm]	8" [203.2mm]	3912	2-7/8" [73.0mm]	6-3/4" [171.5mm]	10" [254.0mm]	3913	3-1/2" [88.9mm]	7-1/8" [181.0mm]	12" [304.8mm]	3914	4-1/4" [108.0mm]	8-1/8" [206.4mm]	14" [355.6mm]	1813	4-7/8" [123.8mm]	8-3/4" [222.3mm]	16" [406.4mm]	☐ 3910 W/ 6" SWING SPOUT ☐ 3911 W/ 8" SWING SPOUT ☐ 3912 W/ 10" SWING SPOUT ☐ 3913 W/ 12" SWING SPOUT ☐ 3914 W/ 14" SWING SPOUT ☐ 1813 W/ 16" SWING SPOUT	
		MODEL	DIM "A"	DIM "B"	DIM "C"																										
		3910	2" [50.8mm]	5-3/4" [146.1mm]	6" [152.4mm]																										
		3911	2-1/4" [57.2mm]	6-1/4" [158.8mm]	8" [203.2mm]																										
3912	2-7/8" [73.0mm]	6-3/4" [171.5mm]	10" [254.0mm]																												
3913	3-1/2" [88.9mm]	7-1/8" [181.0mm]	12" [304.8mm]																												
3914	4-1/4" [108.0mm]	8-1/8" [206.4mm]	14" [355.6mm]																												
1813	4-7/8" [123.8mm]	8-3/4" [222.3mm]	16" [406.4mm]																												
OPTIONS OR MODIFICATIONS:		FEATURES:																													
☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH ☐ ELBOWS ☐ VANDAL RESISTANT KIT ☐ OTHER _____		* SINGLE BACKSPLASH BASE * SWING SPOUT * 1/2" SLIP JOINT SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC * 2.20 GPM AT 80 PSI SHIPPING WEIGHT * 2.0 LBS																													
 FISHER FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com		 ANSI/A112.18.1M																													