

# DESIGNER LINE BASE MODEL

## Model: DFA43NSS

Natural Refrigerant R-290 Model

*Designer Line*

### 43" Base Worktop Freezer with Solid Doors

Heavy gauge #300 Series stainless steel top, stainless steel front, end panels and interior, galvanized steel rear and grill.



## Options and Accessories

(upcharge and lead times may apply)

|                                       |                                                           |
|---------------------------------------|-----------------------------------------------------------|
| Pan slides                            | Different size casters                                    |
| Stainless steel back                  | Door locks                                                |
| Additional epoxy coated steel shelves | Front breathing                                           |
| Stainless steel shelves               | Compressor left (standard on right)                       |
| Overshelves (single or double)        | Drawers in lieu of doors**                                |
|                                       | Drawer in lieu of door section above the condensing unit* |

Consult factory for other model configurations, options and accessories.

\*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

\*\*Two-Tier drawers (larger section) accommodate: (2) 12 x 20 x 6 pans per drawer

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

Expansion valve system

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic, snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable rear and side grills

6" adjustable stainless steel legs

### MODEL FEATURES

Electronic control, automatic electric defrost

Refrigerated section with door above the condensing unit

Reversing condenser fan motor

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**NOTE:** Models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                          |                |
|----------------------------------------------------------|----------------|
| Net Capacity (cubic feet)                                | 12 (340 l)     |
| Width, Overall (inches)                                  | 43 (1092 mm)   |
| Depth, Overall (inches)<br>(including handles & bumpers) | 37 (939 mm)    |
| Height, Overall (inches)<br>(including 6" legs)          | 36 (914 mm)    |
| Shelf Area (square feet)                                 | 5.6 (0.5 sq m) |
| Number of Shelves                                        | 2              |
| Number of Full Doors                                     | 1              |
| Number of Half Doors                                     | 1              |
| Interior Depth (inches)                                  | 30 (762 mm)    |
| Interior Height (inches)                                 | 26 (660 mm)    |
| Interior Height (inches)<br>(above condenser)            | 12 ½ (318 mm)  |
| Interior Width (inches)                                  | 39 (991 mm)    |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3  |
| Capacity (BTU per hour)*    | 1030 |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Total Amps (International)                     | 6.0 (3.9)           |
| Defrost Amps (International)                   | 6.5 (4.0)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA


|                          |                |
|--------------------------|----------------|
| Weight (pounds)          | 370 (168 kg)   |
| Height - Crated (inches) | 43 ¾ (1111 mm) |
| Width - Crated (inches)  | 45 (1143 mm)   |
| Depth - Crated (inches)  | 47 (1194 mm)   |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

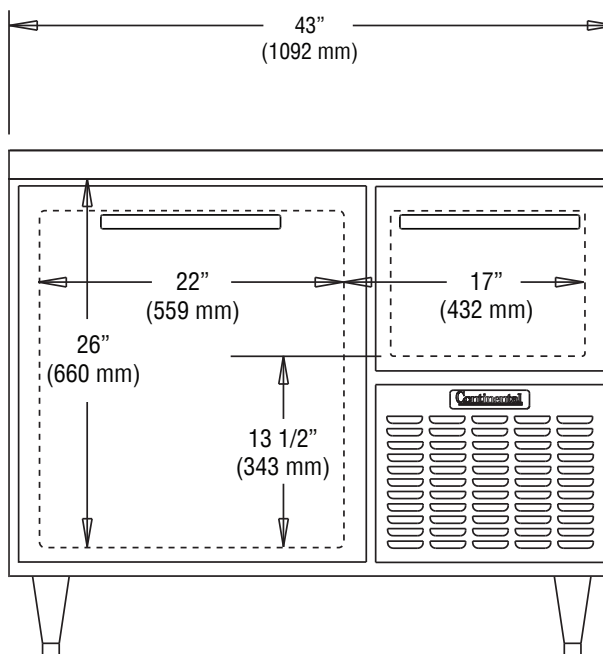

FRONT VIEW

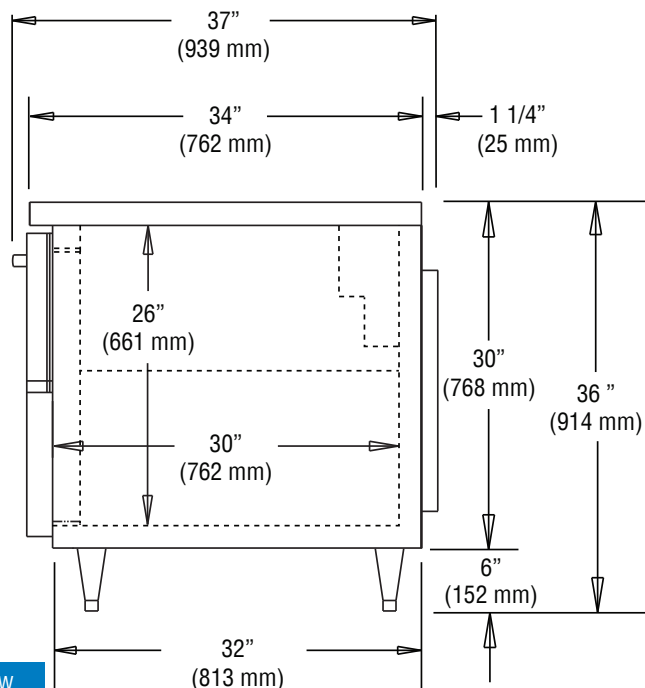

SIDE VIEW

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/11/25