

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drink Rails

DR	DR-12L, DR-12R, DR-18L, DR-18R, DR-24L, DR-24R, DR-30L, DR-30R, DR-36L, DR-36R, DR-42L, DR-42R, DR-48L, DR-48R
-----------	--

DR-36L



Intertek

4004503
 Conforms to ANSI/NSF STD 2

Specifications


Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan

Standard Features

- All stainless steel construction
- One-piece, seamless mounting deck and pan with removable perforated inserts
- 30" and 36" models have one gusset and 42" and 48" models have two gussets for added strength
- Drain consists of 1/2" tailpiece that exits from the back of the unit
- 45° and 90° inside and outside corner filler sections available
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2 stainless steel sheet metal screws, three cable clamps and one 1/2" x 1/2" x 1/2" plastic tee, 17 #10 x 1/2 black sheet metal screws
- "L" models drain left, "R" models drain right

Installation Detail

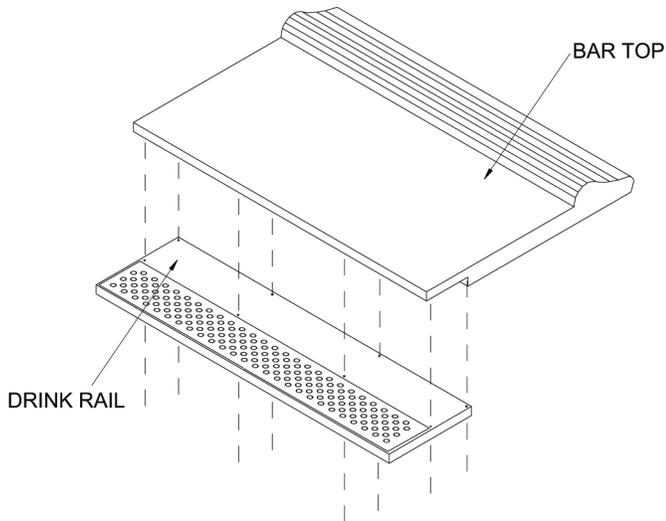

1. Apply silicone sealant to the rear mounting surface of the drink rail.
2. Install unit by securing to underside of bar top with wood screws provided.
3. If installing to material other than wood, use appropriate screws to secure.
4. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.
5. Plumb drain once installed.


Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Drink Rails


Drawings

PLAN VIEW
"R" model shown

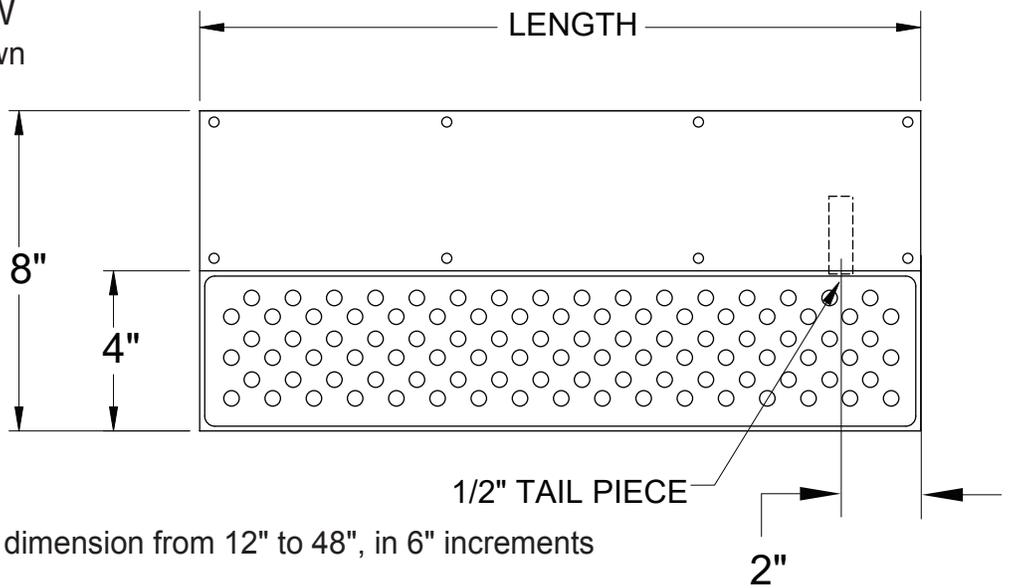

LENGTH = Left to right dimension from 12" to 48", in 6" increments

Model	Length
DR-12L/R	12"
DR-18L/R	18"
DR-24L/R	24"
DR-30L/R	30"
DR-36L/R	36"
DR-42L/R	42"
DR-48L/R	48"

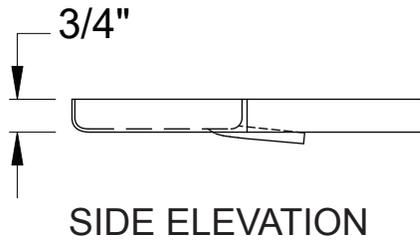

Corner Filler Model Numbers and Dimensions

