



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



Model: THCF-46

OPTIONS:

- ☐ 14ga tops
- ☐ Internal Locking Device
- ☐ No drain, dri heat only in hot mode
- ☐ Hugged edge
- ☐ Hinged framed doors (operators side)
- ☐ Foodguards
- ☐ Tray Slides
- ☐ 6" S/S legs
- ☐ Kickplates (painted or stainless)
- ☐ 34" ADA height with 3.5" adjustable casters

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1308 Thurmaduke HotCold Freeze

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL: Thurmaduke Serving System
with HotColdFreeze™ flexible well appliance

- | | |
|----------------------------------|--------|
| ☐ THCF-32 | 1 Well |
| ☐ THCF-46 | 2 Well |
| ☐ THCF-60 | 3 Well |
| ☐ THCF-76 | 4 Well |
| ☐ THCF-92 | 5 Well |

TOP and BODY:

- 16-gauge, 300 series powder coat paint or stainless steel top,
- Drop in appliance with 90-degree turndown edge
- Hinged louvered panels on operators' side

HCF:

- Flush mount with no recess
- 2.5", 4" and 6" deep pans

CONTROLS:

- Intuitive, easy to use touch screen control changes mode of operation
- 3 wet heat, 3 dry heat, 3 refrigerated and 1 freeze mode.
- 1 control per food well


Refrigeration:

- 5 Year compressor replacement
- Compressor slides out 15.375" for easy service.
- Refrigerant R290 


Serviceability:

- Unit can be serviced in counter, no need to remove.
- 10 Foot Cord Supplied.

Specification subject to change



Thurmaduke Serving System with HotColdFreeze™

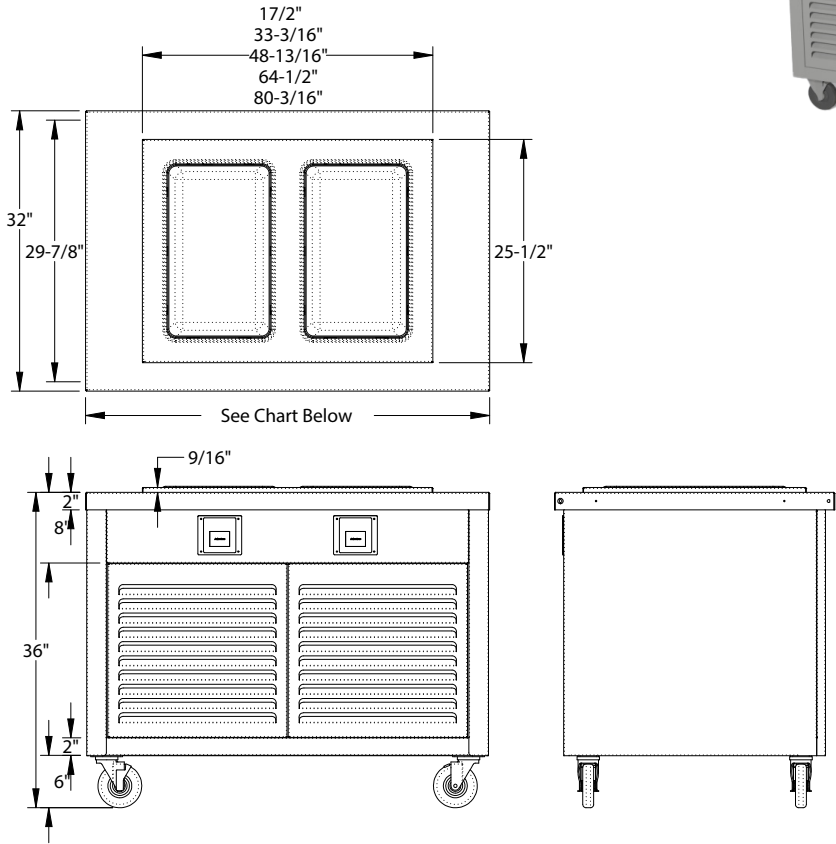

DIMENSIONS:

Freight Class: 150

Model	Height		Length		Depth		Cube ft. Crated	Crated Ship Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
THCF-32	36.0	91.44	32	81.3	32.0	81.28	34.8	280	127.0
THCF-46	36.0	91.44	46	116.8	32.0	81.28	47.7	379	171.9
THCF-60	36.0	91.44	60	152.4	32.0	81.28	60.5	425	192.8
THCF-76	36.0	91.44	76	193.1	32.0	81.28	79.2	570	258.6
THCF-92	36.0	91.44	92	233.7	32.0	81.28	95.9	634	287.6

ELECTRICAL SPECIFICATIONS:

Model	120V/60Hz		120 / 208V 60Hz		120 / 240V 60Hz		Refrigeration			Minimum Room Floor Area Required	
	Amps	NEMA	Amps	NEMA	Amps	NEMA	HP	Refrig.	Grams	(A) Square Meters (m²)	Square Feet (f²)
THCF-32	5.5	5-15P	5.5	L14-20P	5.5	L14-20P	1/3	R290 	100	4.785	51.51
THCF-46	10.7	5-15P	10.0	L14-20P	10.0	L14-20P	1/3	R290 	170	8.134	87.55
THCF-60	18.4	L5-30P	18.4	L14-30P	18.4	L14-30P	1/2	R290 	220	10.526	113.30
THCF-76	23.6	L5-30P	18.4	L14-30P	18.4	L14-30P	1/2	R290 	300	14.354	154.51
THCF-92	29.1	5-50P	28.4	14-50P	28.4	14-50P	Sys-1	1/3 R290 	170	10.526	113.30
							Sys-2	1/2 R290 	220		



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

This product may be covered by one or more patents or pending patent applications.
For more details, see www.dukemfg.com/patents

Printed in U.S.A.
© 2025, Duke Manufacturing Co.