

## 36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

### TR-36RBF-R/L-SS-A

TR-36RBF-R-SS-A (Right hinged)

TR-36RBF-L-SS-A (Left hinged)

#### FEATURES

- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Balanced refrigeration system with cascade airflow that enables even temperature throughout to keep food fresh.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Dual evaporator and dual compressor enable dedicated cooling systems for each zone.
- Environmentally friendly, r600a hydrocarbon refrigerant that improves performance and efficiency.

#### ORGANIZATION

##### Refrigerator

- 4 adjustable/removable stainless steel encapsulated glass half-shelves.
- 2 adjustable/removable door bins that allow for additional storage/organization.
- 1 adjustable/ removable stainless steel encapsulated glass full-width shelf.
- 1 fixed stainless steel encapsulated full-width glass shelf.
- 1 full-extension/full-width drawer with 2 removable dividers.
- 2 half-width, deep drawers with 2 removable dividers, ideal for produce storage.

##### Freezer

- 2 tiered drawers with nested pull-out drawer and top shelf.
- Built-in Ice Maker.

#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com/custom](http://true-residential.com/custom).




TR-36RBF-R-SS-A

#### SPECIFICATIONS

|                                   |                                                                                                                                       |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions (w x h x d)            | 36" x 84" x 24"                                                                                                                       |
| Cutout Dimensions (w x h x d)     |                                                                                                                                       |
| Flush Opening                     | 36¼" x 84¼" x 26"                                                                                                                     |
| Standard Opening                  | 35¾" x 84" x 24"                                                                                                                      |
| Total Capacity (cu. ft.)          | 22.6                                                                                                                                  |
| Capacity (cu. ft.) – Refrigerator | 17.5                                                                                                                                  |
| Capacity (cu. ft.) – Freezer      | 5.1                                                                                                                                   |
| Temperature. Range – Refrigerator | 33°F – 42 °F                                                                                                                          |
| Temperature. Range – Freezer      | -4°F – 4°F                                                                                                                            |
| Water Supply                      | ¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). <b>Note:</b> Copper line is not recommended. |
| Flow Rate (gpm/lpm)               | 0.5 / 1.89                                                                                                                            |
| Operating Pressure psi (kPa)      | 30 (207) – 100 (689)                                                                                                                  |
| Incoming Water Temperature        | 33 – 100°F (0.6 – 38°C)                                                                                                               |
| Weight (lbs.)                     | 720                                                                                                                                   |
| Voltage                           | 115/60/1  115/60/1 NEMA-5-15R                    |
| Amps                              | 1.8                                                                                                                                   |
| Annual Energy Consumption (kwh)   | 568                                                                                                                                   |
| Refrigerant Type                  | r600a                                                                                                                                 |
| Power Cord Length (ft.)           | 9                                                                                                                                     |
| Energy Star Rated                 | Yes                                                                                                                                   |

## 36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

### TR-36RBF-R/L-SS-A

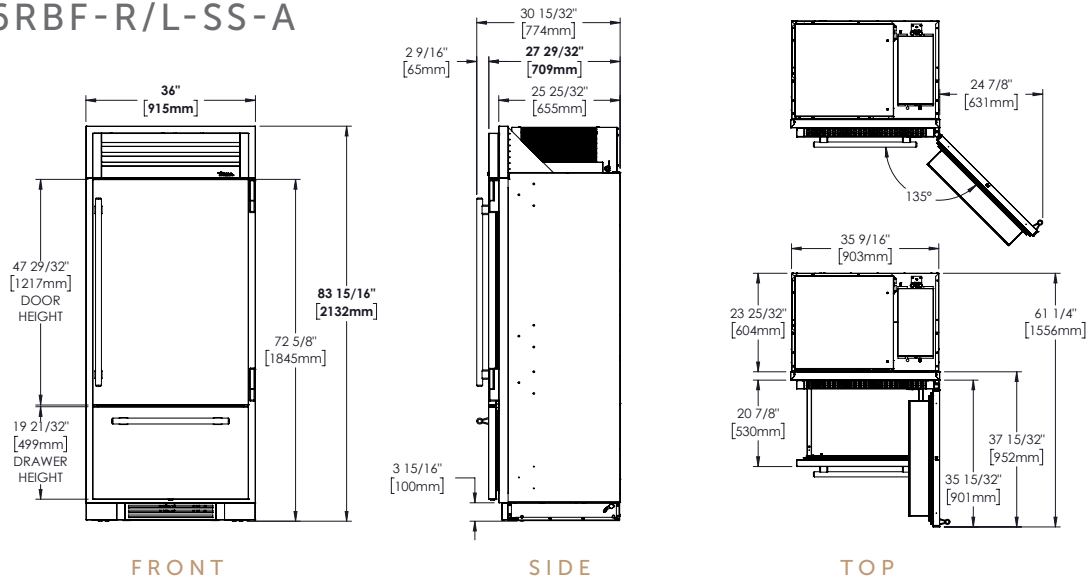


### OPENING DIMENSIONS

#### FLUSH OPENING

| WIDTH   | HEIGHT  | DEPTH |
|---------|---------|-------|
| 36 1/4" | 84 1/4" | 26"   |

#### STANDARD OPENING

| WIDTH   | HEIGHT | DEPTH |
|---------|--------|-------|
| 35 3/4" | 84"    | 24"   |

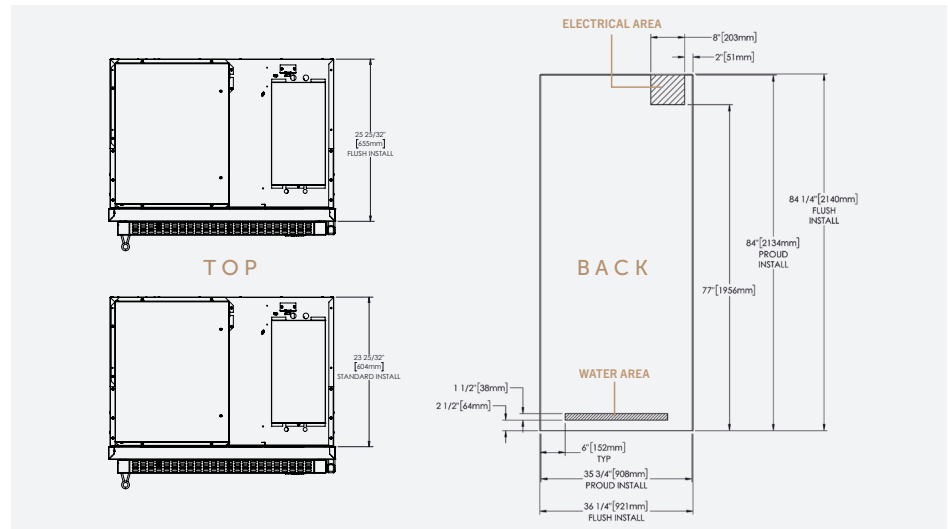

### MODEL OPTIONS

| MODEL           | FINISH                            |
|-----------------|-----------------------------------|
| TR-36RBF-R-SS-A | Stainless solid door right-hinged |
| TR-36RBF-L-SS-A | Stainless solid door left-hinged  |

### ACCESSORIES (OPTIONAL)

- Joining kit
- Side panel(s)
- 90° door stop
- Full size anti-condensation pad

### WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)