



# UF60B

## Undercounter 60" Freezer



UF60B  
06/27/25  
Item # 13629

**W x D x H**  
60" x 30" x 33.75"\*  
\*with 4" casters



### Dimensions / Capacity

### Two-Section UF60B

**Interior Storage Capacity** (CF) (AHAM)

15.1 ft<sup>3</sup>

**Overall Width x Depth** (including 1" bumper)

60" x 31"

**Height** (including 4" casters)

33.75"

**Door Opening Width x Height**

25.5" x 23"

**Depth with Door Open at 90°** (including 1" bumper)

58.5"

**Adjustable Shelves**

2

**Shelf Dimensions** (W x D)

27.25" x 16"

**Crated Weight**

310 lbs.

**Crated Length x Width x Height**

62.5" x 34" x 36.5"

### Electrical / Refrigeration

### Two-Section UF60B

**Voltage**

115/60/1

**HACR Breaker**

15.0 Amps

**Electrical Connection** (NEMA)

5-15P Ⓢ

**Voltage Range**

104-126

**Ambient Temp. Range**

45° to 100°F

**Control Setpoint Range**

-10° to 10°F

**Amperage**

4

**Energy Consumption** (kWh/day) @ASHRAE

3.95

**Heat Rejection** (BTU/Hr.) @NSF

727

**Approx. Nominal Compress. BTU/HR (HP)**

1426 (1/3HP)

**Refrigerant / Charge Amount** (oz)

R290 (2.6 oz)

### Options

- |  |   |
|--|---|
| <input type="checkbox"/> 2.25" Casters                           | <input type="checkbox"/> Additional epoxy shelves |
| <input type="checkbox"/> 6" Casters                              | <input type="checkbox"/> Stainless steel shelves  |
| <input type="checkbox"/> Stacking kit (HS-5112)                  | <input type="checkbox"/> Overshelves              |
| <input type="checkbox"/> Cylinder locks (-01 factory installed)* | <input type="checkbox"/> Foot pedal (right mount) |
|  | <input type="checkbox"/> Foot pedal (left mount)  |

\* SPECIAL ORDER- Allow 4-6 weeks lead time.



For more information, please visit  
[hoshizakiamerica.com/support/warranty/](http://hoshizakiamerica.com/support/warranty/)

Seven year warranty  
on labor, parts, and  
compressor. Valid in  
United States, Canada,  
Puerto Rico and U.S.  
Territories.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




# UF60B

## Undercounter 60" Freezer




UF60B  
06/27/25  
Item # 13629


FRONT VIEW

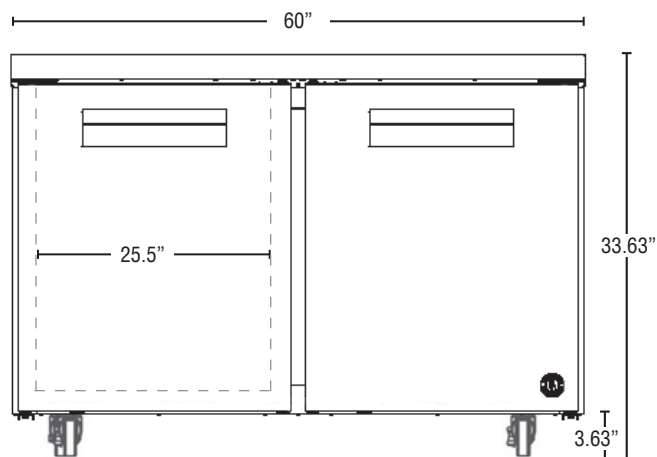

SIDE VIEW

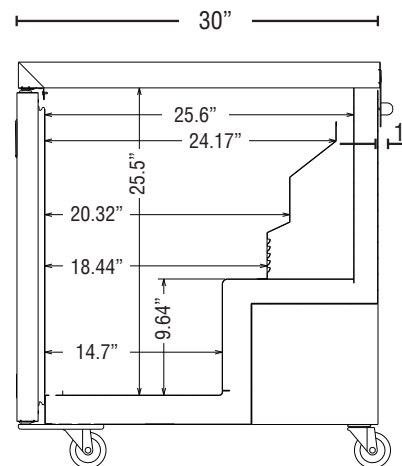

PLAN VIEW

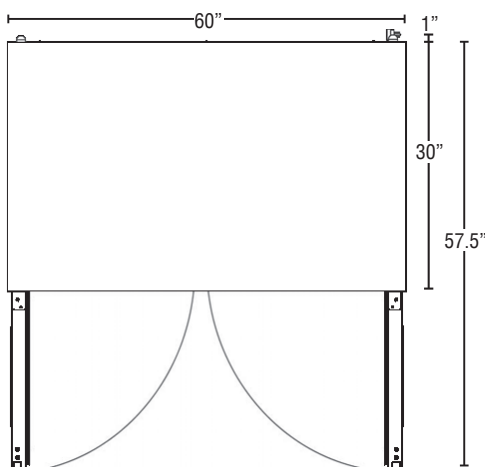

### Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with a stainless steel top. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelves are adjustable in 1/2" increments. Cabinet are insulated with 2" CFC free foamed in place polyurethane. 4" polyolefin, stem casters (two with brakes) are standard.

### Door Construction

Doors are constructed of high grade stainless steel exterior with an ABS interior liner and are insulated with 2" CFC free foamed in place polyurethane. Hoshizaki's exclusive "stepped" design protects the gasket while product is removed from the cabinet. Doors are provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing doors are equipped with a stay open feature past 90° degrees. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Field reversible door hinging is standard.

### Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Unit uses a heated, time initiated defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).