Project:	AIA#
Item:	
Location:	SIS#
Approved:	

UNDERCOUNTER REFRIGERATOR DRAWERS

UCRD72AHC Solid Door Refrigerator With Doors/Drawers Hydrocarbon Series

MODEL: UCRD72AHC-2



7 Year Parts/Labor Warranty7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, drawers and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- · Magnetic gasket attached to each door for positive seals
- Four (4) epoxy-coated steel wire shelves
- Field-reversible doors (hinge kit not included)
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- · Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (doors only)
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	UCRD72AHC-2	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	34 %"	
Number of Drawers	2	
Drawer Openings	(2) 19 ½" x 9 ¾"	
Number of Doors	2	
Depth with Door Open 90°	52 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	17.1	
Internal Width Overall (in)	68"	
Internal Depth Overall (in)	15 %"	
Internal Height Overall (in)	23"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	3.0	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1350	
Heat Rejection (BTU/Hr)	2025	
Charge (lbs/grams/ounces)	0.2646 / 120 / 4.24	
SHIPPING DATA		
Gross Weight - Crated	372 lbs	
Height - Crated	39"	
Width - Crated	75"	
Depth - Crated	33"	


^{**}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).





Undercounter Refrigerator with Doors/Drawers Model: UCRD72AHC-2

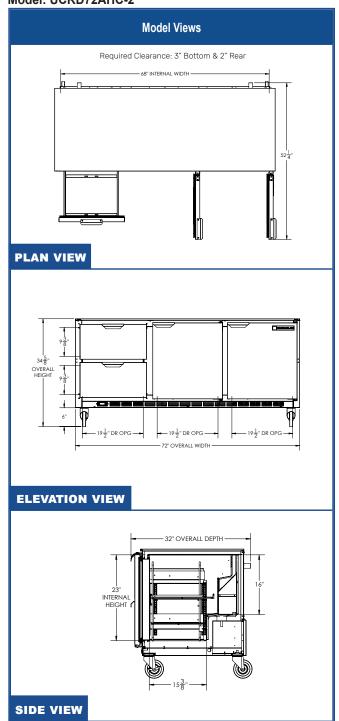

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com