



Project:	AIA#	
Item #:_	Qty:	SIS#
Model #		1 - 1 - 1

Mug Frosters

MF

MF24, MF36, MF48

Configurable Options

Finish:

- Black vinyl-clad steel with galvanized steel back (-B)
- Stainless steel front, sides, and back

Shelving:

 Two additional layers of shelves recommended for chilling glassware

Legs:

• 6"

Casters:

- 4-1/8"
- 2-7/8"
- 1-1/2"







Intertek

4004503 Conforms to NSF/ANSI STD 7 and UL STD 471 Certified to CSA STD C22.2 No. 120

Standard Features

- · Self-contained refrigeration
- All stainless steel interior with radius corners for easy cleaning
- One-piece integral top and mullion design
- Easy to plan exterior dimensions: 24" front to back and 24", 36", or 48" left to right
- Automatic and manual defrost cycles
- Automatic condensate evaporator no drain connection required
- · Bottom rack for chilling stacked plates

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Mug Frosters

Specifications

		MF24	MF36	MF48		
Dimensions	Length	24"	36"	48"		
	Number of Sections	1	1	2		
	Door Opening	n/a	n/a	n/a		
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit recommended				
	Full Load Amps	6.0				
	Plug Type	9 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*				
Refrigeration	Refrigerant	R290 - 125 grams, 4.59 oz., 0.28 pounds				
	Compressor	Reciprocating, 1/3 HP, 1300 BTUH, 0.11 Tons				
Refr	Heat Rejection	2455 BTUH				
Operating Range		12°F (-11°C) to 35°F (2°C)				
Plumbing		Interior floor drain and condensate drain to automatic evaporator. No drain connection required †				
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door				

Materials


- Stainless steel parts include: top, door, interior and optional legs. Also, front, sides and back on '-S' models
- · Black vinyl-clad steel parts include: front and sides on '-B'
- · Galvanized steel parts include: base on all models and exterior back on '-B' models


Capacities

		MF24	MF36	MF48
Pint Glasses	Top Shelf	15	31	51
	Bottom Shelf	25	25	45
	Middle Shelf	15	31	51
	Total	55	87	147

[†] Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Mug Frosters **Drawings** Two shelf configurations: 8-1/8" COIL 6-1/16" 9-3/8"* ** Thirds COIL 7-5/8"-11-1/2" *** Halves 6-1/8 9-3/8"*** 24 6-3/16' 20" 12-1/2" **PLAN VIEW** MF24* FRONT ELEVATION SIDE ELEVATION 36" MF36*, MF48* † 11-1/2" 7-1/16"

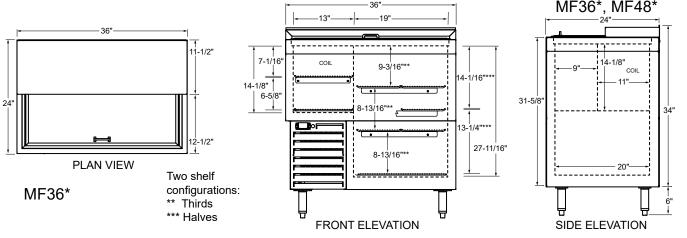

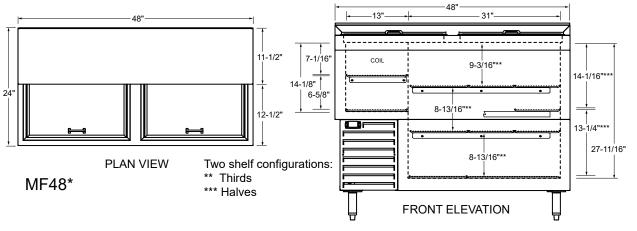



Note: Shelves are optional and are recommended for chilling glassware. All models shown with optional 6" legs.

